




LIMIT STATES DESIGN
CANADA



VERSA-LAM[®] 2.0E WESTERN SPECIFIER GUIDE

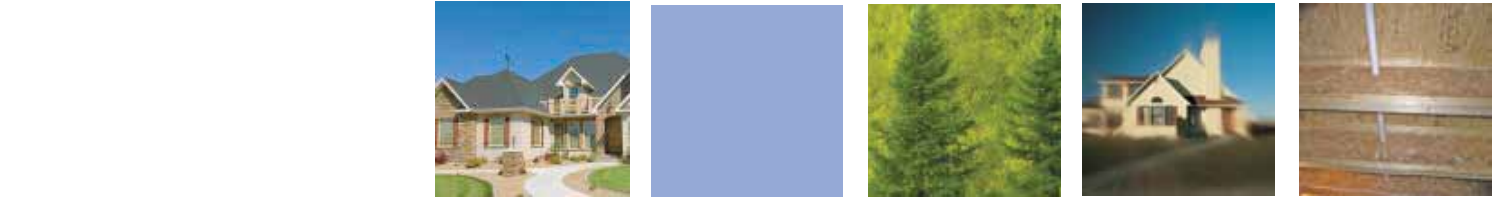

CCMC Report Number
12472-R
VERSA-LAM[®]



High Performance Floor &
Roof Systems



Boise Cascade
Engineered Wood Products





Makes Designing Homes Easier

Architects, engineers, and designers trust Boise Cascade's Engineered Wood Products to provide a better system for framing floors, roofs and walls.

It's the SIMPLE FRAMING SYSTEM®, featuring beams, joists, studs, columns and rim boards that work together as a system, so you spend less time cutting and fitting. In fact, the SIMPLE FRAMING SYSTEM® uses fewer pieces and longer lengths than conventional framing, so you'll complete jobs in less time.

You'll Build Better Homes with the SIMPLE FRAMING SYSTEM®

Now it's easier than ever to design and build better floor systems. When you specify the SIMPLE FRAMING SYSTEM®, your clients will have fewer problems with squeaky floors and ceiling gypsum board cracks. The SIMPLE FRAMING SYSTEM® also means overall better floor, roof and wall framing than dimension lumber allows.

Better Framing Doesn't Have to Cost More

Boise Cascade EWP SIMPLE FRAMING SYSTEM® often costs less than conventional framing methods when the resulting reduced labor and materials waste are considered. There's less sorting and cost associated with disposing of waste because you order only what you

need. Although our longer lengths help your clients get the job done faster, they cost no more.

Environmentally Sound

As an added bonus, floor, roof and wall systems built with Boise Cascade Joists require about half the number of trees as those built with dimension lumber. This helps you design a home both you and future generations will be proud to own.

What Makes the SIMPLE FRAMING SYSTEM® So Simple?

☑ Floor and Roof Framing with Boise Cascade Joists

Light in weight, but heavy-duty, Boise Cascade Joists have a better strength / weight ratio than dimension lumber. Knockouts can be removed for cross-ventilation and wiring.

☑ Ceilings Framed with Boise Cascade Joists

The consistent size of Boise Cascade Joists helps keep gypsum board flat and free of unsightly nail pops and ugly shadows, while keeping finish work to a minimum.

☑ VERSA-LAM® Beams for Floor and Roof Framing

☑ VERSA-STUD® and VERSA-LAM® Columns for wall Framing

These highly-stable beams are free of the large-scale defects that plague dimension beams. The result is quieter, flatter floors (no camber) and no shrinkage-related call-backs.

☑ Boise Cascade Rimboard

Boise Cascade EWP offer several engineered rimboard products regionally, including BC RIM BOARD® OSB, VERSA-RIM®, VERSA-STRAND™ 0.8 (check supplier or Boise Cascade EWP representative for availability). These products work with Alljoist® and BCI® Joists to provide a solid connection at the critical floor/wall intersection.

VERSA-LAM® Architectural Specifications 3

Product Profile, Design Properties 4

Uniform Load Table 5

Floor Beam Span Tables (One Storey) 6-7

Floor Beam Span Tables (Two Storeys) 8-9

Ridge Beam Span Tables 10-11

Header Span Tables - Roof Only 12-13

Header Span Tables (Roof + One Storey, no center bearing) 14-15

Header Span Tables (Roof + One Storey, center bearing) 16-17

Header Span Tables (Roof + Two Storeys, center bearing) 18-19

Scarf Cut, Closest Allowable Nail Spacing 20

Scarf Cut Con't, Minimum Bearing Length per Bearing Width 21

Multiple Beam Connections - Uniform Side Loads 22

Multiple Beam Connections - Concentrated Side Loads and Top Load 23

VERSA-LAM® Details, Allowable Holes in VERSA-LAM® Beams 24

Column Design (Maximum Factored Axial Loads (Lbs)) 25

VERSA-STUD® & VERSA-LAM® Column Details 25

Rimboard Profile - Boise Cascade Rimboard Properties 26

Weights of Building Materials 27

Distributor Locations Back Cover

Scope: This work includes the complete furnishing and installation of all VERSA-LAM® beams as shown on the drawings, herein special and necessary to complete the work.

Materials: Douglas Fir veneer, laminated in a press with all grain parallel with the length of the member. Glue used in lamination is phenol formaldehyde and isocyanate exterior type adhesive which comply with CSA O112 standards. All adhesives are compliant to NBCC2010 and CCMC requirements for dry use structural applications.

Design: The VERSA-LAM® beams shall be sized and detailed to fit the dimensions and loads indicated on the plans. All designs are in accordance with allowable values developed with ASTM D5456 and CSA O86-09 and listed in the Canadian Construction Materials Center CCMC 12472-R report and section properties based upon standard engineering principles. Verification of design of the beams by complete calculations shall be available upon request.

Drawings: Additional drawings showing layout and detail necessary for determining fit and placement in the buildings are (are not) to be provided by supplier.

Fabrication: The VERSA-LAM® beams shall be manufactured in a plant evaluated for fabrication by the CCMC under the supervision of a third-party inspection agency listed by the CCMC.

Storage: The VERSA-LAM® beams, if stored prior to erection, shall be stored on stickers spaced a maximum of 15 ft. apart. Beams shall be stored on a dry, level surface and protected from the weather. They shall be handled with care so they are not damaged.

Installation: The VERSA-LAM® beams are to be installed in accordance with the plans and Boise Cascade Engineered Wood Products Installation Guide. Temporary construction loads which cause stresses beyond design limits are not permitted. Erection bracing shall be provided to assure adequate lateral support for the individual beams and the entire system until the sheathing material has been applied.



Codes: The design shall be based on CSA O86-09 and the National Building Code of Canada. The VERSA-LAM® beams shall be evaluated by the CCMC evaluation service.

Lifetime Guaranteed Quality and Performance

Boise Cascade warrants its BCI® Joist, VERSA-LAM®, and ALLJOIST® products to comply with our specifications, to be free from defects in material and workmanship, and to meet or exceed our performance specifications for the normal and expected life of the structure when correctly stored, installed and used according to our Installation Guide.

For information about Boise Cascade's Engineered Wood Products, including sales terms and conditions, warranties and disclaimers, visit our website at


www.bcewp.com

Boise Cascade Chain-of-Custody Certifications

Boise Cascade Engineered Wood Products has a proven track record of providing quality wood products and a nationwide building materials distribution network for our customers, helping them to enhance their own businesses.

Boise Cascade Engineered Wood Products build better homes with stronger, stiffer floors using only wood purchased in compliance with a number of green building programs. Take a moment to view our sustainability certification site at <http://www.bc.com/sustainability/certification.html> or view our green brochure at http://www.bc.com/wood/ewp/Boise_EWP_Green.html.

Boise Cascade Engineered Wood Products throughout North America can now be ordered FSC® Chain-of-Custody (COC) certified, enabling homebuilders to achieve LEED® points residential and commercial green building programs including LEED for Homes and LEED for New Construction. Boise Cascade Engineered Wood Products are available as PEFC® Chain-of-Custody certified, SFI® Chain-of-Custody certified and SFI® Fiber-Sourcing certified, as well as NAHB Research Center Green Approved, enabling homebuilders to also obtain green building points through the Green Building Standards.

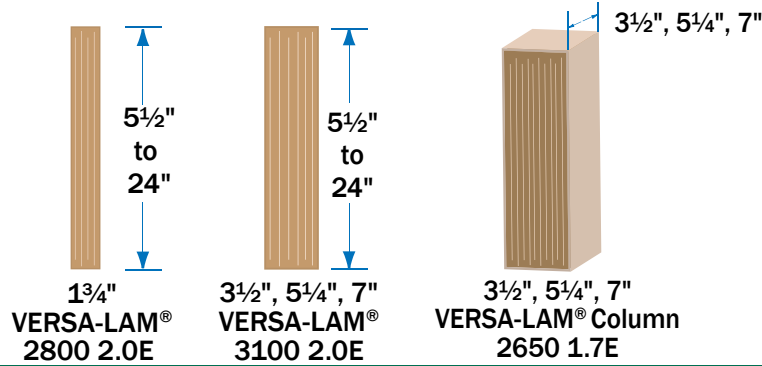

DESIGN PROPERTIES

Width	Depth	Size factor	Weight	Factored Shear Resistance (Joist), V_r	Factored Bending Resistance (Joist), M_r	Stiffness, EI	Modulus of Elasticity, E	Specified Bending Strength (Joist), f_b	Specified Shear Strength (Joist), f_v	Specified Compression Parallel to Grain, f_c	Specified Compression Perpendicular to Grain, f_{cp}
(in)	(in)		(lb/ft)	(lb)	(lb-ft)	(x10 ⁶ lb-in ²)	(x10 ⁶ psi)	(psi)	(psi)	(psi)	(psi)
VERSA-LAM® COLUMN 2650Fb 1.7E DESIGN PROPERTIES											
3 1/2	3 1/2	1.15	3.1	4 263	3 246	21	1.7	5 281	580	4 396	1 525
3 1/2	5 1/4	1.10	4.7	6 395	6 981	72					
3 1/2	7	1.06	6.3	8 526	12 020	170					
5 1/4	5 1/4	1.10	7.1	9 592	10 471	108					
5 1/4	7	1.06	9.4	12 789	18 030	255					
7	7	1.06	12.6	17 052	24 040	340					
VERSA-LAM® 2800Fb 2.0E DESIGN PROPERTIES											
1 1/4	5 1/2	1.09	2.5	3 350	4 116	49	2.0	5 704	580	5 300	1 525
	7 1/4	1.06	3.3	4 415	6 936	111					
	9 1/4	1.03	4.2	5 633	10 989	231					
	9 1/2	1.03	4.3	5 786	11 557	250					
	11 1/4	1.01	5.1	6 851	15 905	415					
	11 1/2	1.00	5.3	7 232	17 616	488					
	14	0.98	6.3	8 526	24 041	800					
	16	0.97	7.2	9 744	30 938	1 195					
	18	0.96	8.1	10 962	38 646	1 701					
20	0.94	9.0	12 180	47 156	2 333						
VERSA-LAM® 3100Fb 2.0E DESIGN PROPERTIES											
3 1/2	7 1/4	1.06	6.5	8 831	15 249	222	2.0	6 270	580	5 300	1 525
	9 1/4	1.03	8.3	11 267	24 160	462					
	9 1/2	1.03	8.5	11 571	25 408	500					
	11 1/4	1.01	10.1	13 703	34 968	831					
	11 1/2	1.00	10.7	14 464	38 727	977					
	14	0.98	12.6	17 052	52 852	1 601					
	16	0.97	14.4	19 488	68 015	2 389					
	18	0.96	16.2	21 924	84 962	3 402					
20	0.94	18.0	24 360	103 671	4 667						
5 1/4	7 1/4	1.06	9.8	13 246	22 873	333	2.0	6 270	580	5 300	1 525
	9 1/4	1.03	12.5	16 900	36 239	692					
	9 1/2	1.03	12.8	17 357	38 112	750					
	11 1/4	1.01	15.2	20 554	52 451	1 246					
	11 1/2	1.00	16.0	21 696	58 091	1 465					
	14	0.98	18.9	25 578	79 278	2 401					
	16	0.97	21.6	29 232	102 022	3 584					
	18	0.96	24.3	32 886	127 443	5 103					
20	0.94	27.0	36 540	155 506	7 000						
7	7 1/4	1.06	13.0	17 661	30 498	445	2.0	6 270	580	5 300	1 525
	9 1/4	1.03	16.6	22 533	48 319	923					
	9 1/2	1.03	17.1	23 142	50 815	1 000					
	11 1/4	1.01	20.2	27 405	69 935	1 661					
	11 1/2	1.00	21.4	28 928	77 455	1 954					
	14	0.98	25.2	34 104	105 704	3 201					
	16	0.97	28.8	38 976	136 030	4 778					
	18	0.96	32.4	43 848	169 924	6 804					
20	0.94	36.0	48 720	207 341	9 333						

NOTES:

- Repetitive member factor has not been applied to the Factored Bending Resistance.
- Size factors have been applied to the Factored Bending Resistance.
- VERSA-LAM® Specific Gravity for fasteners design = 0.5
- Specified compression perpendicular to grain on plank orientation (plate) is 809 psi.

VLWSP2.0 - CANADA December 2011

UNIFORM LOAD TABLE

VERSA-LAM® 2800Fb 2.0E (1¾") Allowable Uniform Load (lbs/ft)

Design Span [ft]	Beam Thickness	1¾" - 1 Ply							
	Beam Depth	7¼"	9¼"	9½"	11¼"	11½"	14"	16"	18"
6' - 0"	Unfactored Live Load for L / 360 [plf]	762	-	-	-	-	-	-	-
	Unfactored Total Load for L / 240 [plf]	-	-	-	-	-	-	-	-
	Factored Total Load, Wf [plf]	1399	1885	1950	2429	2613	3293		
	Bearing Lengths [End / Intermediate] - SPF Plate [in]	4 / 10	5½ / 13¼	5½ / 13¼	7 / 17	7½ / 18¼	9.25 / 23		
	Bearing Lengths [End / Intermediate] - beam [in]	2 / 5	2¼ / 6¼	2¼ / 7	3½ / 8¼	3¾ / 9¼	4.75 / 11.75		
8' - 0"	Unfactored Live Load for L / 360 [plf]	321	667	723	-	-	-	-	-
	Unfactored Total Load for L / 240 [plf]	478	-	-	-	-	-	-	-
	Factored Total Load, Wf [plf]	947	1326	1369	1679	1796	2216	2649	
	Bearing Lengths [End / Intermediate] - SPF Plate [in]	3¾ / 9	5 / 12½	5¼ / 12¼	6¼ / 15¼	6¾ / 16¼	8.25 / 20.75	10 / 24.75	
	Bearing Lengths [End / Intermediate] - beam [in]	2 / 4½	2½ / 6¼	2¾ / 6½	3¾ / 8	3¾ / 8½	4.25 / 10.5	5 / 12.5	
10' - 0"	Unfactored Live Load for L / 360 [plf]	164	341	370	615	723	-	-	-
	Unfactored Total Load for L / 240 [plf]	243	508	550	-	-	-	-	-
	Factored Total Load, Wf [plf]	604	959	1009	1282	1367	1669	1973	
	Bearing Lengths [End / Intermediate] - SPF Plate [in]	3 / 7¼	4¼ / 11¼	4¼ / 11¼	6 / 15	6½ / 16	8 / 19.5	9.25 / 23	
	Bearing Lengths [End / Intermediate] - beam [in]	1½ / 3¼	2¼ / 5¼	2½ / 6	3¼ / 7¼	3¾ / 8¼	4 / 10	4.75 / 11.75	
12' - 0"	Unfactored Live Load for L / 360 [plf]	95	197	214	355	418	686	1024	-
	Unfactored Total Load for L / 240 [plf]	139	292	316	528	622	-	-	-
	Factored Total Load, Wf [plf]	418	664	699	963	1067	1326	1571	1817
	Bearing Lengths [End / Intermediate] - SPF Plate [in]	2½ / 6	3¾ / 9½	4 / 9¼	5½ / 13½	6 / 15	7.5 / 18.5	9 / 22	10.25 / 25.5
	Bearing Lengths [End / Intermediate] - beam [in]	1½ / 3½	2 / 4¼	2 / 5	2¾ / 7	3¼ / 7¼	3.75 / 9.5	4.5 / 11.25	5.25 / 13
14' - 0"	Unfactored Live Load for L / 360 [plf]	59	124	134	224	263	432	644	918
	Unfactored Total Load for L / 240 [plf]	86	182	197	330	389	641	-	-
	Factored Total Load, Wf [plf]	306	486	512	706	782	972	1252	1502
	Bearing Lengths [End / Intermediate] - SPF Plate [in]	2 / 5	3¼ / 8	3½ / 8½	4¼ / 11½	5¼ / 12¼	6.5 / 16	8.25 / 20.5	10 / 24.5
	Bearing Lengths [End / Intermediate] - beam [in]	1½ / 3½	1¾ / 4	1¾ / 4¼	2½ / 6	2¾ / 6½	3.25 / 8	4.25 / 10.5	5 / 12.5
16' - 0"	Unfactored Live Load for L / 360 [plf]	40	83	90	150	176	289	432	615
	Unfactored Total Load for L / 240 [plf]	56	120	130	219	258	427	-	-
	Factored Total Load, Wf [plf]	233	371	390	538	597	742	957	1196
	Bearing Lengths [End / Intermediate] - SPF Plate [in]	1¾ / 4½	3 / 7	3 / 7½	4¼ / 10¼	4½ / 11¼	5.75 / 14	7.25 / 18	9 / 22.25
	Bearing Lengths [End / Intermediate] - beam [in]	1½ / 3½	1½ / 3½	1½ / 3¾	2¼ / 5¼	2¾ / 5¾	3 / 7	3.75 / 9	4.5 / 11.25
18' - 0"	Unfactored Live Load for L / 360 [plf]		58	63	105	124	203	303	432
	Unfactored Total Load for L / 240 [plf]		83	90	152	180	298	447	-
	Factored Total Load, Wf [plf]		292	307	424	470	585	754	943
	Bearing Lengths [End / Intermediate] - SPF Plate [in]		2½ / 6¼	2¾ / 6½	3¾ / 9	4 / 10	5 / 12.25	6.5 / 16	8 / 19.75
	Bearing Lengths [End / Intermediate] - beam [in]		1½ / 3½	1½ / 3½	2 / 4½	2 / 5	2.5 / 6.25	3.25 / 8	4 / 10
20' - 0"	Unfactored Live Load for L / 360 [plf]		42	46	76	90	148	221	314
	Unfactored Total Load for L / 240 [plf]		59	64	109	129	215	324	464
	Factored Total Load, Wf [plf]		235	247	342	379	472	609	762
	Bearing Lengths [End / Intermediate] - SPF Plate [in]		2¼ / 5½	2½ / 6	3¼ / 8	3¾ / 9	4.5 / 11	5.75 / 14.25	7.25 / 17.75
	Bearing Lengths [End / Intermediate] - beam [in]		1½ / 3½	1½ / 3½	1¾ / 4¼	2 / 4¼	2.25 / 5.75	3 / 7.25	3.75 / 9
22' - 0"	Unfactored Live Load for L / 360 [plf]				57	67	111	166	236
	Unfactored Total Load for L / 240 [plf]				80	95	160	242	346
	Factored Total Load, Wf [plf]				281	312	389	501	628
	Bearing Lengths [End / Intermediate] - SPF Plate [in]				3 / 7¼	3¼ / 8	4 / 10	5.25 / 13	6.5 / 16.25
	Bearing Lengths [End / Intermediate] - beam [in]				1½ / 3¾	1¾ / 4¼	2.25 / 5.25	2.75 / 6.5	3.25 / 8.25
24' - 0"	Unfactored Live Load for L / 360 [plf]				44	52	85	127	182
	Unfactored Total Load for L / 240 [plf]				61	72	122	184	265
	Factored Total Load, Wf [plf]				235	261	325	420	526
	Bearing Lengths [End / Intermediate] - SPF Plate [in]				2¾ / 6¼	3 / 7½	3.75 / 9.25	4.75 / 11.75	6 / 14.75
	Bearing Lengths [End / Intermediate] - beam [in]				1½ / 3½	1½ / 3¾	2 / 4.75	2.5 / 6	3 / 7.5
26' - 0"	Unfactored Live Load for L / 360 [plf]					41	67	100	143
	Unfactored Total Load for L / 240 [plf]					55	94	143	206
	Factored Total Load, Wf [plf]					221	276	356	446
	Bearing Lengths [End / Intermediate] - SPF Plate [in]					2¾ / 6¼	3.5 / 8.5	4.5 / 11	5.5 / 13.5
	Bearing Lengths [End / Intermediate] - beam [in]					1½ / 3½	1.75 / 4.25	2.25 / 5.5	2.75 / 7
28' - 0"	Unfactored Live Load for L / 360 [plf]						53	80	114
	Unfactored Total Load for L / 240 [plf]						74	113	164
	Factored Total Load, Wf [plf]						237	306	383
	Bearing Lengths [End / Intermediate] - SPF Plate [in]						3.25 / 7.75	4 / 10	5 / 12.5
	Bearing Lengths [End / Intermediate] - beam [in]						1.75 / 4	2.25 / 5.25	2.75 / 6.5
30' - 0"	Unfactored Live Load for L / 360 [plf]						43	65	93
	Unfactored Total Load for L / 240 [plf]						59	91	131
	Factored Total Load, Wf [plf]						205	265	333
	Bearing Lengths [End / Intermediate] - SPF Plate [in]						3 / 7.25	3.75 / 9.5	4.75 / 11.75
	Bearing Lengths [End / Intermediate] - beam [in]						1.5 / 3.75	2 / 4.75	2.5 / 6

NOTES:

- Factored Total Load values are limited by shear or moment. Total Load values are given by the beam capacity in addition to its own weight.
- Unfactored Live Load values are limited by deflection equal to L / 360. For deflections limited to L / 480, multiply live load values by 0.75 (recommended for less vibration).
- All 3 loading cases must be checked. Where a Live Load value is not shown, the Factored Total Load value will control.
- Table values represent the most restrictive of simple or continuous span beams applications and assume a uniform loading. Span is measured center to center of the supports. Analyze continuous span beams with the BC CALC® software if the length of any span is less than half the length of an adjacent span.
- Table values assume that lateral support is provided at each support and continuously along the compression edge of the beam.
- Table values for Minimum Required Bearing Lengths are based on the allowable compression design value perpendicular to grain for the beam and the Total Factored Load value shown. Other design considerations, such as a weaker support material, may warrant longer bearing lengths. Table values assume that support is provided across the full width of the beam.
- For 2-ply, 3-ply or 4-ply beams; double, triple or quadruple the Factored Total Load, Unfactored Live and Total Load values. Minimum Required Bearing Lengths remain the same for any number of plies.
- 1¼ inch members deeper than 14 inches are recommended to be used as multiple-member beams. Refer to pages 22-23 for connection details.
- This table was designed to apply to a broad range of applications. It may be possible to exceed the limitations of this table by analyzing a specific application with the BC CALC® software.


FLOOR BEAM SPAN TABLES (TWO STOREYS)

VERSA-LAM® 2800Fb 2.0E (1¾")

Beam Depth		Live Load of 40 psf						Dead Load of 15 psf						L/360					
		9.5"		11.875"		14"		16"		18"		2 ply		3 ply		4 ply			
Tributary Width [ft]	6	11'-4"	13'-0"	14'-3"	14'-2"	16'-3"	17'-10"	16'-9"	19'-1"	21'-0"	19'-1"	21'-10"	23'-11"	21'-6"	24'-6"	26'-10"			
		End/Int bearing_SPF Plate (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.6/4	1.5/3.5	1.5/3.5	1.9/4.7	1.5/3.6	1.5/3.5	2.2/5.3	1.6/4	1.5/3.5	2.4/6	1.8/4.5	1.5/3.7		
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5			
	7.5	10'-5"	11'-11"	13'-1"	13'-0"	14'-11"	16'-5"	15'-4"	17'-7"	19'-3"	17'-7"	20'-0"	22'-0"	19'-9"	22'-6"	24'-9"			
	End/Int bearing_SPF Plate (in)	1.6/3.9	1.5/3.5	1.5/3.5	2/4.8	1.5/3.7	1.5/3.5	2.3/5.7	1.8/4.3	1.5/3.6	2.6/6.5	2/4.9	1.7/4.1	2.9/7.3	2.3/5.6	1.9/4.6			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.7	1.5/3.5	1.5/3.5			
	10	9'-8"	11'-1"	12'-3"	12'-2"	13'-11"	15'-4"	14'-4"	16'-5"	18'-0"	16'-4"	18'-9"	20'-7"	18'-5"	21'-1"	23'-2"			
	End/Int bearing_SPF Plate (in)	1.8/4.5	1.5/3.5	1.5/3.5	2.3/5.6	1.8/4.3	1.5/3.6	2.7/6.6	2.1/5.1	1.7/4.2	3.1/7.6	2.3/5.8	1.9/4.8	3.4/8.5	2.6/6.5	2.2/5.4			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.6/3.8	1.5/3.5	1.5/3.5	1.8/4.3	1.5/3.5	1.5/3.5			
	12	9'-2"	10'-5"	11'-6"	11'-5"	13'-1"	14'-5"	13'-6"	15'-5"	17'-0"	15'-5"	17'-8"	19'-5"	17'-4"	19'-10"	21'-10"			
	End/Int bearing_SPF Plate (in)	2.1/5.1	1.6/3.9	1.5/3.5	2.6/6.3	2/4.9	1.6/4	3/7.5	2.3/5.7	1.9/4.7	3.4/8.5	2.6/6.5	2.2/5.4	3.9/9.6	3/7.3	2.5/6.1			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.8	1.5/3.5	1.5/3.5	1.8/4.3	1.5/3.5	1.5/3.5	2/4.9	1.5/3.7	1.5/3.5			
	14	8'-8"	9'-11"	10'-11"	10'-10"	12'-5"	13'-8"	12'-10"	14'-8"	16'-2"	14'-8"	16'-9"	18'-5"	16'-6"	18'-10"	20'-9"			
	End/Int bearing_SPF Plate (in)	2.3/5.6	1.8/4.3	1.5/3.6	2.8/7	2.2/5.4	1.8/4.4	3.3/8.3	2.6/6.3	2.1/5.2	3.8/9.4	2.9/7.2	2.4/6	4.3/10.6	3.3/8.1	2.7/6.7			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.6	1.5/3.5	1.5/3.5	1.7/4.2	1.5/3.5	1.5/3.5	1.9/4.8	1.5/3.7	1.5/3.5	2.2/5.4	1.7/4.1	1.5/3.5			
	16	8'-3"	9'-6"	10'-5"	10'-4"	11'-11"	13'-1"	12'-2"	14'-0"	15'-5"	13'-11"	16'-0"	17'-8"	15'-8"	18'-0"	19'-10"			
	End/Int bearing_SPF Plate (in)	2.5/6.1	1.9/4.7	1.6/3.9	3.1/7.6	2.4/5.9	2/4.9	3.6/9	2.8/6.9	2.3/5.7	4.1/10.3	3.2/7.9	2.6/6.5	4.6/11.5	3.6/8.9	3/7.3			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.6/3.9	1.5/3.5	1.5/3.5	1.9/4.6	1.5/3.5	1.5/3.5	2.1/5.2	1.6/4	1.5/3.5	2.4/5.8	1.8/4.5	1.5/3.7			
	18	7'-6"	9'-2"	10'-1"	9'-5"	11'-5"	12'-7"	11'-1"	13'-6"	14'-10"	12'-8"	15'-1"	17'-0"	14'-3"	17'-4"	19'-1"			
	End/Int bearing_SPF Plate (in)	2.5/6.3	2.1/5.1	1.7/4.2	3.2/7.8	2.6/6.3	2.1/5.2	3.7/9.2	3/7.5	2.5/6.2	4.2/10.5	3.4/8.5	2.8/7	4.7/11.8	3.9/9.6	3.2/7.9			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.6/4	1.5/3.5	1.5/3.5	1.9/4.7	1.5/3.8	1.5/3.5	2.2/5.3	1.8/4.3	1.5/3.6	2.4/6	2/4.9	1.6/4			
	20	6'-11"	8'-10"	9'-8"	8'-8"	11'-0"	12'-2"	10'-2"	13'-0"	14'-4"	11'-8"	14'-10"	16'-4"	13'-1"	16'-9"	18'-5"			
	End/Int bearing_SPF Plate (in)	2.6/6.4	2.2/5.4	1.8/4.5	3.2/8	2.8/6.8	2.3/5.6	3.8/9.4	3.2/8	2.7/6.6	4.3/10.7	3.7/9.1	3.1/7.6	4.9/12.1	4.1/10.3	3.4/8.5			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.6/4	1.5/3.5	1.5/3.5	1.9/4.8	1.7/4.1	1.5/3.5	2.2/5.4	1.9/4.6	1.6/3.8	2.5/6.1	2.1/5.2	1.8/4.3			

Beam Depth		Live Load of 40 psf						Dead Load of 25 psf						L/360					
		9.5"		11.875"		14"		16"		18"		2 ply		3 ply		4 ply			
Tributary Width [ft]	6	10'-10"	12'-4"	13'-7"	13'-6"	15'-5"	17'-0"	15'-11"	18'-2"	20'-0"	18'-2"	20'-9"	22'-10"	20'-6"	23'-4"	25'-8"			
	End/Int bearing_SPF Plate (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.8/4.4	1.5/3.5	1.5/3.5	2.1/5.1	1.6/3.9	1.5/3.5	2.4/5.9	1.8/4.5	1.5/3.7	2.7/6.6	2/5	1.7/4.1			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5			
	8	9'-11"	11'-4"	12'-6"	12'-5"	14'-2"	15'-7"	14'-7"	16'-8"	18'-4"	16'-8"	19'-1"	20'-11"	18'-9"	21'-5"	23'-7"			
	End/Int bearing_SPF Plate (in)	1.7/4.3	1.5/3.5	1.5/3.5	2.2/5.3	1.7/4.1	1.5/3.5	2.5/6.3	1.9/4.8	1.6/3.9	2.9/7.1	2.2/5.5	1.8/4.5	3.2/8	2.5/6.1	2/5			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.6	1.5/3.5	1.5/3.5	1.7/4.1	1.5/3.5	1.5/3.5			
	10	9'-3"	10'-7"	11'-8"	11'-7"	13'-3"	14'-6"	13'-8"	15'-7"	17'-2"	15'-7"	17'-10"	19'-7"	17'-6"	20'-0"	22'-0"			
	End/Int bearing_SPF Plate (in)	2/5	1.6/3.8	1.5/3.5	2.5/6.2	1.9/4.7	1.6/3.9	2.9/7.3	2.3/5.6	1.9/4.6	3.4/8.3	2.6/6.4	2.1/5.2	3.8/9.4	2.9/7.1	2.4/5.9			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.7	1.5/3.5	1.5/3.5	1.7/4.2	1.5/3.5	1.5/3.5	1.9/4.7	1.5/3.6	1.5/3.5			
	12	8'-9"	10'-0"	11'-0"	10'-11"	12'-6"	13'-9"	12'-10"	14'-9"	16'-2"	14'-7"	16'-10"	18'-6"	16'-4"	18'-11"	20'-10"			
	End/Int bearing_SPF Plate (in)	2.3/5.6	1.8/4.3	1.5/3.6	2.8/7	2.2/5.4	1.8/4.4	3.3/8.3	2.6/6.3	2.1/5.2	3.8/9.4	2.9/7.2	2.4/5.9	4.2/10.5	3.3/8.1	2.7/6.7			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.6	1.5/3.5	1.5/3.5	1.7/4.2	1.5/3.5	1.5/3.5	1.9/4.7	1.5/3.7	1.5/3.5	2.1/5.3	1.7/4.1	1.5/3.5			
	14	8'-2"	9'-6"	10'-6"	10'-3"	11'-11"	13'-1"	11'-11"	14'-0"	15'-5"	13'-7"	16'-0"	17'-7"	15'-2"	18'-0"	19'-10"			
	End/Int bearing_SPF Plate (in)	2.5/6.1	1.9/4.8	1.6/3.9	3.1/7.7	2.4/6	2/4.9	3.6/9	2.8/7	2.3/5.8	4.1/10.1	3.2/8	2.7/6.6	4.6/11.3	3.6/9	3/7.4			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.6/3.9	1.5/3.5	1.5/3.5	1.8/4.5	1.5/3.6	1.5/3.5	2.1/5.1	1.7/4.1	1.5/3.5	2.3/5.7	1.9/4.6	1.5/3.8			
	16	7'-4"	9'-1"	10'-0"	9'-2"	11'-5"	12'-6"	10'-10"	13'-5"	14'-9"	12'-4"	15'-1"	16'-11"	13'-11"	17'-3"	19'-0"			
	End/Int bearing_SPF Plate (in)	2.6/6.3	2.1/5.2	1.8/4.3	3.2/7.9	2.6/6.5	2.2/5.4	3.7/9.3	3.1/7.7	2.6/6.3	4.3/10.6	3.5/8.8	2.9/7.2	4.8/11.9	4/9.8	3.3/8.1			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.6/4	1.5/3.5	1.5/3.5	1.9/4.7	1.6/3.9	1.5/3.5	2.2/5.4	1.8/4.4	1.5/3.7	2.4/6	2/5	1.7/4.1			
	18	6'-8"	8'-9"	9'-8"	8'-4"	11'-0"	12'-1"	9'-10"	12'-11"	14'-3"	11'-3"	14'-8"	16'-3"	12'-8"	16'-5"	18'-4"			
	End/Int bearing_SPF Plate (in)	2.6/6.5	2.3/5.7	1.9/4.7	3.3/8.1	2.9/7.1	2.4/5.8	3.8/9.5	3.4/8.3	2.8/6.9	4.4/10.8	3.8/9.4	3.2/7.8	4.9/12.2	4.2/10.5	3.5/8.8			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.7/4.1	1.5/3.6	1.5/3.5	2/4.8	1.7/4.2	1.5/3.5	2.2/5.5	1.9/4.8	1.6/4	2.5/6.2	2.2/5.3	1.8/4.5			
	20	6'-2"	8'-6"	9'-4"	7'-8"	10'-7"	11'-8"	9'-1"	12'-4"	13'-9"	10'-4"	14'-0"	15'-9"	11'-8"	15'-7"	17'-8"			
	End/Int bearing_SPF Plate (in)	2.7/6.6	2.5/6.1	2/5	3.3/8.2	3/7.5	2.5/6.3	3.9/9.7	3.5/8.8	3/7.4	4.5/11.1	4/10	3.4/8.4	5/12.5	4.5/11.1	3.8/9.4			
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.7/4.2	1.6/3.8	1.5/3.5	2/4.9	1.8/4.5	1.5/3.7	2.3/5.6	2/5	1.7/4.3	2.6/6.3	2.3/5.6	1.9/4.8			

- NOTES:**
- This table has been established using a Live Load deflection equal to L / 360 and a Total Load deflection limit equal to L / 240.
 - This table assumes uniform loads and simple floor joists spans. When the floor joists are continuous over the VERSA-LAM® LVL beam, multiply the tributary width by 1.25 and always select the value closer to the higher tributary width.
Example : Tributary width of 14 feet multiply by 1.25 = 17'-6".
Hence, select 18 feet for new tributary width.
 - Table values assume that lateral support is provided at each support and continuously along the compression edge of the beam.
 - Table values are based on SPF specified compression strength perpendicular to grain for plate of 769 psi.
 - Minimum bearing lengths required are based on a minimum bearing width equal to or greater than the width of the supported beam.
 - Table values represent the most restrictive of simple or continuous span beam applications. Span is measured center to center of the supports.
 - Analyze continuous span beams with BC CALC® software if the length of any span is less than half the length of the adjacent span.
 - Table values assume an interior wall dead load of 80 plf.
 - Multi-ply members may be substituted with solid section beams.

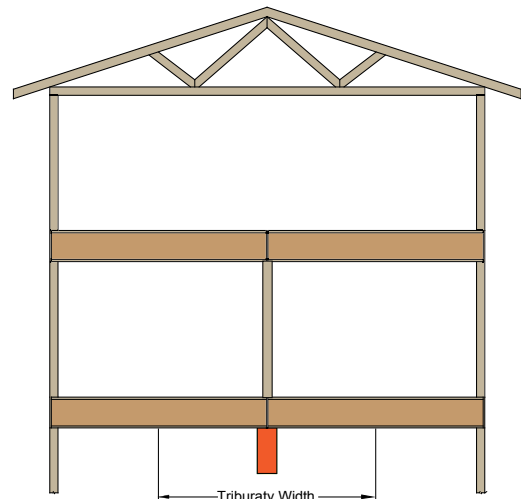

VERSA-LAM® 2800Fb 2.0E (1¾")

Live Load of 40 psf

Dead Load of 15 psf

L/480

Beam Depth		9.5"			11.875"			14"			16"			18"		
		2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply
Tributary Width [ft]	6	10' - 5"	12' - 0"	13' - 2"	13' - 1"	15' - 0"	16' - 6"	15' - 5"	17' - 8"	19' - 5"	17' - 8"	20' - 2"	22' - 3"	19' - 10"	22' - 9"	25' - 0"
	End/Int bearing_SPF Plate (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.7	1.5/3.5	1.5/3.5	1.7/4.3	1.5/3.5	1.5/3.5	2/4.9	1.5/3.8	1.5/3.5	2.2/5.5	1.7/4.2	1.5/3.5
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5
	8	9' - 6"	10' - 11"	12' - 0"	11' - 11"	13' - 7"	15' - 0"	14' - 0"	16' - 1"	17' - 8"	16' - 0"	18' - 4"	20' - 2"	18' - 0"	20' - 8"	22' - 9"
	End/Int bearing_SPF Plate (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.8/4.4	1.5/3.5	1.5/3.5	2.1/5.2	1.6/4	1.5/3.5	2.4/5.9	1.8/4.5	1.5/3.8	2.7/6.7	2.1/5.1	1.7/4.2
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5
	10	8' - 10"	10' - 1"	11' - 1"	11' - 0"	12' - 8"	13' - 11"	13' - 0"	14' - 11"	16' - 5"	14' - 10"	17' - 0"	18' - 9"	16' - 9"	19' - 2"	21' - 1"
	End/Int bearing_SPF Plate (in)	1.7/4.1	1.5/3.5	1.5/3.5	2.1/5.1	1.6/3.9	1.5/3.5	2.4/6	1.9/4.6	1.6/3.8	2.8/6.9	2.1/5.3	1.8/4.3	3.1/7.7	2.4/5.9	2/4.9
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.6/3.9	1.5/3.5
	12	8' - 4"	9' - 6"	10' - 5"	10' - 5"	11' - 11"	13' - 1"	12' - 3"	14' - 0"	15' - 5"	14' - 0"	16' - 0"	17' - 8"	15' - 9"	18' - 0"	19' - 10"
	End/Int bearing_SPF Plate (in)	1.9/4.6	1.5/3.5	1.5/3.5	2.3/5.8	1.8/4.4	1.5/3.7	2.7/6.8	2.1/5.2	1.7/4.3	3.1/7.8	2.4/5.9	2/4.9	3.5/8.7	2.7/6.7	2.2/5.5
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.6/3.9	1.5/3.5	1.5/3.5	1.5/3.5	1.8/4.4	1.5/3.5
	14	7' - 10"	9' - 0"	9' - 11"	9' - 10"	11' - 3"	12' - 5"	11' - 7"	13' - 4"	14' - 8"	13' - 3"	15' - 3"	16' - 9"	14' - 11"	17' - 2"	18' - 10"
	End/Int bearing_SPF Plate (in)	2.1/5.1	1.6/3.9	1.5/3.5	2.6/6.4	2/4.9	1.6/4	3/7.5	2.3/5.7	1.9/4.8	3.5/8.6	2.7/6.6	2.2/5.4	3.9/9.7	3/7.4	2.5/6.1
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.6/3.8	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.7	1.5/3.5
	16	7' - 6"	8' - 7"	9' - 6"	9' - 5"	10' - 10"	11' - 11"	11' - 1"	12' - 9"	14' - 0"	12' - 9"	14' - 7"	16' - 0"	14' - 4"	16' - 5"	18' - 0"
	End/Int bearing_SPF Plate (in)	2.3/5.6	1.7/4.3	1.5/3.5	2.8/7	2.2/5.3	1.8/4.4	3.3/8.2	2.5/6.3	2.1/5.2	3.8/9.4	2.9/7.2	2.4/5.9	4.2/10.5	3.3/8.1	2.7/6.7
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.7/4.2	1.5/3.5	1.5/3.5	1.9/4.8	1.5/3.6	1.5/3.5	2.2/5.3	1.7/4.1	1.5/3.5
	18	7' - 3"	8' - 4"	9' - 2"	9' - 1"	10' - 5"	11' - 5"	10' - 8"	12' - 3"	13' - 6"	12' - 3"	14' - 0"	15' - 5"	13' - 9"	15' - 9"	17' - 4"
	End/Int bearing_SPF Plate (in)	2.4/6	1.9/4.6	1.6/3.8	3/7.5	2.3/5.8	1.9/4.8	3.6/8.9	2.7/6.8	2.3/5.6	4.1/10.1	3.1/7.8	2.6/6.4	4.6/11.4	3.5/8.7	2.9/7.2
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.6/3.8	1.5/3.5	1.5/3.5	1.8/4.5	1.5/3.5	1.5/3.5	2.1/5.1	1.6/3.9	1.5/3.5	2.3/5.8	1.8/4.4	1.5/3.7	
20	6' - 11"	8' - 0"	8' - 10"	8' - 8"	10' - 0"	11' - 0"	10' - 2"	11' - 10"	13' - 0"	11' - 8"	13' - 6"	14' - 10"	13' - 1"	15' - 2"	16' - 9"	
End/Int bearing_SPF Plate (in)	2.6/6.4	2/5	1.7/4.1	3.2/8	2.5/6.2	2.1/5.1	3.8/9.4	2.9/7.3	2.4/6	4.3/10.7	3.4/8.3	2.8/6.9	4.9/12.1	3.8/9.3	3.1/7.7	
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.6/4	1.5/3.5	1.5/3.5	1.9/4.8	1.5/3.7	1.5/3.5	2.2/5.4	1.7/4.2	1.5/3.5	2.5/6.1	1.9/4.7	1.6/3.9	

Live Load of 40 psf


Dead Load of 25 psf

L/480

Beam Depth		9.5"			11.875"			14"			16"			18"		
		2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply
Tributary Width [ft]	6	10' - 5"	12' - 0"	13' - 2"	13' - 1"	15' - 0"	16' - 6"	15' - 5"	17' - 8"	19' - 5"	17' - 8"	20' - 2"	22' - 3"	19' - 10"	22' - 9"	25' - 0"
	End/Int bearing_SPF Plate (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.7/4.2	1.5/3.5	1.5/3.5	2/5	1.6/3.8	1.5/3.5	2.3/5.7	1.8/4.3	1.5/3.6	2.6/6.4	2/4.9	1.6/4
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5
	8	9' - 6"	10' - 11"	12' - 0"	11' - 11"	13' - 7"	15' - 0"	14' - 0"	16' - 1"	17' - 8"	16' - 0"	18' - 4"	20' - 2"	18' - 0"	20' - 8"	22' - 9"
	End/Int bearing_SPF Plate (in)	1.7/4.1	1.5/3.5	1.5/3.5	2.1/5.1	1.6/3.9	1.5/3.5	2.4/6	1.9/4.6	1.6/3.8	2.8/6.9	2.1/5.2	1.8/4.3	3.1/7.7	2.4/5.9	2/4.9
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.6/3.9	1.5/3.5
	10	8' - 10"	10' - 1"	11' - 1"	11' - 0"	12' - 8"	13' - 11"	13' - 0"	14' - 11"	16' - 5"	14' - 10"	17' - 0"	18' - 9"	16' - 9"	19' - 2"	21' - 1"
	End/Int bearing_SPF Plate (in)	1.9/4.7	1.5/3.6	1.5/3.5	2.4/5.9	1.8/4.5	1.5/3.7	2.8/7	2.2/5.3	1.8/4.4	3.2/8	2.5/6.1	2/5	3.6/8.9	2.8/6.8	2.3/5.7
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.6/4	1.5/3.5	1.5/3.5	1.5/3.5	1.8/4.5	1.5/3.5
	12	8' - 4"	9' - 6"	10' - 5"	10' - 5"	11' - 11"	13' - 1"	12' - 3"	14' - 0"	15' - 5"	14' - 0"	16' - 0"	17' - 8"	15' - 9"	18' - 0"	19' - 10"
	End/Int bearing_SPF Plate (in)	2.2/5.3	1.7/4.1	1.5/3.5	2.7/6.7	2.1/5.1	1.7/4.2	3.2/7.9	2.4/6	2/5	3.6/9	2.8/6.9	2.3/5.7	4.1/10.1	3.1/7.7	2.6/6.4
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.6/4	1.5/3.5	1.5/3.5	1.9/4.6	1.5/3.5	1.5/3.5	2.1/5.1	1.6/3.9	1.5/3.5
	14	7' - 10"	9' - 0"	9' - 11"	9' - 10"	11' - 3"	12' - 5"	11' - 7"	13' - 4"	14' - 8"	13' - 3"	15' - 3"	16' - 9"	14' - 11"	17' - 2"	18' - 10"
	End/Int bearing_SPF Plate (in)	2.4/5.9	1.8/4.5	1.5/3.7	3/7.4	2.3/5.7	1.9/4.7	3.5/8.7	2.7/6.7	2.2/5.5	4/9.9	3.1/7.6	2.5/6.3	4.5/11.2	3.4/8.5	2.9/7.1
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.8	1.5/3.5	1.5/3.5	1.8/4.4	1.5/3.5	1.5/3.5	2/5	1.6/3.9	1.5/3.5	2.3/5.7	1.8/4.3	1.5/3.6
	16	7' - 4"	8' - 7"	9' - 6"	9' - 2"	10' - 10"	11' - 11"	10' - 10"	12' - 3"	13' - 6"	12' - 4"	14' - 7"	16' - 0"	13' - 11"	16' - 5"	18' - 0"
	End/Int bearing_SPF Plate (in)	2.6/6.3	2/4.9	1.7/4.1	3.2/7.9	2.5/6.2	2.1/5.1	3.7/9.2	2.9/7.3	2.4/6	4.3/10.6	3.4/8.3	2.8/6.9	4.8/11.9	3.8/9.3	3.1/7.7
	End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.6/4	1.5/3.5	1.5/3.5	1.9/4.7	1.5/3.7	1.5/3.5	2.2/5.3	1.7/4.2	1.5/3.5	2.4/6	1.9/4.7	1.6/3.9
	18	6' - 8"	8' - 4"	9' - 2"	8' - 4"	10' - 5"	11' - 5"	9' - 10"	12' - 3"	13' - 6"	11' - 3"	14' - 0"	15' - 5"	12' - 8"	15' - 9"	17' - 4"
	End/Int bearing_SPF Plate (in)	2.6/6.5	2.2/5.3	1.8/4.4	3.3/8.1	2.7/6.7	2.2/5.5	3.8/9.5	3.2/7.9	2.6/6.5	4.4/10.8	3.6/9	3/7.4	4.9/12.2	4.1/10.1	3.4/8.3
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.7/4.1	1.5/3.5	1.5/3.5	2/4.8	1.6/4	1.5/3.5	2.2/5.5	1.9/4.6	1.5/3.8	2.5/6.2	2.1/5.1	1.7/4.2	
20	6' - 2"	8' - 0"	8' - 10"	7' - 8"	10' - 0"	11' - 0"	9' - 1"	11' - 10"	13' - 0"	10' - 4"	13' - 6"	14' - 10"	11' - 8"	15' - 2"	16' - 9"	
End/Int bearing_SPF Plate (in)	2.7/6.6	2.3/5.7	1.9/4.7	3.3/8.2	2.9/7.2	2.4/5.9	3.9/9.7	3.4/8.4	2.8/7	4.5/11.1	3.9/9.6	3.2/8	5/12.5	4.4/10.8	3.6/8.9	
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.7/4.2	1.5/3.6	1.5/3.5	2/4.9	1.7/4.3	1.5/3.5	2.3/5.6	2/4.9	1.6/4	2.6/6.4	2.2/5.5	1.8/4.5	

NOTES:

- This table has been established using a Live Load deflection equal to L / 480 and a Total Load deflection limit equal to L / 240.
- This table assumes uniform loads and simple floor joists spans. When the floor joists are continuous over the VERSA-LAM® LVL beam, multiply the tributary width by 1.25 and always select the value closer to the higher tributary width.
Example : Tributary width of 14 feet multiply by 1.25 = 17'-6".
Hence, select 18 feet for new tributary width.
- Table values assume that lateral support is provided at each support and continuously along the compression edge of the beam.
- Table values are based on SPF specified compression strength perpendicular to grain for plate of 769 psi.
- Minimum bearing lengths required are based on a minimum bearing width equal to or greater than the width of the supported beam.
- Table values represent the most restrictive of simple or continuous span beam applications. Span is measured center to center of the supports.
- Analyze continuous span beams with BC CALC® software if the length of any span is less than half the length of the adjacent span.
- Table values assume an interior wall dead load of 80 plf.
- Multi-ply members may be substituted with solid section beams.

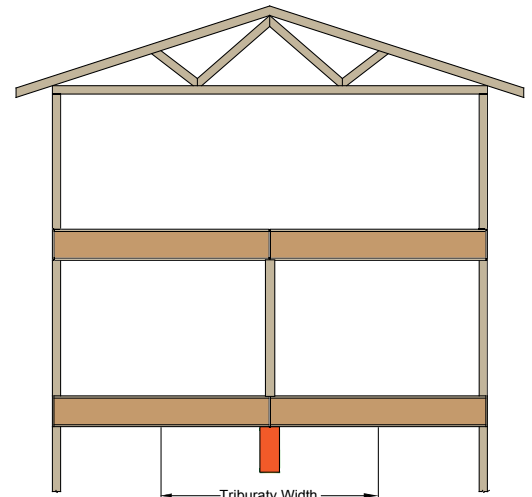

RIDGE BEAM SPAN TABLES

VERSA-LAM® 2800Fb 2.0E (1¾")

Snow Load of 20 psf

Dead Load of 15 psf

L/240

Beam Depth	9.5"			11.875"			14"			16"			18"		
	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply
20	15'-2"	17'-4"	19'-0"	18'-11"	21'-7"	23'-8"	22'-4"	25'-5"	27'-10"	25'-6"	29'-0"	31'-9"	28'-7"	32'-7"	35'-7"
End/Int bearing_SPF Plate (in)	1.8/4.4	1.5/3.5	1.5/3.5	2.2/5.4	1.7/4.1	1.5/3.5	2.6/6.4	2/4.9	1.6/4	2.9/7.3	2.2/5.5	1.8/4.5	3.3/8.2	2.5/6.2	2.1/5.1
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5
24	14'-4"	16'-4"	17'-11"	17'-10"	20'-4"	22'-4"	21'-0"	24'-0"	26'-3"	24'-0"	27'-4"	30'-0"	27'-0"	30'-9"	33'-8"
End/Int bearing_SPF Plate (in)	2/4.9	1.5/3.8	1.5/3.5	2.5/6.1	1.9/4.7	1.6/3.9	2.9/7.2	2.2/5.5	1.8/4.5	3.3/8.2	2.5/6.3	2.1/5.1	3.7/9.2	2.8/7	2.3/5.8
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5
28	13'-7"	15'-6"	17'-1"	17'-0"	19'-4"	21'-3"	20'-0"	22'-10"	25'-0"	22'-10"	26'-0"	28'-7"	25'-8"	29'-3"	32'-1"
End/Int bearing_SPF Plate (in)	2.2/5.5	1.7/4.2	1.5/3.5	2.7/6.8	2.1/5.2	1.7/4.3	3.2/8	2.5/6.1	2/5	3.7/9.1	2.8/6.9	2.3/5.7	4.1/10.2	3.1/7.8	2.6/6.4
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.7/4.1	1.5/3.5	1.5/3.5	1.9/4.6	1.5/3.5	1.5/3.5	2.1/5.2	1.6/4	1.5/3.5
32	13'-0"	14'-10"	16'-4"	16'-3"	18'-7"	20'-4"	19'-2"	21'-10"	24'-0"	21'-10"	24'-11"	27'-4"	24'-7"	28'-0"	30'-9"
End/Int bearing_SPF Plate (in)	2.4/6	1.8/4.5	1.5/3.8	3/7.4	2.3/5.7	1.9/4.7	3.5/8.7	2.7/6.7	2.2/5.5	4/10	3.1/7.6	2.5/6.3	4.5/11.2	3.4/8.5	2.8/7
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.8	1.5/3.5	1.5/3.5	1.8/4.4	1.5/3.5	1.5/3.5	2.1/5.1	1.6/3.9	1.5/3.5	2.3/5.7	1.8/4.3	1.5/3.6
36	12'-6"	14'-4"	15'-8"	15'-7"	17'-10"	19'-7"	18'-5"	21'-0"	23'-1"	21'-0"	24'-0"	26'-4"	23'-8"	27'-0"	29'-7"
End/Int bearing_SPF Plate (in)	2.6/6.4	2/4.9	1.7/4.1	3.2/8	2.5/6.1	2.1/5.1	3.8/9.5	2.9/7.2	2.4/5.9	4.3/10.8	3.3/8.2	2.7/6.8	4.9/12.1	3.7/9.2	3.1/7.6
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.7/4.1	1.5/3.5	1.5/3.5	1.9/4.8	1.5/3.7	1.5/3.5	2.2/5.5	1.7/4.2	1.5/3.5	2.5/6.1	1.9/4.7	1.6/3.9
40	12'-1"	13'-10"	15'-2"	15'-1"	17'-3"	18'-11"	17'-9"	20'-4"	22'-4"	20'-4"	23'-2"	25'-6"	22'-10"	26'-1"	28'-7"
End/Int bearing_SPF Plate (in)	2.8/6.9	2.1/5.3	1.8/4.4	3.5/8.6	2.7/6.6	2.2/5.4	4.1/10.1	3.1/7.7	2.6/6.4	4.7/11.6	3.6/8.8	2.9/7.3	5.2/13	4/9.9	3.3/8.2
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.8/4.4	1.5/3.5	1.5/3.5	2.1/5.1	1.6/3.9	1.5/3.5	2.4/5.9	1.8/4.5	1.5/3.7	2.7/6.6	2/5	1.7/4.1

Snow Load of 40 psf

Dead Load of 15 psf

L/240

Beam Depth	9.5"			11.875"			14"			16"			18"		
	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply
20	13'-4"	15'-3"	16'-9"	16'-8"	19'-0"	20'-10"	19'-7"	22'-5"	24'-7"	22'-5"	25'-7"	28'-0"	25'-2"	28'-8"	31'-6"
End/Int bearing_SPF Plate (in)	2.5/6.2	1.9/4.7	1.6/3.9	3.1/7.7	2.4/5.9	2/4.8	3.6/9	2.8/6.9	2.3/5.7	4.2/10.3	3.2/7.9	2.6/6.5	4.7/11.6	3.6/8.8	2.9/7.3
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.6/3.9	1.5/3.5	1.5/3.5	1.9/4.6	1.5/3.5	1.5/3.5	2.1/5.2	1.6/4	1.5/3.5	2.4/5.9	1.8/4.5	1.5/3.7
24	12'-7"	14'-4"	15'-9"	15'-8"	17'-11"	19'-8"	18'-6"	21'-1"	23'-2"	21'-1"	24'-1"	26'-5"	23'-9"	27'-1"	29'-8"
End/Int bearing_SPF Plate (in)	2.8/7	2.2/5.3	1.8/4.4	3.5/8.7	2.7/6.6	2.2/5.5	4.1/10.2	3.1/7.8	2.6/6.4	4.7/11.7	3.6/8.9	3/7.3	5.3/13.1	4/10	3.3/8.2
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.8/4.4	1.5/3.5	1.5/3.5	2.1/5.2	1.6/3.9	1.5/3.5	2.4/5.9	1.8/4.5	1.5/3.7	2.7/6.6	2.1/5.1	1.7/4.2
28	11'-11"	13'-8"	15'-0"	14'-11"	17'-0"	18'-8"	17'-7"	20'-1"	22'-0"	20'-0"	22'-11"	25'-2"	22'-4"	25'-9"	28'-3"
End/Int bearing_SPF Plate (in)	3.1/7.7	2.4/5.9	2/4.9	3.9/9.6	3/7.3	2.5/6.1	4.6/11.3	3.5/8.6	2.9/7.1	5.2/12.9	4/9.8	3.3/8.1	5.8/14.4	4.5/11.1	3.7/9.1
End/Int bearing_Member (in)	1.6/3.9	1.5/3.5	1.5/3.5	2/4.9	1.5/3.7	1.5/3.5	2.3/5.7	1.8/4.4	1.5/3.6	2.6/6.5	2/5	1.7/4.1	2.9/7.3	2.3/5.6	1.9/4.6
32	11'-5"	13'-1"	14'-4"	14'-2"	16'-4"	17'-11"	16'-6"	19'-2"	21'-1"	18'-9"	21'-11"	24'-11"	20'-11"	24'-8"	27'-1"
End/Int bearing_SPF Plate (in)	3.4/8.4	2.6/6.4	2.2/5.3	4.2/10.4	3.2/8	2.7/6.6	4.9/12.2	3.8/9.4	3.1/7.8	5.5/13.8	4.3/10.8	3.6/8.9	6.2/15.4	4.9/12.1	4/10
End/Int bearing_Member (in)	1.7/4.3	1.5/3.5	1.5/3.5	2.1/5.3	1.7/4.1	1.5/3.5	2.5/6.2	1.9/4.8	1.6/3.9	2.8/7	2.2/5.5	1.8/4.5	3.1/7.8	2.5/6.1	2.1/5.1
36	10'-10"	12'-7"	13'-10"	13'-4"	15'-8"	17'-3"	15'-7"	18'-6"	20'-4"	17'-8"	21'-1"	23'-2"	19'-9"	23'-9"	26'-1"
End/Int bearing_SPF Plate (in)	3.6/9	2.8/7	2.3/5.7	4.5/11.1	3.5/8.7	2.9/7.2	5.2/12.9	4.1/10.2	3.4/8.4	5.9/14.6	4.7/11.7	3.9/9.6	6.6/16.3	5.3/13.1	4.3/10.8
End/Int bearing_Member (in)	1.9/4.6	1.5/3.5	1.5/3.5	2.3/5.6	1.8/4.4	1.5/3.6	2.6/6.5	2.1/5.2	1.7/4.3	3/7.4	2.4/5.9	2/4.9	3.3/8.3	2.7/6.6	2.2/5.5
40	10'-3"	12'-1"	13'-4"	12'-8"	15'-2"	16'-8"	14'-10"	17'-10"	19'-7"	16'-9"	20'-5"	22'-5"	18'-9"	22'-11"	25'-2"
End/Int bearing_SPF Plate (in)	3.8/9.5	3/7.5	2.5/6.2	4.7/11.7	3.8/9.3	3.1/7.7	5.5/13.6	4.4/11	3.6/9	6.2/15.4	5/12.5	4.2/10.3	6.9/17.2	5.6/14	4.7/11.6
End/Int bearing_Member (in)	2/4.8	1.5/3.8	1.5/3.5	2.4/5.9	1.9/4.7	1.6/3.9	2.8/6.9	2.2/5.5	1.9/4.6	3.2/7.8	2.6/6.3	2.1/5.2	3.5/8.7	2.9/7.1	2.4/5.9

Snow Load of 60 psf

Dead Load of 15 psf

L/240

Beam Depth	9.5"			11.875"			14"			16"			18"		
	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply
20	12'-2"	13'-10"	15'-3"	15'-2"	17'-4"	19'-0"	17'-10"	20'-5"	22'-5"	20'-5"	23'-4"	25'-7"	22'-9"	26'-2"	28'-9"
End/Int bearing_SPF Plate (in)	3.1/7.7	2.4/5.9	2/4.9	3.9/9.7	3/7.4	2.5/6.1	4.6/11.4	3.5/8.7	2.9/7.1	5.2/13	4/9.9	3.3/8.1	5.8/14.5	4.5/11.1	3.7/9.1
End/Int bearing_Member (in)	1.6/3.9	1.5/3.5	1.5/3.5	2/4.9	1.5/3.7	1.5/3.5	2.3/5.8	1.8/4.4	1.5/3.6	2.7/6.6	2/5	1.7/4.1	3/7.3	2.3/5.6	1.9/4.6
24	11'-5"	13'-1"	14'-4"	14'-1"	16'-4"	17'-11"	16'-5"	19'-3"	21'-2"	18'-8"	22'-0"	24'-1"	20'-10"	24'-8"	27'-1"
End/Int bearing_SPF Plate (in)	3.5/8.7	2.7/6.7	2.2/5.5	4.3/10.8	3.4/8.3	2.8/6.9	5/12.5	3.9/9.8	3.3/8.1	5.7/14.2	4.5/11.2	3.7/9.2	6.4/15.9	5/12.5	4.2/10.3
End/Int bearing_Member (in)	1.8/4.4	1.5/3.5	1.5/3.5	2.2/5.4	1.7/4.2	1.5/3.5	2.6/6.4	2/5	1.7/4.1	2.9/7.2	2.3/5.7	1.9/4.7	3.2/8	2.6/6.4	2.1/5.2
28	10'-7"	12'-5"	13'-8"	13'-1"	15'-6"	17'-1"	15'-3"	18'-3"	20'-1"	17'-3"	20'-11"	22'-11"	19'-4"	23'-6"	25'-9"
End/Int bearing_SPF Plate (in)	3.8/9.4	3/7.4	2.5/6.1	4.7/11.6	3.7/9.2	3.1/7.6	5.5/13.6	4.4/10.9	3.6/9	6.2/15.4	5/12.4	4.1/10.2	6.9/17.2	5.6/13.9	4.6/11.5
End/Int bearing_Member (in)	1.9/4.8	1.5/3.8	1.5/3.5	2.4/5.9	1.9/4.7	1.6/3.9	2.8/6.9	2.2/5.5	1.8/4.5	3.1/7.8	2.5/6.3	2.1/5.2	3.5/8.7	2.8/7	2.4/5.8
32	9'-11"	11'-11"	13'-1"	12'-2"	14'-10"	17'-11"	14'-3"	17'-5"	19'-3"	16'-2"	19'-9"	22'-0"	18'-1"	23'-1"	24'-8"
End/Int bearing_SPF Plate (in)	4.1/10.1	3.3/8.1	2.7/6.7	5/12.4	4.1/10.1	3.4/8.3	5.8/14.5	4.8/11.8	3.9/9.8	6.6/16.4	5.4/13.4	4.5/11.2	7.4/18.3	6/14.9	5/12.5
End/Int bearing_Member (in)	2.1/5.1	1.7/4.1	1.5/3.5	2.5/6.3	2.1/5.1	1.7/4.2	3/7.3	2.4/6	2/5	3.4/8.3	2.7/6.8	2.3/5.7	3.7/9.3	3.1/7.6	2.6/6.4
36	9'-4"	11'-5"	12'-7"	11'-6"	14'-1"	15'-8"	13'-5"	16'-5"	18'-6"	15'-3"	18'-8"	21'-2"	17'-0"	20'-10"	23'-9"
End/Int bearing_SPF Plate (in)	4.3/10.7	3.5/8.7	2.9/7.2	5.3/13.2	4.3/10.8	3.6/9	6.2/15.4	5/12.5	4.3/10.6	7/17.4	5.7/14.2	4.9/12.1	7.8/19.5	6.4/15.9	5.5/13.6
End/Int bearing_Member (in)	2.2/5.4	1.8/4.4	1.5/3.7	2.7/6.7	2.2/5.4	1.9/4.6	3.1/7.8	2.6/6.4	2.2/5.4	3.6/8.8	2.9/7.2	2.5/6.1	4/9.8	3.2/8	2.8/6.9
40	8'-10"	10'-10"	12'-2"	10'-11"	13'-4"	15'-2"	12'-9"	15'-7"	17'-10"	14'-6"	17'-8"	20'-5"	16'-2"	19'-9"	22'-9"
End/Int bearing_SPF Plate (in)	4.5/11.3	3.7/9.2	3.1/7.7	5.6/13.9	4.6/11.3	3.9/9.7	6.5/16.2	5.3/13.2	4.6/11.4	7.4/18.4	6/15	5.2/13	8.2/20.5	6.7/16.7	5.8/14.5
End/Int bearing_Member (in)	2.3/5.7	1.9/4.7	1.6/3.9	2.8/7	2.3/5.7	2/4.9	3.3/8.2	2.7/6.7	2.3/5.8	3.7/9.3	3.1/7.6	2.7/6.6	4.2/10.4	3.4/8.5	3/7.3

NOTES:

- This table has been established using a Live Load deflection equal to L / 240 and a Total Load deflection limit equal to L / 180.
- This table assumes a maximum roof slope of 12/12
- This table assumes uniform loads and simple span roof joists.
- Table values assume that lateral support is provided at each support and continuously along the compression edge of the beam.
- Table values are based on SPF specified compression strength perpendicular to grain for plate of 769 psi.
- Minimum bearing lengths required are based on a minimum bearing width equal to or greater than the width of the supported beam.
- Table values represent the most restrictive of simple or continuous span beam applications. Span is measured center to center of the supports.
- Analyze continuous span beams with BC CALC® software if the length of any span is less than half the length of the

RIDGE BEAM SPAN TABLES CON'T

VERSA-LAM® 2800Fb 2.0E (1¾")

Snow Load of 20 psf

Dead Load of 25 psf

L/360

Beam Depth	9.5"			11.875"			14"			16"			18"		
	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply
20	12' - 6"	14' - 3"	15' - 8"	15' - 7"	17' - 10"	19' - 7"	18' - 5"	21' - 0"	23' - 0"	21' - 0"	24' - 0"	26' - 3"	23' - 8"	26' - 11"	29' - 6"
End/Int bearing_SPF Plate (in)	1.8/4.5	1.5/3.5	1.5/3.5	2.3/5.6	1.7/4.3	1.5/3.5	2.7/6.6	2/5	1.7/4.2	3/7.5	2.3/5.7	1.9/4.7	3.4/8.5	2.6/6.4	2.2/5.3
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.6/3.8	1.5/3.5	1.5/3.5	1.6/3.8	1.7/4.3	1.5/3.5	1.5/3.5
24	11' - 9"	13' - 6"	14' - 9"	14' - 9"	16' - 10"	18' - 5"	17' - 4"	19' - 10"	21' - 9"	19' - 10"	22' - 7"	24' - 10"	22' - 3"	25' - 5"	27' - 10"
End/Int bearing_SPF Plate (in)	2.1/5.1	1.6/3.9	1.5/3.5	2.6/6.4	2/4.8	1.6/4	3/7.5	2.3/5.7	1.9/4.7	3.4/8.5	2.6/6.5	2.2/5.4	3.9/9.6	2.9/7.3	2.4/6
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.8	1.5/3.5	1.5/3.5	1.8/4.3	1.5/3.5	1.5/3.5	2/4.9	1.5/3.7	1.5/3.5
28	11' - 2"	12' - 10"	14' - 1"	14' - 0"	16' - 0"	17' - 7"	16' - 6"	18' - 10"	20' - 8"	18' - 10"	21' - 6"	23' - 7"	21' - 2"	24' - 2"	26' - 6"
End/Int bearing_SPF Plate (in)	2.3/5.6	1.8/4.3	1.5/3.6	2.8/7	2.2/5.4	1.8/4.4	3.3/8.3	2.6/6.3	2.1/5.2	3.8/9.4	2.9/7.2	2.4/5.9	4.3/10.6	3.3/8.1	2.7/6.7
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.5/3.6	1.5/3.5	1.5/3.5	1.7/4.2	1.5/3.5	1.5/3.5	1.9/4.8	1.5/3.7	1.5/3.5	2.2/5.4	1.7/4.1	1.5/3.5
32	10' - 9"	12' - 3"	13' - 6"	13' - 5"	15' - 4"	16' - 10"	15' - 9"	18' - 0"	19' - 10"	18' - 0"	20' - 7"	22' - 7"	20' - 3"	23' - 2"	25' - 5"
End/Int bearing_SPF Plate (in)	2.5/6.2	1.9/4.7	1.6/3.9	3.1/7.7	2.4/5.9	2/4.8	3.7/9.1	2.8/6.9	2.3/5.7	4.2/10.3	3.2/7.9	2.6/6.5	4.7/11.6	3.6/8.8	2.9/7.3
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.6/3.9	1.5/3.5	1.5/3.5	1.9/4.6	1.5/3.5	1.5/3.5	2.1/5.2	1.6/4	1.5/3.5	2.4/5.9	1.8/4.5	1.5/3.7
36	10' - 4"	11' - 9"	12' - 11"	12' - 11"	14' - 9"	15' - 2"	15' - 2"	17' - 4"	19' - 1"	17' - 4"	19' - 10"	21' - 9"	19' - 9"	19' - 6"	24' - 5"
End/Int bearing_SPF Plate (in)	2.7/6.7	2.1/5.1	1.7/4.2	3.4/8.3	2.6/6.4	2.1/5.2	3.9/9.8	3/7.5	2.5/6.2	4.5/11.2	3.4/8.5	2.8/7	5.1/12.6	3.9/9.6	3.2/7.9
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.7/4.2	1.5/3.5	1.5/3.5	2/5	1.5/3.8	1.5/3.5	2.3/5.7	1.8/4.3	1.5/3.6	2.6/6.4	2/4.9	1.6/4
40	9' - 11"	11' - 5"	12' - 6"	12' - 5"	14' - 3"	15' - 7"	14' - 8"	16' - 9"	18' - 5"	16' - 9"	19' - 2"	21' - 0"	18' - 10"	21' - 6"	23' - 8"
End/Int bearing_SPF Plate (in)	2.9/7.2	2.2/5.5	1.8/4.5	3.6/8.9	2.8/6.8	2.3/5.6	4.2/10.5	3.2/7.8	2.7/6.6	4.8/12	3.7/9.1	3/7.5	5.4/13.5	4.1/10.3	3.4/8.5
End/Int bearing_Member (in)	1.5/3.6	1.5/3.5	1.5/3.5	1.8/4.5	1.5/3.5	1.5/3.5	2.2/5.3	1.7/4.1	1.5/3.5	2.5/6.1	1.9/4.6	1.6/3.8	2.8/6.8	2.1/5.2	1.7/4.3

Snow Load of 40 psf

Dead Load of 25 psf

L/360

Beam Depth	9.5"			11.875"			14"			16"			18"		
	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply
20	11' - 4"	12' - 11"	14' - 2"	14' - 1"	16' - 2"	17' - 9"	16' - 8"	19' - 0"	20' - 10"	19' - 0"	21' - 8"	23' - 10"	21' - 4"	24' - 5"	26' - 9"
End/Int bearing_SPF Plate (in)	2.5/6.1	1.9/4.6	1.6/3.8	3.1/7.6	2.3/5.8	1.9/4.8	3.6/8.9	2.7/6.8	2.3/5.6	4.1/10.1	3.1/7.7	2.6/6.4	4.6/11.4	3.5/8.7	2.9/7.1
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.6/3.8	1.5/3.5	1.5/3.5	1.8/4.5	1.5/3.5	1.5/3.5	2.1/5.1	1.6/3.9	1.5/3.5	2.3/5.8	1.8/4.4	1.5/3.6
24	10' - 8"	12' - 2"	13' - 4"	13' - 4"	15' - 2"	16' - 8"	15' - 8"	17' - 11"	19' - 8"	17' - 11"	20' - 5"	22' - 5"	20' - 2"	23' - 0"	25' - 3"
End/Int bearing_SPF Plate (in)	2.8/6.8	2.1/5.2	1.8/4.3	3.4/8.5	2.6/6.5	2.2/5.4	4/10	3.1/7.7	2.6/6.3	4.6/11.5	3.5/8.7	2.9/7.2	5.2/12.9	4/9.8	3.3/8.1
End/Int bearing_Member (in)	1.5/3.5	1.5/3.5	1.5/3.5	1.8/4.3	1.5/3.5	1.5/3.5	2.1/5.1	1.6/3.9	1.5/3.5	2.4/5.8	1.8/4.4	1.5/3.7	2.6/6.5	2/5	1.7/4.1
28	10' - 1"	11' - 7"	12' - 8"	12' - 8"	14' - 5"	15' - 10"	14' - 11"	17' - 0"	18' - 8"	17' - 0"	19' - 5"	21' - 4"	19' - 2"	21' - 10"	24' - 0"
End/Int bearing_SPF Plate (in)	3.1/7.6	2.3/5.8	1.9/4.8	3.8/9.5	2.9/7.2	2.4/6	4.5/11.1	3.4/8.5	2.8/7	5.1/12.7	3.9/9.7	3.2/7.8	5.7/14.3	4.4/10.9	3.6/9
End/Int bearing_Member (in)	1.6/3.8	1.5/3.5	1.5/3.5	1.9/4.8	1.5/3.7	1.5/3.5	2.3/5.6	1.8/4.3	1.5/3.6	2.6/6.4	2/4.9	1.7/4.1	2.9/7.2	2.2/5.5	1.8/4.5
32	9' - 8"	11' - 1"	12' - 2"	12' - 1"	13' - 10"	15' - 2"	14' - 3"	16' - 3"	17' - 11"	16' - 3"	18' - 7"	20' - 5"	18' - 4"	20' - 11"	23' - 0"
End/Int bearing_SPF Plate (in)	3.3/8.3	2.6/6.3	2.1/5.2	4.2/10.3	3.2/7.9	2.6/6.5	4.9/12.2	3.7/9.3	3.1/7.7	5.6/13.9	4.3/10.6	3.5/8.7	6.3/15.6	4.8/11.9	4/9.8
End/Int bearing_Member (in)	1.7/4.2	1.5/3.5	1.5/3.5	2.1/5.2	1.6/4	1.5/3.5	2.5/6.2	1.9/4.7	1.6/3.9	2.8/7	2.2/5.4	1.8/4.4	3.2/7.9	2.4/6	2/5
36	9' - 4"	10' - 8"	11' - 8"	11' - 7"	13' - 4"	14' - 7"	13' - 8"	15' - 8"	17' - 3"	15' - 8"	17' - 11"	19' - 8"	17' - 7"	20' - 2"	22' - 1"
End/Int bearing_SPF Plate (in)	3.6/9	2.8/6.8	2.3/5.6	4.5/11.2	3.4/8.5	2.8/7	5.3/13.2	4/10	3.3/8.3	6/15	4.6/11.5	3.8/9.5	6.8/16.9	5.2/12.9	4.3/10.6
End/Int bearing_Member (in)	1.8/4.5	1.5/3.5	1.5/3.5	2.3/5.7	1.8/4.3	1.5/3.6	2.7/6.7	2.1/5.1	1.7/4.2	3.1/7.6	2.4/5.8	1.9/4.8	3.4/8.5	2.6/6.5	2.2/5.4
40	9' - 0"	10' - 3"	11' - 4"	11' - 3"	12' - 10"	14' - 1"	13' - 3"	15' - 2"	16' - 8"	15' - 2"	17' - 4"	19' - 0"	17' - 0"	19' - 5"	21' - 4"
End/Int bearing_SPF Plate (in)	3.9/9.6	3/7.3	2.5/6.1	4.8/12	3.7/9.2	3.1/7.6	5.7/14.1	4.3/10.8	3.6/8.9	6.5/16.1	4.9/12.3	4.1/10.1	7.3/18.1	5.6/13.8	4.6/11.4
End/Int bearing_Member (in)	2/4.9	1.5/3.7	1.5/3.5	2.5/6.1	1.9/4.6	1.6/3.8	2.9/7.1	2.2/5.5	1.8/4.5	3.3/8.2	2.5/6.2	2.1/5.1	3.7/9.2	2.8/7	2.3/5.8

Snow Load of 60 psf

Dead Load of 25 psf

L/360

Beam Depth	9.5"			11.875"			14"			16"			18"		
	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply	2 ply	3 ply	4 ply
20	10' - 5"	11' - 11"	13' - 2"	13' - 1"	14' - 11"	16' - 5"	15' - 5"	17' - 7"	19' - 4"	17' - 7"	20' - 1"	22' - 1"	19' - 9"	22' - 7"	24' - 10"
End/Int bearing_SPF Plate (in)	3/7.4	2.3/5.7	1.9/4.7	3.7/9.3	2.9/7.1	2.4/5.8	4.4/10.9	3.4/8.3	2.8/6.9	5/12.5	3.8/9.5	3.2/7.8	5.6/14	4.3/10.7	3.5/8.8
End/Int bearing_Member (in)	1.5/3.8	1.5/3.5	1.5/3.5	1.9/4.7	1.5/3.6	1.5/3.5	2.2/5.5	1.7/4.2	1.5/3.5	2.6/6.3	2/4.8	1.6/4	2.9/7.1	2.2/5.4	1.8/4.5
24	9' - 10"	11' - 3"	12' - 4"	12' - 4"	14' - 1"	15' - 5"	14' - 6"	16' - 7"	18' - 3"	16' - 7"	18' - 11"	20' - 10"	18' - 8"	21' - 3"	23' - 5"
End/Int bearing_SPF Plate (in)	3.4/8.4	2.6/6.4	2.1/5.3	4.2/10.5	3.2/7.8	2.7/6.6	5/12.3	3.8/9.4	3.1/7.8	5.7/14.1	4.3/10.7	3.6/8.9	6.4/15.8	4.9/12.1	4/9.9
End/Int bearing_Member (in)	1.7/4.3	1.5/3.5	1.5/3.5	2.2/5.3	1.7/4.1	1.5/3.5	2.5/6.2	1.9/4.8	1.6/3.9	2.9/7.1	2.2/5.4	1.8/4.5	3.2/7.8	2.5/6.1	2/5
28	9' - 4"	10' - 8"	11' - 9"	11' - 8"	13' - 4"	14' - 8"	13' - 9"	15' - 9"	17' - 4"	15' - 9"	18' - 0"	19' - 9"	17' - 9"	20' - 3"	22' - 3"
End/Int bearing_SPF Plate (in)	3.8/9.3	2.9/7.1	2.4/5.9	4.7/11.6	3.6/8.9	3/7.3	5.5/13.7	4.2/10.4	3.5/8.6	6.3/15.6	4.8/11.9	4/9.8	7.1/17.6	5.4/13.4	4.4/11
End/Int bearing_Member (in)	1.9/4.7	1.5/3.6	1.5/3.5	2.4/5.9	1.8/4.5	1.5/3.7	2.8/6.9	2.1/5.3	1.8/4.4	3.2/7.9	2.4/6	2/5	3.6/8.9	2.7/6.8	2.3/5.6
32	8' - 11"	10' - 3"	11' - 3"	11' - 2"	12' - 9"	14' - 1"	13' - 2"	15' - 1"	16' - 7"	15' - 1"	17' - 3"	18' - 11"	16' - 10"	19' - 4"	21' - 3"
End/Int bearing_SPF Plate (in)	4.1/10.2	3.1/7.8	2.6/6.4	5.1/12.7	3.9/9.7	3.2/8	6/14.9	4.6/11.4	3.8/9.4	6.9/17.1	5.2/13	4.3/10.7	7.7/19.1	5.9/14.6	4.9/12.1
End/Int bearing_Member (in)	2.1/5.2	1.6/3.9	1.5/3.5	2.6/6.4	2/4.9	1.7/4.1	3.1/7.6	2.3/5.8	1.9/4.8	3.5/8.6	2.7/6.6	2.2/5.4	3.9/9.6	3/7.4	2.5/6.1
36	8' - 7"	9' - 10"	10' - 10"	10' - 9"	12' - 4"	13' - 6"	12' - 6"	14' - 6"	15' - 11"	14' - 3"	16' - 7"	18' - 3"	15' - 11"	18' - 8"	20' - 6"
End/Int bearing_SPF Plate (in)	4.4/11	3.4/8.4	2.8/6.9	5.5/13.7	4.2/10.5	3.5/8.6	6.4/16	5/12.3	4.1/10.2	7.3/18.1	5.7/14.1	4.7/11.6	8.1/20.2	6.4/15.8	5.3/13.1
End/Int bearing_Member (in)	2.3/5.6	1.7/4.3	1.5/3.5	2.8/6.9	2.2/5.3	1.8/4.4	3.3/8.1	2.5/6.2	2.1/5.2	3.7/9.2	2.9/7.1	2.4/5.9	4.1/10.2	3.2/8	2.7/6.6
40	8' - 1"	9' - 6"	10' - 5"	10' - 1"	11' - 10"	13' - 1"	11' - 11"	14' - 0"	15' - 5"	13' - 6"	16' - 0"	17' - 7"	15' - 1"	18' - 0"	19' - 9"
End/Int bearing_SPF Plate (in)	4.6/11.5	3.6/9	3/7.4	5.8/14.4	4.5/11.2	3.7/9.3	6.8/16.9	5.3/13.2	4.4/10.9	7.7/19.1	6.1/15.1	5/12.5	8.6/21.3	6.8/17	5.6/14
End/Int															

HEADER SPAN TABLES - ROOF ONLY

VERSA-LAM® 2800Fb 2.0E (1 3/4")

Snow Load of 20 psf

Dead Load of 15 psf

L/240

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	8' - 3"	9' - 6"	10' - 11"	12' - 6"	13' - 11"	15' - 11"	14' - 3"	16' - 4"	16' - 11"	19' - 4"	17' - 10"	20' - 4"	21' - 0"	24' - 0"	24' - 0"	27' - 4"	27' - 0"	30' - 9"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.1	1.6	2.4	1.9	2.8	2.1	3.1	2.4
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5
24	7' - 10"	9' - 0"	10' - 4"	11' - 10"	13' - 3"	15' - 1"	13' - 7"	15' - 6"	16' - 1"	18' - 4"	17' - 0"	19' - 4"	20' - 0"	22' - 10"	22' - 10"	26' - 0"	25' - 8"	29' - 3"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.9	1.5	1.9	1.5	2.2	1.7	2.4	1.8	2.8	2.1	3.2	2.4	3.5	2.7
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.5
28	7' - 6"	8' - 7"	9' - 11"	11' - 4"	12' - 8"	14' - 6"	13' - 0"	14' - 10"	15' - 5"	17' - 7"	16' - 3"	18' - 7"	19' - 2"	21' - 10"	21' - 10"	24' - 11"	24' - 7"	28' - 0"
End bearing_SPF Plate (in)	1.5	1.5	1.6	1.5	2.1	1.6	2.1	1.6	2.5	1.9	2.6	2.0	3.1	2.4	3.5	2.7	4.0	3.0
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.8	1.5	2.0	1.5
32	7' - 3"	8' - 3"	9' - 6"	10' - 11"	12' - 2"	13' - 11"	12' - 6"	14' - 4"	14' - 10"	16' - 11"	15' - 7"	17' - 10"	18' - 5"	21' - 0"	21' - 0"	24' - 0"	23' - 8"	27' - 0"
End bearing_SPF Plate (in)	1.5	1.5	1.8	1.5	2.3	1.7	2.3	1.8	2.7	2.1	2.9	2.2	3.4	2.6	3.9	3.0	4.3	3.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	2.0	1.5	2.2	1.7
36	7' - 0"	8' - 0"	9' - 3"	10' - 6"	11' - 9"	13' - 5"	12' - 1"	13' - 10"	14' - 4"	16' - 4"	15' - 1"	17' - 3"	17' - 9"	20' - 4"	20' - 4"	23' - 2"	22' - 10"	26' - 1"
End bearing_SPF Plate (in)	1.5	1.5	1.9	1.5	2.5	1.9	2.5	1.9	3.0	2.3	3.1	2.4	3.7	2.8	4.2	3.2	4.7	3.6
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.9	1.5	2.1	1.6	2.4	1.8
40	6' - 9"	7' - 9"	8' - 11"	10' - 3"	11' - 5"	13' - 0"	11' - 8"	13' - 5"	13' - 10"	15' - 10"	14' - 7"	16' - 9"	17' - 3"	19' - 8"	19' - 8"	22' - 6"	22' - 1"	25' - 3"
End bearing_SPF Plate (in)	1.6	1.5	2.1	1.6	2.6	2.0	2.7	2.1	3.2	2.4	3.4	2.6	4.0	3.0	4.5	3.5	5.1	3.9
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.6	2.3	1.8	2.6	2.0

Snow Load of 40 psf

Dead Load of 15 psf

L/240

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	7' - 3"	8' - 4"	9' - 7"	10' - 11"	12' - 3"	14' - 0"	12' - 7"	14' - 4"	14' - 10"	17' - 0"	15' - 8"	17' - 11"	18' - 6"	21' - 1"	21' - 1"	24' - 1"	23' - 9"	27' - 1"
End bearing_SPF Plate (in)	1.5	1.5	1.8	1.5	2.3	1.8	2.4	1.8	2.8	2.1	2.9	2.2	3.4	2.6	3.9	3.0	4.4	3.4
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	2.0	1.5	2.2	1.7
24	6' - 11"	7' - 11"	9' - 1"	10' - 5"	11' - 7"	13' - 3"	11' - 11"	13' - 8"	14' - 1"	16' - 2"	14' - 11"	17' - 0"	17' - 7"	20' - 1"	20' - 0"	22' - 11"	22' - 4"	25' - 9"
End bearing_SPF Plate (in)	1.6	1.5	2.1	1.6	2.6	2.0	2.7	2.1	3.2	2.4	3.3	2.5	3.9	3.0	4.5	3.4	5.0	3.8
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.3	1.7	2.5	2.0
28	6' - 7"	7' - 7"	8' - 8"	9' - 11"	11' - 1"	12' - 8"	11' - 5"	13' - 1"	13' - 5"	15' - 5"	14' - 2"	16' - 4"	16' - 6"	19' - 2"	18' - 9"	21' - 11"	20' - 11"	24' - 8"
End bearing_SPF Plate (in)	1.7	1.5	2.3	1.8	2.9	2.2	3.0	2.3	3.5	2.7	3.7	2.8	4.3	3.3	4.9	3.8	5.4	4.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	1.9	1.5	2.2	1.7	2.5	1.9	2.8	2.2
32	6' - 4"	7' - 3"	8' - 4"	9' - 7"	10' - 7"	12' - 3"	10' - 10"	12' - 7"	12' - 8"	14' - 10"	13' - 4"	15' - 8"	15' - 7"	18' - 6"	17' - 8"	21' - 1"	19' - 9"	23' - 9"
End bearing_SPF Plate (in)	1.9	1.5	2.5	1.9	3.1	2.4	3.2	2.5	3.8	3.0	4.0	3.1	4.6	3.7	5.2	4.2	5.8	4.7
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	1.9	1.5	2.0	1.6	2.4	1.9	2.7	2.1	3.0	2.4
36	6' - 1"	7' - 0"	7' - 11"	9' - 3"	10' - 0"	11' - 10"	10' - 3"	12' - 1"	12' - 0"	14' - 4"	12' - 8"	15' - 2"	14' - 10"	17' - 10"	16' - 9"	20' - 5"	18' - 9"	22' - 11"
End bearing_SPF Plate (in)	2.1	1.6	2.7	2.1	3.4	2.6	3.4	2.7	4.0	3.2	4.2	3.4	4.9	4.0	5.6	4.5	6.2	5.1
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.7	1.5	1.8	1.5	2.1	1.6	2.2	1.7	2.5	2.0	2.8	2.3	3.2	2.6
40	5' - 10"	6' - 9"	7' - 7"	8' - 11"	9' - 6"	11' - 5"	9' - 9"	11' - 9"	11' - 6"	13' - 11"	12' - 1"	14' - 8"	14' - 1"	17' - 3"	16' - 0"	19' - 7"	17' - 11"	21' - 10"
End bearing_SPF Plate (in)	2.2	1.7	2.8	2.2	3.6	2.8	3.6	2.9	4.3	3.5	4.5	3.6	5.2	4.3	5.9	4.8	6.6	5.4
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.8	1.5	1.9	1.5	2.2	1.8	2.3	1.9	2.7	2.2	3.0	2.5	3.4	2.7

Snow Load of 60 psf

Dead Load of 15 psf

L/240

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	6' - 7"	7' - 7"	8' - 9"	10' - 0"	11' - 1"	12' - 9"	11' - 5"	13' - 1"	13' - 5"	15' - 6"	14' - 1"	16' - 4"	16' - 5"	19' - 3"	18' - 8"	22' - 0"	20' - 10"	24' - 8"
End bearing_SPF Plate (in)	1.7	1.5	2.3	1.7	2.9	2.2	2.9	2.3	3.4	2.7	3.6	2.8	4.2	3.3	4.8	3.8	5.3	4.2
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	1.8	1.5	2.2	1.7	2.4	1.9	2.7	2.2
24	6' - 3"	7' - 2"	8' - 2"	9' - 6"	10' - 4"	12' - 1"	10' - 7"	12' - 5"	12' - 5"	14' - 8"	13' - 1"	15' - 6"	15' - 3"	18' - 3"	17' - 3"	20' - 11"	19' - 4"	23' - 6"
End bearing_SPF Plate (in)	2.0	1.5	2.5	2.0	3.2	2.5	3.3	2.6	3.8	3.0	4.0	3.2	4.7	3.8	5.3	4.3	5.9	4.8
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.6	2.1	1.6	2.4	1.9	2.7	2.2	3.0	2.4
28	5' - 11"	6' - 10"	7' - 8"	9' - 1"	9' - 8"	11' - 7"	9' - 11"	11' - 11"	11' - 7"	14' - 1"	12' - 2"	14' - 10"	14' - 3"	17' - 5"	16' - 2"	19' - 9"	18' - 1"	22' - 1"
End bearing_SPF Plate (in)	2.1	1.7	2.8	2.2	3.5	2.8	3.6	2.9	4.2	3.4	4.4	3.6	5.1	4.2	5.8	4.7	6.5	5.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.8	1.5	1.8	1.5	2.1	1.7	2.2	1.8	2.6	2.1	2.9	2.4	3.3	2.7
32	5' - 7"	6' - 7"	7' - 3"	8' - 9"	9' - 1"	11' - 1"	9' - 4"	11' - 5"	10' - 11"	13' - 5"	11' - 6"	14' - 1"	13' - 5"	16' - 5"	15' - 3"	18' - 8"	17' - 0"	20' - 10"
End bearing_SPF Plate (in)	2.3	1.8	3.0	2.4	3.7	3.1	3.8	3.1	4.5	3.7	4.7	3.9	5.5	4.5	6.2	5.1	7.0	5.7
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.9	1.6	2.0	1.6	2.3	1.9	2.4	2.0	2.8	2.3	3.2	2.6	3.5	2.9
36	5' - 3"	6' - 5"	6' - 10"	8' - 5"	8' - 7"	10' - 7"	8' - 10"	10' - 10"	10' - 5"	12' - 8"	10' - 11"	13' - 4"	12' - 9"	15' - 7"	14' - 6"	17' - 8"	16' - 2"	19' - 9"
End bearing_SPF Plate (in)	2.5	2.0	3.2	2.6	4.0	3.3	4.1	3.3	4.8	3.9	5.0	4.1	5.9	4.8	6.6	5.4	7.4	6.1
End bearing_Member (in)	1.5	1.5	1.6	1.5	2.0	1.7	2.1	1.7	2.4	2.0	2.6	2.1	3.0	2.4	3.4	2.8	3.8	3.1
40	5' - 0"	6' - 2"	6' - 6"	8' - 0"	8' - 3"	10' - 1"	8' - 5"	10' - 4"	9' - 11"	12' - 1"	10' - 5"	12' - 9"	12' - 2"	14' - 11"	13' - 10"	16' - 11"	15' - 5"	18' - 10"
End bearing_SPF Plate (in)	2.6	2.1	3.4	2.8	4.2	3.5	4.3	3.5	5.1	4.1	5.3	4.4	6.2	5.1	7.0	5.8	7.9	6.4
End bearing_Member (in)	1.5	1.5	1.7	1.5	2.2	1.8	2.2	1.8	2.6	2.1	2.7	2.2	3.2	2.6	3.6	2.9	4.0	3.3

NOTES:

- This table has been established using a Live Load deflection equal to L / 240 and a Total Load deflection limit equal to L / 180.
- This table assumes a maximum roof slope of 12/12 and a 24" soffit.
- This table assumes uniform loads and simple span headers.

VERSA-LAM® 2800Fb 2.0E (1 3/4")

Snow Load of 20 psf

Dead Load of 15 psf

L/360

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
House Width [ft]																		
20	7' - 6"	8' - 7"	9' - 11"	11' - 4"	12' - 8"	14' - 5"	13' - 0"	14' - 10"	15' - 4"	17' - 6"	16' - 3"	18' - 6"	19' - 1"	21' - 9"	21' - 10"	24' - 10"	24' - 6"	27' - 11"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	1.9	1.5	2.2	1.7	2.5	1.9	2.8	2.2
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
24	7' - 2"	8' - 2"	9' - 5"	10' - 9"	12' - 0"	13' - 9"	12' - 4"	14' - 1"	14' - 7"	16' - 8"	15' - 5"	17' - 7"	18' - 2"	20' - 9"	20' - 9"	23' - 8"	23' - 4"	26' - 7"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.7	1.5	1.7	1.5	2.0	1.6	2.2	1.6	2.5	1.9	2.9	2.2	3.2	2.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
28	6' - 10"	7' - 10"	9' - 0"	10' - 4"	11' - 6"	13' - 2"	11' - 10"	13' - 6"	14' - 0"	16' - 0"	14' - 9"	16' - 10"	17' - 5"	19' - 10"	19' - 10"	22' - 8"	22' - 4"	25' - 5"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.9	1.5	1.9	1.5	2.3	1.7	2.4	1.8	2.8	2.2	3.2	2.4	3.6	2.7
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.8	1.5
32	6' - 7"	7' - 6"	8' - 8"	9' - 11"	11' - 1"	12' - 8"	11' - 4"	13' - 0"	13' - 5"	15' - 4"	14' - 2"	16' - 3"	16' - 9"	19' - 1"	19' - 1"	21' - 10"	21' - 6"	24' - 6"
End bearing_SPF Plate (in)	1.5	1.5	1.6	1.5	2.1	1.6	2.1	1.6	2.5	1.9	2.6	2.0	3.1	2.4	3.5	2.7	3.9	3.0
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.8	1.5	2.0	1.5
36	6' - 4"	7' - 3"	8' - 4"	9' - 7"	10' - 8"	12' - 3"	11' - 0"	12' - 6"	13' - 0"	14' - 10"	13' - 8"	15' - 8"	16' - 2"	18' - 5"	18' - 5"	21' - 1"	20' - 9"	23' - 8"
End bearing_SPF Plate (in)	1.5	1.5	1.8	1.5	2.2	1.7	2.3	1.8	2.7	2.1	2.9	2.2	3.4	2.6	3.8	2.9	4.3	3.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	2.0	1.5	2.2	1.7
40	6' - 2"	7' - 0"	8' - 1"	9' - 3"	10' - 4"	11' - 10"	10' - 7"	12' - 2"	12' - 7"	14' - 5"	13' - 3"	15' - 2"	15' - 8"	17' - 11"	17' - 11"	20' - 5"	20' - 1"	23' - 0"
End bearing_SPF Plate (in)	1.5	1.5	1.9	1.5	2.4	1.8	2.5	1.9	2.9	2.2	3.1	2.3	3.6	2.8	4.1	3.1	4.6	3.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.8	1.5	2.1	1.6	2.4	1.8

Snow Load of 40 psf

Dead Load of 15 psf

L/360

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
House Width [ft]																		
20	6' - 7"	7' - 6"	8' - 8"	9' - 11"	11' - 1"	12' - 8"	11' - 5"	13' - 0"	13' - 6"	15' - 5"	14' - 3"	16' - 3"	16' - 9"	19' - 2"	19' - 2"	21' - 11"	21' - 7"	24' - 7"
End bearing_SPF Plate (in)	1.5	1.5	1.6	1.5	2.1	1.6	2.1	1.6	2.5	1.9	2.7	2.0	3.1	2.4	3.6	2.7	4.0	3.1
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.8	1.5	2.0	1.6
24	6' - 2"	7' - 2"	8' - 3"	9' - 5"	10' - 6"	12' - 1"	10' - 10"	12' - 5"	12' - 10"	14' - 8"	13' - 6"	15' - 6"	15' - 11"	18' - 3"	18' - 3"	20' - 10"	20' - 6"	23' - 5"
End bearing_SPF Plate (in)	1.5	1.5	1.9	1.5	2.4	1.8	2.4	1.9	2.9	2.2	3.0	2.3	3.6	2.7	4.1	3.1	4.6	3.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.8	1.5	2.1	1.6	2.3	1.8
28	6' - 0"	6' - 10"	7' - 11"	9' - 0"	10' - 1"	11' - 6"	10' - 4"	11' - 10"	12' - 3"	14' - 0"	12' - 11"	14' - 10"	15' - 3"	17' - 5"	17' - 5"	19' - 11"	19' - 7"	22' - 5"
End bearing_SPF Plate (in)	1.6	1.5	2.1	1.6	2.6	2.0	2.7	2.1	3.2	2.5	3.4	2.6	4.0	3.0	4.5	3.5	5.1	3.9
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.6	2.3	1.8	2.6	2.0
32	5' - 9"	6' - 7"	7' - 7"	8' - 8"	9' - 8"	11' - 1"	10' - 0"	11' - 5"	11' - 10"	13' - 6"	12' - 5"	14' - 3"	14' - 8"	16' - 9"	16' - 9"	19' - 2"	18' - 10"	21' - 7"
End bearing_SPF Plate (in)	1.7	1.5	2.3	1.8	2.9	2.2	3.0	2.3	3.5	2.7	3.7	2.8	4.4	3.3	5.0	3.8	5.6	4.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	1.9	1.5	2.2	1.7	2.5	1.9	2.8	2.2
36	5' - 7"	6' - 4"	7' - 4"	8' - 5"	9' - 4"	10' - 9"	9' - 7"	11' - 0"	11' - 5"	13' - 0"	12' - 0"	13' - 9"	14' - 2"	16' - 3"	16' - 2"	18' - 6"	18' - 3"	20' - 10"
End bearing_SPF Plate (in)	1.9	1.5	2.5	1.9	3.1	2.4	3.2	2.5	3.8	2.9	4.0	3.1	4.7	3.6	5.4	4.1	6.1	4.6
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	1.9	1.5	2.1	1.6	2.4	1.8	2.7	2.1	3.1	2.4
40	5' - 5"	6' - 2"	7' - 1"	8' - 2"	9' - 1"	10' - 5"	9' - 4"	10' - 8"	11' - 0"	12' - 8"	11' - 8"	13' - 4"	13' - 9"	15' - 8"	15' - 8"	17' - 11"	17' - 8"	20' - 2"
End bearing_SPF Plate (in)	2.0	1.6	2.7	2.0	3.4	2.6	3.5	2.7	4.1	3.1	4.3	3.3	5.1	3.9	5.8	4.4	6.5	5.0
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.7	1.5	1.8	1.5	2.1	1.6	2.2	1.7	2.6	2.0	3.0	2.3	3.3	2.5

Snow Load of 60 psf

Dead Load of 15 psf

L/360

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
House Width [ft]																		
20	5' - 10"	6' - 8"	7' - 8"	8' - 9"	9' - 9"	11' - 3"	10' - 1"	11' - 6"	11' - 11"	13' - 8"	12' - 7"	14' - 5"	14' - 10"	17' - 0"	17' - 0"	19' - 5"	19' - 1"	21' - 10"
End bearing_SPF Plate (in)	1.5	1.5	2.0	1.5	2.5	1.9	2.6	2.0	3.1	2.4	3.2	2.5	3.8	2.9	4.3	3.3	4.9	3.7
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	1.9	1.5	2.2	1.7	2.5	1.9
24	5' - 6"	6' - 4"	7' - 3"	8' - 4"	9' - 4"	10' - 8"	9' - 7"	10' - 11"	11' - 4"	12' - 11"	11' - 11"	13' - 8"	14' - 1"	16' - 2"	16' - 1"	18' - 5"	18' - 2"	20' - 9"
End bearing_SPF Plate (in)	1.7	1.5	2.3	1.7	2.9	2.2	3.0	2.3	3.5	2.7	3.7	2.8	4.3	3.3	4.9	3.8	5.6	4.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	1.9	1.5	2.2	1.7	2.5	1.9	2.8	2.2
28	5' - 3"	6' - 0"	6' - 11"	8' - 0"	8' - 11"	10' - 2"	9' - 2"	10' - 5"	10' - 10"	12' - 5"	11' - 5"	13' - 4"	13' - 6"	15' - 5"	15' - 5"	17' - 8"	17' - 4"	19' - 10"
End bearing_SPF Plate (in)	1.9	1.5	2.5	1.9	3.2	2.5	3.3	2.5	3.9	3.0	4.1	3.1	4.8	3.7	5.5	4.2	6.2	4.7
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.1	1.6	2.5	1.9	2.8	2.2	3.1	2.4
32	5' - 1"	5' - 10"	6' - 8"	7' - 8"	8' - 7"	9' - 9"	8' - 9"	10' - 1"	10' - 5"	11' - 11"	11' - 0"	12' - 7"	12' - 11"	14' - 10"	14' - 10"	17' - 0"	16' - 8"	19' - 1"
End bearing_SPF Plate (in)	2.1	1.6	2.8	2.1	3.5	2.7	3.6	2.8	4.3	3.3	4.5	3.5	5.3	4.1	6.1	4.6	6.8	5.2
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.8	1.5	1.8	1.5	2.2	1.7	2.3	1.8	2.7	2.1	3.1	2.4	3.5	2.6
36	4' - 11"	5' - 7"	6' - 5"	7' - 5"	8' - 3"	9' - 5"	8' - 6"	9' - 8"	10' - 0"	11' - 6"	10' - 7"	12' - 2"	12' - 6"	14' - 4"	14' - 4"	16' - 4"	16' - 1"	18' - 5"
End bearing_SPF Plate (in)	2.3	1.8	3.0	2.3	3.8	2.9	3.9	3.0	4.6	3.5	4.9	3.7	5.8	4.4	6.6	5.0	7.4	5.6
End bearing_Member (in)	1.5	1.5	1.5	1.5	2.0	1.5	2.0	1.5	2.4	1.8	2.5	1.9	2.9	2.2	3.3	2.6	3.7	2.9
40	4' - 9"	5' - 5"	6' - 3"	7' - 2"	8' - 0"	9' - 2"	8' - 2"	9' - 5"	9' - 9"	11' - 2"	10' - 3"	11' - 9"	12' - 1"	13' - 10"	13' - 10"	15' - 10"	15' - 7"	17' - 10"
End bearing_SPF Plate (in)	2.5	1.9	3.2	2.5	4.1	3.1	4.2	3.2	5.0	3.8	5.3	4.0	6.2	4.7	7.1	5.4	7.9	6.1
End bearing_Member (in)	1.5	1.5	1.7	1.5	2.1	1.6	2.2	1.7	2.5	1.9	2.7	2.1	3.1	2.4	3.6	2.8	4.0	3.1

NOTES:

- This table has been established using a Live Load deflection equal to L / 360 and a Total Load def

14 HEADER SPAN TABLES ROOF + ONE STOREY (NO CENTER BEARING)

VERSA-LAM® 2800Fb 2.0E (1 3/4")

Snow Load of 20 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/360

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	5'-4"	6'-1"	7'-0"	8'-0"	8'-11"	10'-3"	9'-2"	10'-6"	10'-10"	12'-5"	11'-6"	13'-2"	13'-6"	15'-6"	15'-6"	17'-8"	17'-5"	19'-11"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
24	5'-0"	5'-9"	6'-8"	7'-7"	8'-6"	9'-8"	8'-9"	10'-0"	10'-4"	11'-10"	10'-11"	12'-6"	12'-10"	14'-8"	14'-8"	16'-9"	16'-6"	18'-11"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
28	4'-10"	5'-6"	6'-4"	7'-3"	8'-1"	9'-3"	8'-4"	9'-6"	9'-10"	11'-3"	10'-5"	11'-11"	12'-3"	14'-1"	14'-0"	16'-1"	15'-9"	18'-1"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
32	4'-7"	5'-3"	6'-1"	7'-0"	7'-9"	8'-11"	8'-0"	9'-2"	9'-6"	10'-10"	10'-0"	11'-5"	11'-10"	13'-6"	13'-6"	15'-5"	15'-2"	17'-4"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
36	4'-5"	5'-1"	5'-11"	6'-9"	7'-6"	8'-7"	7'-9"	8'-10"	9'-2"	10'-6"	9'-8"	11'-1"	11'-5"	13'-0"	13'-0"	14'-11"	14'-8"	16'-9"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
40	4'-4"	4'-11"	5'-8"	6'-6"	7'-3"	8'-4"	7'-6"	8'-7"	8'-10"	10'-2"	9'-4"	10'-8"	11'-0"	12'-7"	12'-7"	14'-5"	14'-2"	16'-3"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5


Snow Load of 40 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/360

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	5'-0"	5'-9"	6'-8"	7'-7"	8'-6"	9'-8"	8'-9"	10'-0"	10'-4"	11'-10"	10'-11"	12'-6"	12'-10"	14'-8"	14'-8"	16'-9"	16'-6"	18'-11"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
24	4'-9"	5'-6"	6'-4"	7'-3"	8'-1"	9'-3"	8'-3"	9'-6"	9'-10"	11'-3"	10'-4"	11'-10"	12'-2"	13'-11"	13'-11"	15'-11"	15'-8"	17'-11"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
28	4'-7"	5'-3"	6'-0"	6'-11"	7'-8"	8'-10"	7'-11"	9'-1"	9'-4"	10'-9"	9'-11"	11'-4"	11'-8"	13'-4"	13'-4"	15'-3"	15'-0"	17'-2"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
32	4'-5"	5'-0"	5'-9"	6'-8"	7'-5"	8'-6"	7'-7"	8'-8"	9'-0"	10'-4"	9'-6"	10'-10"	11'-2"	12'-10"	12'-10"	14'-8"	14'-5"	16'-6"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
36	4'-3"	4'-10"	5'-7"	6'-5"	7'-2"	8'-2"	7'-4"	8'-5"	8'-8"	9'-11"	9'-2"	10'-6"	10'-9"	12'-4"	12'-3"	14'-2"	13'-8"	15'-11"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
40	4'-1"	4'-8"	5'-5"	6'-2"	6'-11"	7'-11"	7'-1"	8'-1"	8'-4"	9'-7"	8'-9"	10'-2"	10'-3"	12'-0"	11'-8"	13'-8"	13'-0"	15'-5"
End bearing_SPF Plate (in)	1.6	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5

Snow Load of 60 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/360

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	4'-10"	5'-6"	6'-4"	7'-3"	8'-1"	9'-3"	8'-4"	9'-6"	9'-10"	11'-3"	10'-5"	11'-11"	12'-3"	14'-1"	14'-0"	16'-1"	15'-9"	18'-1"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
24	4'-7"	5'-3"	6'-0"	6'-11"	7'-8"	8'-10"	7'-11"	9'-1"	9'-4"	10'-9"	9'-11"	11'-4"	11'-8"	13'-4"	13'-4"	15'-3"	15'-0"	17'-2"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
28	4'-4"	5'-0"	5'-9"	6'-7"	7'-4"	8'-5"	7'-7"	8'-8"	8'-11"	10'-3"	9'-5"	10'-10"	11'-1"	12'-9"	12'-9"	14'-7"	14'-1"	16'-5"
End bearing_SPF Plate (in)	1.6	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
32	4'-2"	4'-10"	5'-6"	6'-4"	7'-1"	8'-1"	7'-3"	8'-4"	8'-6"	9'-10"	8'-11"	10'-5"	10'-5"	12'-3"	11'-10"	14'-0"	13'-3"	15'-9"
End bearing_SPF Plate (in)	1.8	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
36	4'-0"	4'-8"	5'-4"	6'-1"	6'-8"	7'-10"	6'-10"	8'-0"	8'-1"	9'-6"	8'-6"	10'-0"	9'-11"	11'-10"	11'-3"	13'-6"	12'-7"	15'-3"
End bearing_SPF Plate (in)	1.9	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
40	3'-11"	4'-6"	5'-1"	5'-11"	6'-4"	7'-7"	6'-6"	7'-9"	7'-8"	9'-2"	8'-1"	9'-9"	9'-5"	11'-5"	10'-8"	13'-1"	12'-0"	14'-8"
End bearing_SPF Plate (in)	2.0	1.6	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5

- NOTES:**
- This table has been established using a Live Load deflection equal to L / 360 and a Total Load deflection limit equal to L / 240.
 - This table assumes a maximum roof slope of 12/12 and a 24" soffit.
 - This table assumes uniform loads and simple span headers.
 - Table values are based on SPF specified compression strength perpendicular to grain for plate of 769 psi.
 - Minimum bearing lengths required are based on a minimum bearing width equal to or greater than the width of the supported beam.
 - Span is measured center to center of the supports.
 - Table values assume an exterior wall dead load of 100 pcf.
 - Table values assume that lateral support is provided at each support and continuously along the compression edge of the beam.**
 - Multi-ply members may be substituted with solid section beams.

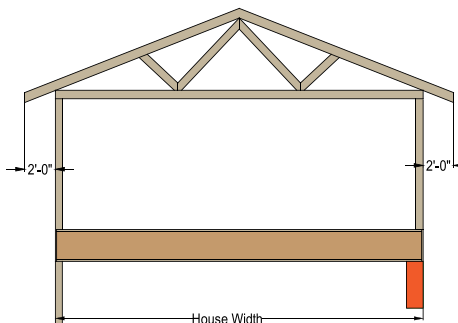

VERSA-LAM® 2800Fb 2.0E (1¾")

Snow Load of 20 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/480

Beam Depth		5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
		2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
House Width [ft]	20	5' - 4"	6' - 1"	7' - 0"	8' - 0"	8' - 11"	10' - 3"	9' - 2"	10' - 6"	10' - 10"	12' - 5"	11' - 6"	13' - 2"	13' - 6"	15' - 6"	15' - 6"	17' - 8"	17' - 5"	19' - 11"
	End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.8	1.5	2.0	1.6
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	24	5' - 0"	5' - 9"	6' - 8"	7' - 7"	8' - 6"	9' - 8"	8' - 9"	10' - 0"	10' - 4"	11' - 10"	10' - 11"	12' - 6"	12' - 10"	14' - 8"	14' - 8"	16' - 9"	16' - 6"	18' - 11"
	End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	2.1	1.6	2.3	1.8
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	28	4' - 10"	5' - 6"	6' - 4"	7' - 3"	8' - 1"	9' - 3"	8' - 4"	9' - 6"	9' - 10"	11' - 3"	10' - 5"	11' - 11"	12' - 3"	14' - 1"	14' - 0"	16' - 1"	15' - 9"	18' - 1"
	End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.3	1.8	2.6	2.0
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	32	4' - 7"	5' - 3"	6' - 1"	7' - 0"	7' - 9"	8' - 11"	8' - 0"	9' - 2"	9' - 6"	10' - 10"	10' - 0"	11' - 5"	11' - 10"	13' - 6"	13' - 6"	15' - 5"	15' - 2"	17' - 4"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	1.9	1.5	2.2	1.7	2.5	1.9	2.8	2.2	
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
36	4' - 5"	5' - 1"	5' - 11"	6' - 9"	7' - 6"	8' - 7"	7' - 9"	8' - 10"	9' - 2"	10' - 6"	9' - 8"	11' - 1"	11' - 5"	13' - 0"	13' - 0"	14' - 11"	14' - 8"	16' - 9"	
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.6	1.5	1.9	1.5	2.0	1.6	2.4	1.8	2.7	2.1	3.0	2.3	
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
40	4' - 4"	4' - 11"	5' - 8"	6' - 6"	7' - 3"	8' - 4"	7' - 6"	8' - 7"	8' - 10"	10' - 2"	9' - 4"	10' - 8"	11' - 0"	12' - 1"	12' - 1"	14' - 5"	14' - 2"	16' - 3"	
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.7	1.5	1.8	1.5	2.1	1.6	2.2	1.7	2.6	2.0	2.9	2.2	3.3	2.5	
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	

Snow Load of 40 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/480


Beam Depth		5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
		2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
House Width [ft]	20	4' - 11"	5' - 8"	6' - 6"	7' - 5"	8' - 4"	9' - 6"	8' - 6"	9' - 9"	10' - 1"	11' - 7"	10' - 8"	12' - 3"	12' - 7"	14' - 5"	14' - 5"	16' - 6"	16' - 3"	18' - 7"
	End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.6	1.5	1.9	1.5	2.0	1.5	2.4	1.8	2.7	2.1	3.0	2.3
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	24	4' - 8"	5' - 4"	6' - 2"	7' - 1"	7' - 10"	9' - 0"	8' - 1"	9' - 3"	9' - 7"	10' - 11"	10' - 1"	11' - 7"	11' - 11"	13' - 8"	13' - 7"	15' - 7"	15' - 4"	17' - 7"
	End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.8	1.5	1.8	1.5	2.2	1.7	2.3	1.7	2.7	2.1	3.0	2.3	3.4	2.6
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	28	4' - 5"	5' - 1"	5' - 10"	6' - 9"	7' - 6"	8' - 7"	7' - 8"	8' - 10"	9' - 1"	10' - 5"	9' - 8"	11' - 0"	11' - 4"	13' - 0"	13' - 0"	14' - 10"	14' - 7"	16' - 9"
	End bearing_SPF Plate (in)	1.5	1.5	1.6	1.5	2.0	1.5	2.0	1.6	2.4	1.8	2.5	1.9	3.0	2.3	3.4	2.6	3.8	2.9
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	32	4' - 3"	4' - 10"	5' - 7"	6' - 5"	7' - 2"	8' - 3"	7' - 5"	8' - 5"	8' - 9"	10' - 0"	9' - 3"	10' - 7"	10' - 11"	12' - 6"	12' - 5"	14' - 3"	14' - 0"	16' - 1"
End bearing_SPF Plate (in)	1.5	1.5	1.7	1.5	2.2	1.7	2.2	1.7	2.6	2.0	2.8	2.1	3.3	2.5	3.7	2.8	4.2	3.2	
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
36	4' - 1"	4' - 8"	5' - 5"	6' - 2"	6' - 11"	7' - 11"	7' - 1"	8' - 2"	8' - 5"	9' - 8"	8' - 11"	10' - 2"	10' - 6"	12' - 0"	12' - 0"	13' - 9"	13' - 6"	15' - 6"	
End bearing_SPF Plate (in)	1.5	1.5	1.8	1.5	2.3	1.8	2.4	1.8	2.8	2.2	3.0	2.3	3.5	2.7	4.0	3.1	4.5	3.5	
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
40	4' - 0"	4' - 6"	5' - 3"	6' - 0"	6' - 8"	7' - 8"	6' - 10"	7' - 10"	8' - 2"	9' - 4"	8' - 7"	9' - 10"	10' - 2"	11' - 7"	11' - 7"	13' - 3"	13' - 0"	14' - 11"	
End bearing_SPF Plate (in)	1.5	1.5	2.0	1.5	2.5	1.9	2.6	2.0	3.0	2.3	3.2	2.5	3.8	2.9	4.3	3.3	4.8	3.7	
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.6	1.5	1.6	1.5	1.5	1.5	1.5	1.5	

Snow Load of 60 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/480

Beam Depth		5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
		2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
House Width [ft]	20	4' - 6"	5' - 2"	6' - 0"	6' - 10"	7' - 8"	8' - 9"	7' - 10"	9' - 0"	9' - 4"	10' - 8"	9' - 10"	11' - 3"	11' - 7"	13' - 4"	13' - 3"	15' - 3"	14' - 11"	17' - 2"
	End bearing_SPF Plate (in)	1.5	1.5	1.6	1.5	2.0	1.5	2.0	1.6	2.4	1.9	2.5	2.0	3.0	2.3	3.4	2.6	3.8	2.9
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	24	4' - 4"	4' - 11"	5' - 8"	6' - 6"	7' - 3"	8' - 4"	7' - 5"	8' - 6"	8' - 10"	10' - 1"	9' - 4"	10' - 8"	11' - 0"	12' - 7"	12' - 7"	14' - 5"	14' - 2"	16' - 3"
	End bearing_SPF Plate (in)	1.5	1.5	1.8	1.5	2.3	1.7	2.3	1.8	2.7	2.1	2.9	2.2	3.4	2.6	3.9	3.0	4.4	3.3
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	28	4' - 1"	4' - 8"	5' - 5"	6' - 2"	6' - 11"	7' - 11"	7' - 1"	8' - 2"	8' - 5"	9' - 8"	8' - 11"	10' - 2"	10' - 6"	12' - 0"	12' - 0"	13' - 9"	13' - 6"	15' - 6"
	End bearing_SPF Plate (in)	1.5	1.5	2.0	1.5	2.5	1.9	2.6	2.0	3.0	2.3	3.2	2.5	3.8	2.9	4.3	3.3	4.8	3.7
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.6	1.5	1.6	1.5	1.5	1.5	1.5	1.5
	32	3' - 11"	4' - 6"	5' - 2"	5' - 11"	6' - 8"	7' - 7"	6' - 10"	7' - 10"	8' - 1"	9' - 3"	8' - 6"	9' - 9"	10' - 1"	11' - 6"	11' - 6"	13' - 2"	12' - 11"	14' - 10"
End bearing_SPF Plate (in)	1.7	1.5	2.2	1.7	2.8	2.1	2.8	2.2	3.3	2.6	3.5	2.7	4.1	3.2	4.7	3.6	5.3	4.1	
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.8	1.5	2.1	1.6	2.4	1.8	2.7	2.1	
36	3' - 9"	4' - 4"	5' - 0"	5' - 9"	6' - 5"	7' - 4"	6' - 7"	7' - 6"	7' - 9"	8' - 11"	8' - 3"	9' - 5"	9' - 8"	11' - 1"	11' - 1"	12' - 8"	12' - 6"	14' - 4"	
End bearing_SPF Plate (in)	1.8	1.5	2.3	1.8	3.0	2.3	3.1	2.3	3.6	2.8	3.8	2.9	4.5	3.4	5.1	3.9	5.7	4.4	
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.8	1.5	1.9	1.5	2.3	1.8	2.6	2.0	2.9	2.2	
40	3' - 8"	4' - 2"	4' - 10"	5' - 7"	6' - 2"	7' - 1"	6' - 4"	7' - 3"	7' - 6"	8' - 8"	7' - 11"	9' - 1"	9' - 5"	10' - 9"	10' - 8"	12' - 4"	12' - 0"	13' - 10"	
End bearing_SPF Plate (in)	1.9	1.5	2.5	1.9	3.2	2.5	3.3	2.5	3.9	3.0	4.1	3.1	4.8	3.7	5.5	4.2	6.1	4.7	
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.1	1.6	2.5	1.9	2.8	2.1	3.1	2.4	

NOTES:

- This table has been established using a Live Load deflection equal to L / 480 and a Total Load deflection limit equal to L / 240.
- This table assumes a maximum roof slope of 12/12 and a 24" soffit.
- This table assumes uniform loads and simple span headers.
- Table values are based on SPF specified compression strength perpendicular to grain for plate of 769 psi.
- Minimum bearing lengths required are based on a minimum bearing width equal to or greater than the width of the supported beam.
- Span is measured center to center of the supports.
- Table values assume an exterior wall dead load of 100 pif.
- **Table values assume that lateral support is provided at each support and continuously along the compression edge of the beam.**
- Multi-ply members may be substituted with solid section beams.

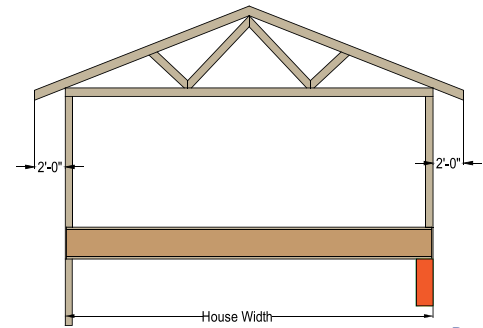

16 HEADER SPAN TABLES ROOF + ONE STOREY (CENTER BEARING)

VERSA-LAM® 2800Fb 2.0E (1 3/4")

Snow Load of 20 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/360

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	5' - 11"	6' - 9"	7' - 10"	8' - 11"	10' - 0"	11' - 5"	10' - 3"	11' - 8"	12' - 1"	13' - 10"	12' - 10"	14' - 8"	15' - 1"	17' - 3"	17' - 3"	19' - 8"	19' - 5"	22' - 2"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	2.0	1.5	2.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
24	5' - 8"	6' - 5"	7' - 5"	8' - 6"	9' - 6"	10' - 10"	9' - 9"	11' - 2"	11' - 7"	13' - 2"	12' - 2"	13' - 11"	14' - 4"	16' - 5"	16' - 5"	18' - 9"	18' - 6"	21' - 1"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.3	1.8	2.6	2.0
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
28	5' - 5"	6' - 2"	7' - 1"	8' - 2"	9' - 1"	10' - 5"	9' - 4"	10' - 8"	11' - 1"	12' - 8"	11' - 8"	13' - 4"	13' - 9"	15' - 9"	15' - 9"	18' - 0"	17' - 8"	20' - 3"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	1.9	1.5	2.2	1.7	2.6	2.0	2.9	2.2
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
32	5' - 2"	5' - 11"	6' - 10"	7' - 10"	8' - 9"	10' - 0"	9' - 0"	10' - 3"	10' - 8"	12' - 2"	11' - 3"	12' - 10"	13' - 3"	15' - 2"	15' - 2"	17' - 4"	17' - 1"	19' - 6"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.1	1.6	2.5	1.9	2.8	2.1	3.1	2.4
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
36	5' - 0"	5' - 9"	6' - 8"	7' - 7"	8' - 6"	9' - 8"	8' - 8"	9' - 11"	10' - 4"	11' - 9"	10' - 10"	12' - 5"	12' - 10"	14' - 8"	14' - 8"	16' - 9"	16' - 6"	18' - 10"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.8	1.5	1.8	1.5	2.2	1.7	2.3	1.7	2.7	2.0	3.0	2.3	3.4	2.6
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5
40	4' - 10"	5' - 7"	6' - 5"	7' - 4"	8' - 2"	9' - 5"	8' - 5"	9' - 8"	10' - 0"	11' - 5"	10' - 7"	12' - 1"	12' - 5"	14' - 3"	14' - 3"	16' - 3"	16' - 0"	18' - 3"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.9	1.5	2.0	1.5	2.3	1.8	2.4	1.9	2.9	2.2	3.3	2.5	3.7	2.8
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.9	1.5

Snow Load of 40 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/360


Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	5' - 6"	6' - 4"	7' - 3"	8' - 4"	9' - 3"	10' - 7"	9' - 6"	10' - 11"	11' - 4"	12' - 11"	11' - 11"	13' - 8"	14' - 1"	16' - 1"	16' - 1"	18' - 4"	18' - 1"	20' - 8"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.8	1.5	1.8	1.5	2.1	1.6	2.2	1.7	2.6	2.0	3.0	2.3	3.4	2.6
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5
24	5' - 3"	6' - 0"	6' - 11"	7' - 11"	8' - 10"	10' - 1"	9' - 1"	10' - 5"	10' - 9"	12' - 4"	11' - 4"	13' - 0"	13' - 5"	15' - 4"	15' - 4"	17' - 6"	17' - 3"	19' - 8"
End bearing_SPF Plate (in)	1.5	1.5	1.6	1.5	2.0	1.5	2.1	1.6	2.4	1.9	2.6	2.0	3.0	2.3	3.4	2.6	3.8	2.9
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	2.0	1.5
28	5' - 0"	5' - 9"	6' - 8"	7' - 7"	8' - 6"	9' - 8"	8' - 8"	9' - 11"	10' - 4"	11' - 9"	10' - 10"	12' - 5"	12' - 10"	14' - 8"	14' - 8"	16' - 9"	16' - 6"	18' - 10"
End bearing_SPF Plate (in)	1.5	1.5	1.8	1.5	2.2	1.7	2.3	1.8	2.7	2.1	2.8	2.2	3.3	2.6	3.8	2.9	4.3	3.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.9	1.5	2.2	1.7
32	4' - 10"	5' - 6"	6' - 5"	7' - 4"	8' - 2"	9' - 4"	8' - 4"	9' - 7"	9' - 11"	11' - 4"	10' - 6"	12' - 0"	12' - 4"	14' - 1"	14' - 1"	16' - 2"	15' - 11"	18' - 2"
End bearing_SPF Plate (in)	1.5	1.5	1.9	1.5	2.4	1.9	2.5	1.9	3.0	2.3	3.1	2.4	3.7	2.8	4.2	3.2	4.7	3.6
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.9	1.5	2.1	1.6	2.4	1.8
36	4' - 8"	5' - 4"	6' - 2"	7' - 1"	7' - 11"	9' - 0"	8' - 1"	9' - 3"	9' - 7"	11' - 0"	10' - 1"	11' - 7"	11' - 11"	13' - 8"	13' - 8"	15' - 7"	15' - 4"	17' - 7"
End bearing_SPF Plate (in)	1.6	1.5	2.1	1.6	2.7	2.0	2.7	2.1	3.2	2.5	3.4	2.6	4.0	3.1	4.6	3.5	5.1	3.9
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.6	2.3	1.8	2.6	2.0
40	4' - 6"	5' - 2"	6' - 0"	6' - 10"	7' - 8"	8' - 9"	7' - 10"	9' - 0"	9' - 3"	10' - 8"	9' - 10"	11' - 3"	11' - 7"	13' - 3"	13' - 2"	15' - 2"	14' - 9"	17' - 0"
End bearing_SPF Plate (in)	1.7	1.5	2.3	1.7	2.9	2.2	2.9	2.2	3.5	2.7	3.7	2.8	4.3	3.3	4.9	3.8	5.5	4.2
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5

Snow Load of 60 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/360

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	5' - 2"	5' - 11"	6' - 10"	7' - 10"	8' - 9"	10' - 0"	9' - 0"	10' - 4"	10' - 8"	12' - 2"	11' - 3"	12' - 10"	13' - 3"	15' - 2"	15' - 2"	17' - 4"	17' - 1"	19' - 6"
End bearing_SPF Plate (in)	1.5	1.5	1.8	1.5	2.3	1.7	2.3	1.8	2.8	2.1	2.9	2.2	3.4	2.6	3.9	3.0	4.4	3.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	2.0	1.5	2.2	1.7
24	4' - 11"	5' - 8"	6' - 6"	7' - 6"	8' - 4"	9' - 6"	8' - 7"	9' - 10"	10' - 2"	11' - 7"	10' - 9"	12' - 3"	12' - 8"	14' - 5"	14' - 5"	16' - 6"	16' - 3"	18' - 7"
End bearing_SPF Plate (in)	1.6	1.5	2.0	1.6	2.6	2.0	2.7	2.0	3.1	2.4	3.3	2.5	3.9	3.0	4.4	3.4	5.0	3.8
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.3	1.7	2.5	1.9
28	4' - 9"	5' - 5"	6' - 3"	7' - 2"	8' - 0"	9' - 2"	8' - 2"	9' - 5"	9' - 9"	11' - 1"	10' - 3"	11' - 9"	12' - 1"	13' - 10"	13' - 10"	15' - 10"	15' - 6"	17' - 9"
End bearing_SPF Plate (in)	1.7	1.5	2.3	1.7	2.9	2.2	3.0	2.3	3.5	2.7	3.7	2.8	4.3	3.3	5.0	3.8	5.5	4.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	1.9	1.5	2.2	1.7	2.5	1.9	2.8	2.2
32	4' - 7"	5' - 3"	6' - 0"	6' - 11"	7' - 8"	8' - 10"	7' - 11"	9' - 0"	9' - 4"	10' - 8"	9' - 10"	11' - 4"	11' - 6"	13' - 4"	13' - 1"	15' - 3"	14' - 7"	17' - 1"
End bearing_SPF Plate (in)	1.9	1.5	2.5	1.9	3.2	2.4	3.3	2.5	3.8	2.9	4.1	3.1	4.7	3.7	5.4	4.2	6.0	4.7
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.1	1.6	2.4	1.9	2.7	2.1	3.0	2.4
36	4' - 5"	5' - 0"	5' - 10"	6' - 8"	7' - 5"	8' - 6"	7' - 7"	8' - 9"	8' - 11"	10' - 4"	9' - 4"	10' - 11"	10' - 11"	12' - 10"	12' - 5"	14' - 9"	13' - 11"	16' - 7"
End bearing_SPF Plate (in)	2.1	1.6	2.7	2.1	3.4	2.6	3.5	2.7	4.1	3.2	4.3	3.4	5.0	4.0	5.7	4.5	6.4	5.1
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.8	1.5	1.8	1.5	2.1	1.6	2.2	1.7	2.6	2.0	2.9	2.3	3.2	2.6
40	4' - 3"	4' - 11"	5' - 7"	6' - 5"	7' - 1"	8' - 3"	7' - 3"	8' - 6"	8' - 6"	10' - 0"	8' - 11"	10' - 7"	10' - 5"	12' - 6"	11' - 10"	14' - 3"	13' - 3"	16' - 1"
End bearing_SPF Plate (in)	2.2	1.7	2.9	2.2	3.6	2.8	3.7	2.9	4.4	3.4	4.6	3.6	5.4	4.3	6.1	4.9	6.8	5.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.9	1.5	1.9	1.5	2.2	1.8	2.3	1.9	2.7	2.2	3.1	2.5	3.4	2.8

NOTES:

- This table has been established using a Live Load deflection equal to L / 360 and a Total Load deflection limit equal to L / 240.
- This table assumes a maximum roof slope of 12/12 and a 24" soffit.
- This table assumes uniform loads and simple span headers.
- Table values are based on SPF specified compression strength perpendicular to grain for plate of 769 psi.
- Minimum bearing lengths required are based on a minimum bearing width equal to or greater than the width of the supported beam.
- Span is measured center to center of the supports.
- Table values assume an exterior wall dead load of 100 plf.
- Table values assume that lateral support is provided at each support and continuously along the compression edge of the beam.**
- Multi-ply members may be substituted with solid section beams.

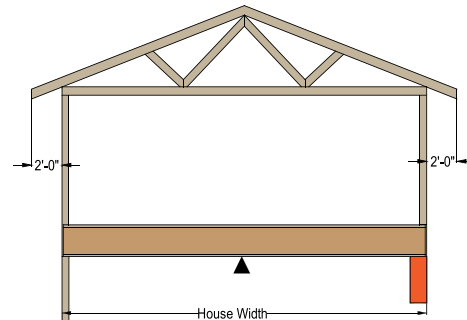

HEADER SPAN TABLES ROOF + ONE STOREY (CENTER BEARING) CON'T 17

VERSA-LAM® 2800Fb 2.0E (1¾")

Snow Load of 20 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/480

Beam Depth		5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
		2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
House Width [ft]	20	5' - 11"	6' - 9"	7' - 10"	8' - 11"	10' - 0"	11' - 5"	10' - 3"	11' - 8"	12' - 1"	13' - 10"	12' - 10"	14' - 8"	15' - 1"	17' - 3"	17' - 3"	19' - 8"	19' - 5"	22' - 2"
	End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	2.0	1.5	2.3	1.7
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	24	5' - 8"	6' - 5"	7' - 5"	8' - 6"	9' - 6"	10' - 10"	9' - 9"	11' - 2"	11' - 7"	13' - 2"	12' - 2"	13' - 11"	14' - 4"	16' - 5"	16' - 5"	18' - 9"	18' - 6"	21' - 1"
	End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.3	1.8	2.6	2.0
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	28	5' - 5"	6' - 2"	7' - 1"	8' - 2"	9' - 1"	10' - 5"	9' - 4"	10' - 8"	11' - 1"	12' - 8"	11' - 8"	13' - 4"	13' - 9"	15' - 9"	15' - 9"	18' - 0"	17' - 8"	20' - 3"
	End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	1.9	1.5	2.2	1.7	2.6	2.0	2.9	2.2
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	32	5' - 2"	5' - 11"	6' - 10"	7' - 10"	8' - 9"	10' - 0"	9' - 0"	10' - 3"	10' - 8"	12' - 2"	11' - 3"	12' - 10"	13' - 3"	15' - 2"	15' - 2"	17' - 4"	17' - 1"	19' - 6"
	End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.1	1.6	2.5	1.9	2.8	2.1	3.1	2.4
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	36	5' - 0"	5' - 9"	6' - 8"	7' - 7"	8' - 6"	9' - 8"	8' - 8"	9' - 11"	10' - 4"	11' - 9"	10' - 10"	12' - 5"	12' - 10"	14' - 8"	14' - 8"	16' - 9"	16' - 6"	18' - 10"
	End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.8	1.5	1.8	1.5	2.2	1.7	2.3	1.7	2.7	2.0	3.0	2.3	3.4	2.6
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5
	40	4' - 10"	5' - 7"	6' - 5"	7' - 4"	8' - 2"	9' - 5"	8' - 5"	9' - 8"	10' - 0"	11' - 5"	10' - 7"	12' - 1"	12' - 5"	14' - 3"	14' - 3"	16' - 3"	16' - 0"	18' - 3"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.9	1.5	2.0	1.5	2.3	1.8	2.4	1.9	2.9	2.2	3.3	2.5	3.7	2.8	
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.9	1.5	

Snow Load of 40 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/480


Beam Depth		5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
		2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
House Width [ft]	20	5' - 4"	6' - 2"	7' - 1"	8' - 1"	9' - 1"	10' - 5"	9' - 4"	10' - 8"	11' - 0"	12' - 8"	11' - 8"	13' - 4"	13' - 9"	15' - 9"	15' - 8"	18' - 0"	17' - 8"	20' - 3"
	End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.7	1.5	1.8	1.5	2.1	1.6	2.2	1.7	2.6	2.0	2.9	2.2	3.3	2.5
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	24	5' - 1"	5' - 10"	6' - 9"	7' - 8"	8' - 7"	9' - 10"	8' - 10"	10' - 1"	10' - 5"	12' - 0"	11' - 0"	12' - 8"	13' - 0"	14' - 11"	14' - 10"	17' - 0"	16' - 9"	19' - 2"
	End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.9	1.5	2.0	1.5	2.4	1.8	2.5	1.9	2.9	2.2	3.3	2.5	3.7	2.9
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.9	1.5
	28	4' - 10"	5' - 7"	6' - 5"	7' - 4"	8' - 2"	9' - 5"	8' - 5"	9' - 8"	10' - 0"	11' - 5"	10' - 6"	12' - 1"	12' - 5"	14' - 3"	14' - 2"	16' - 3"	16' - 0"	18' - 4"
	End bearing_SPF Plate (in)	1.5	1.5	1.7	1.5	2.2	1.7	2.2	1.7	2.6	2.0	2.8	2.1	3.2	2.5	3.7	2.8	4.2	3.2
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.9	1.5	2.1	1.6
	32	4' - 8"	5' - 4"	6' - 2"	7' - 1"	7' - 10"	9' - 0"	8' - 1"	9' - 3"	9' - 7"	10' - 11"	10' - 1"	11' - 1"	11' - 11"	13' - 8"	13' - 7"	15' - 7"	15' - 4"	17' - 7"
	End bearing_SPF Plate (in)	1.5	1.5	1.9	1.5	2.4	1.8	2.4	1.9	2.9	2.2	3.0	2.3	3.5	2.7	4.0	3.1	4.5	3.5
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	2.1	1.6	2.3	1.8
	36	4' - 6"	5' - 2"	5' - 11"	6' - 10"	7' - 7"	8' - 8"	7' - 9"	8' - 11"	9' - 3"	10' - 7"	9' - 9"	11' - 2"	11' - 6"	13' - 2"	13' - 2"	15' - 1"	14' - 9"	16' - 11"
	End bearing_SPF Plate (in)	1.5	1.5	2.0	1.6	2.6	2.0	2.6	2.0	3.1	2.4	3.3	2.5	3.8	2.9	4.4	3.4	4.9	3.8
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.2	1.7	2.5	1.9
	40	4' - 4"	5' - 0"	5' - 9"	6' - 7"	7' - 4"	8' - 5"	7' - 6"	8' - 7"	8' - 11"	10' - 3"	9' - 5"	10' - 10"	11' - 1"	12' - 9"	12' - 9"	14' - 7"	14' - 4"	16' - 5"
End bearing_SPF Plate (in)	1.7	1.5	2.2	1.7	2.7	2.1	2.8	2.2	3.3	2.6	3.5	2.7	4.1	3.2	4.7	3.6	5.3	4.1	
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.8	1.5	1.8	1.6	2.4	1.8	2.7	2.1	

Snow Load of 60 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/480

Beam Depth		5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
		2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
House Width [ft]	20	4' - 10"	5' - 7"	6' - 5"	7' - 4"	8' - 2"	9' - 5"	8' - 5"	9' - 8"	10' - 0"	11' - 5"	10' - 6"	12' - 1"	12' - 5"	14' - 3"	14' - 2"	16' - 3"	16' - 0"	18' - 3"
	End bearing_SPF Plate (in)	1.5	1.5	1.7	1.5	2.1	1.6	2.2	1.7	2.6	2.0	2.7	2.1	3.2	2.5	3.6	2.8	4.1	3.1
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.9	1.5	2.1	1.6
	24	4' - 7"	5' - 3"	6' - 1"	6' - 11"	7' - 9"	8' - 11"	8' - 0"	9' - 2"	9' - 5"	10' - 10"	10' - 0"	11' - 5"	11' - 9"	13' - 6"	13' - 5"	15' - 5"	15' - 2"	17' - 4"
	End bearing_SPF Plate (in)	1.5	1.5	1.9	1.5	2.4	1.9	2.5	1.9	2.9	2.2	3.1	2.4	3.6	2.8	4.1	3.2	4.7	3.6
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.9	1.5	2.1	1.6	2.4	1.8
	28	4' - 5"	5' - 0"	5' - 10"	6' - 8"	7' - 5"	8' - 6"	7' - 7"	8' - 9"	9' - 0"	10' - 4"	9' - 6"	10' - 11"	11' - 3"	12' - 10"	12' - 10"	14' - 9"	14' - 5"	16' - 7"
	End bearing_SPF Plate (in)	1.6	1.5	2.1	1.6	2.7	2.1	2.8	2.1	3.3	2.5	3.4	2.6	4.0	3.1	4.6	3.5	5.2	4.0
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.8	1.5	2.1	1.6	2.3	1.8	2.6	2.0
	32	4' - 3"	4' - 10"	5' - 7"	6' - 5"	7' - 1"	8' - 2"	7' - 4"	8' - 4"	8' - 8"	9' - 11"	9' - 2"	10' - 6"	10' - 9"	12' - 4"	12' - 4"	14' - 2"	13' - 11"	15' - 11"
	End bearing_SPF Plate (in)	1.8	1.5	2.3	1.8	2.9	2.3	3.0	2.3	3.6	2.7	3.8	2.9	4.4	3.4	5.1	3.9	5.7	4.3
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	1.9	1.5	2.3	1.7	2.6	2.0	2.9	2.2
	36	4' - 1"	4' - 8"	5' - 4"	6' - 2"	6' - 10"	7' - 10"	7' - 1"	8' - 1"	8' - 4"	9' - 7"	8' - 10"	10' - 1"	10' - 5"	11' - 11"	11' - 11"	13' - 7"	13' - 5"	15' - 4"
	End bearing_SPF Plate (in)	1.9	1.5	2.5	1.9	3.2	2.4	3.3	2.5	3.9	3.0	4.1	3.1	4.8	3.7	5.5	4.2	6.2	4.7
	End bearing_Member (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.1	1.6	2.4	1.9	2.8	2.1	3.1	2.4
	40	3' - 11"	4' - 6"	5' - 2"	5' - 11"	6' - 8"	7' - 7"	6' - 10"	7' - 10"	8' - 1"	9' - 3"	8' - 6"	9' - 9"	10' - 1"	11' - 6"	11' - 6"	13' - 2"	12' - 11"	14' - 10"
End bearing_SPF Plate (in)	2.1	1.6	2.7	2.1	3.4	2.6	3.5	2.7	4.2	3.2	4.4	3.4	5.2	3.9	5.9	4.5	6.6	5.1	
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.8	1.5	1.8	1.5	2.1	1.6	2.2	1.7	2.6	2.0	3.0	2.3	3.4	2.6	

NOTES:

- This table has been established using a Live Load deflection equal to L / 480 and a Total Load deflection limit equal to L / 240.
- This table assumes a maximum roof slope of 12/12 and a 24" soffit.
- This table assumes uniform loads and simple span headers.
- Table values are based on SPF specified compression strength perpendicular to grain for plate of 769 psi.
- Minimum bearing lengths required are based on a minimum bearing width equal to or greater than the width of the supported beam.
- Span is measured center to center of the supports.
- Table values assume an exterior wall dead load of 100 plf.
- **Table values assume that lateral support is provided at each support and continuously along the compression edge of the beam.**
- Multi-ply members may be substituted with solid section beams.

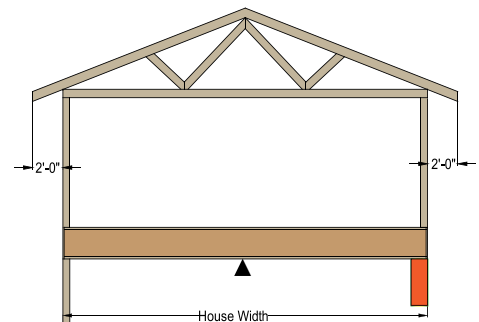

18 HEADER SPAN TABLES ROOF + TWO STOREY (CENTER BEARING)

VERSA-LAM® 2800Fb 2.0E (1 3/4")

Snow Load of 20 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/360

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	5' - 2"	5' - 11"	6' - 10"	7' - 9"	8' - 8"	9' - 11"	8' - 11"	10' - 3"	10' - 7"	12' - 1"	11' - 2"	12' - 9"	13' - 2"	15' - 1"	15' - 0"	17' - 2"	16' - 11"	19' - 4"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	2.0	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	2.0
24	4' - 11"	5' - 7"	6' - 6"	7' - 5"	8' - 3"	9' - 6"	8' - 6"	9' - 9"	10' - 1"	11' - 6"	10' - 8"	12' - 2"	12' - 6"	14' - 4"	14' - 4"	16' - 5"	16' - 2"	18' - 5"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	2.0	1.5	2.2	1.7
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	2.2
28	4' - 8"	5' - 5"	6' - 3"	7' - 1"	7' - 11"	9' - 1"	8' - 2"	9' - 4"	9' - 8"	11' - 1"	10' - 2"	11' - 8"	12' - 0"	13' - 9"	13' - 9"	15' - 9"	15' - 6"	17' - 8"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.2	1.7	2.5	1.9
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
32	4' - 6"	5' - 2"	6' - 0"	6' - 10"	7' - 8"	8' - 9"	7' - 10"	9' - 0"	9' - 4"	10' - 8"	9' - 10"	11' - 3"	11' - 3"	13' - 3"	13' - 3"	15' - 2"	14' - 11"	17' - 0"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.8	1.5	2.2	1.7	2.5	1.9	2.8	2.1
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
36	4' - 5"	5' - 0"	5' - 9"	6' - 7"	7' - 5"	8' - 5"	7' - 7"	8' - 8"	9' - 0"	10' - 3"	9' - 6"	10' - 10"	11' - 2"	12' - 10"	12' - 10"	14' - 8"	14' - 5"	16' - 6"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.6	1.5	1.9	1.5	2.0	1.5	2.3	1.8	2.7	2.0	3.0	2.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
40	4' - 3"	4' - 10"	5' - 7"	6' - 5"	7' - 2"	8' - 2"	7' - 4"	8' - 5"	8' - 9"	10' - 0"	9' - 2"	10' - 6"	10' - 10"	12' - 5"	12' - 5"	14' - 2"	14' - 0"	16' - 0"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.7	1.5	1.7	1.5	2.0	1.6	2.1	1.6	2.5	1.9	2.9	2.2	3.2	2.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5

Snow Load of 40 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/360


Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	4' - 11"	5' - 7"	6' - 6"	7' - 5"	8' - 3"	9' - 6"	8' - 6"	9' - 9"	10' - 1"	11' - 6"	10' - 8"	12' - 2"	12' - 6"	14' - 4"	14' - 4"	16' - 5"	16' - 2"	18' - 5"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.6	1.5	1.9	1.5	2.0	1.5	2.4	1.8	2.7	2.1	3.0	2.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
24	4' - 8"	5' - 4"	6' - 2"	7' - 1"	7' - 11"	9' - 0"	8' - 1"	9' - 3"	9' - 7"	11' - 0"	10' - 2"	11' - 7"	11' - 11"	13' - 8"	13' - 8"	15' - 7"	15' - 4"	17' - 7"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.8	1.5	1.8	1.5	2.2	1.7	2.3	1.8	2.7	2.1	3.1	2.3	3.4	2.6
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.8	1.5
28	4' - 6"	5' - 2"	5' - 11"	6' - 9"	7' - 7"	8' - 8"	7' - 9"	8' - 11"	9' - 2"	10' - 6"	9' - 8"	11' - 1"	11' - 5"	13' - 1"	13' - 1"	15' - 0"	14' - 9"	16' - 10"
End bearing_SPF Plate (in)	1.5	1.5	1.6	1.5	2.0	1.5	2.0	1.6	2.4	1.9	2.5	2.0	3.0	2.3	3.4	2.6	3.8	2.9
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	2.0	1.5
32	4' - 4"	4' - 11"	5' - 8"	6' - 6"	7' - 3"	8' - 4"	7' - 6"	8' - 7"	8' - 10"	10' - 2"	9' - 4"	10' - 8"	11' - 0"	12' - 7"	12' - 7"	14' - 5"	14' - 1"	16' - 3"
End bearing_SPF Plate (in)	1.5	1.5	1.7	1.5	2.2	1.7	2.2	1.7	2.7	2.0	2.8	2.1	3.3	2.5	3.8	2.9	4.2	3.2
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.9	1.5	2.1	1.7
36	4' - 2"	4' - 9"	5' - 6"	6' - 4"	7' - 0"	8' - 1"	7' - 3"	8' - 3"	8' - 7"	9' - 10"	9' - 0"	10' - 4"	10' - 7"	12' - 2"	12' - 0"	13' - 1"	13' - 5"	15' - 8"
End bearing_SPF Plate (in)	1.5	1.5	1.9	1.5	2.4	1.8	2.4	1.9	2.9	2.2	3.0	2.3	3.5	2.7	4.0	3.1	4.5	3.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	2.0	1.6	2.3	1.8
40	4' - 0"	4' - 8"	5' - 4"	6' - 1"	6' - 10"	7' - 10"	7' - 0"	8' - 0"	8' - 2"	9' - 6"	8' - 8"	10' - 0"	10' - 1"	11' - 10"	11' - 5"	13' - 6"	12' - 10"	15' - 2"
End bearing_SPF Plate (in)	1.5	1.5	2.0	1.6	2.6	2.0	2.6	2.0	3.1	2.4	3.2	2.5	3.8	2.9	4.3	3.4	4.7	3.8
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	1.9	1.5	2.2	1.7	2.4	1.9

Snow Load of 60 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/360

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	4' - 8"	5' - 5"	6' - 3"	7' - 1"	7' - 11"	9' - 1"	8' - 2"	9' - 4"	9' - 8"	11' - 1"	10' - 2"	11' - 8"	12' - 0"	13' - 9"	13' - 9"	15' - 9"	15' - 6"	17' - 8"
End bearing_SPF Plate (in)	1.5	1.5	1.6	1.5	2.1	1.6	2.1	1.6	2.5	1.9	2.6	2.0	3.1	2.4	3.5	2.7	4.0	3.0
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.8	1.5	2.0	1.6
24	4' - 6"	5' - 2"	5' - 11"	6' - 9"	7' - 7"	8' - 8"	7' - 9"	8' - 11"	9' - 2"	10' - 6"	9' - 8"	11' - 1"	11' - 5"	13' - 1"	13' - 1"	15' - 0"	14' - 8"	16' - 10"
End bearing_SPF Plate (in)	1.5	1.5	1.9	1.5	2.4	1.8	2.4	1.9	2.8	2.2	3.0	2.3	3.5	2.7	4.0	3.1	4.5	3.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	2.1	1.6	2.3	1.8
28	4' - 3"	4' - 11"	5' - 8"	6' - 6"	7' - 3"	8' - 3"	7' - 5"	8' - 6"	8' - 10"	10' - 1"	9' - 4"	10' - 8"	10' - 10"	12' - 7"	12' - 4"	14' - 4"	13' - 9"	16' - 2"
End bearing_SPF Plate (in)	1.6	1.5	2.1	1.6	2.6	2.0	2.7	2.1	3.2	2.4	3.4	2.6	3.9	3.0	4.4	3.4	4.9	3.9
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.3	1.8	2.5	2.0
32	4' - 2"	4' - 9"	5' - 5"	6' - 3"	6' - 11"	8' - 0"	7' - 1"	8' - 2"	8' - 4"	9' - 8"	8' - 9"	10' - 3"	10' - 3"	12' - 1"	11' - 8"	13' - 10"	13' - 0"	15' - 6"
End bearing_SPF Plate (in)	1.7	1.5	2.3	1.7	2.9	2.2	2.9	2.3	3.4	2.7	3.6	2.8	4.2	3.3	4.8	3.8	5.3	4.2
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	1.8	1.5	2.1	1.7	2.4	1.9	2.7	2.2
36	4' - 0"	4' - 7"	5' - 3"	6' - 0"	6' - 7"	7' - 8"	6' - 9"	7' - 11"	7' - 11"	9' - 5"	8' - 4"	9' - 11"	9' - 9"	11' - 8"	11' - 1"	13' - 4"	12' - 4"	15' - 0"
End bearing_SPF Plate (in)	1.9	1.5	2.4	1.9	3.1	2.4	3.1	2.5	3.7	2.9	3.9	3.1	4.5	3.6	5.1	4.1	5.7	4.6
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.6	1.5	1.9	1.5	2.0	1.6	2.3	1.8	2.6	2.1	2.9	2.4
40	3' - 10"	4' - 5"	5' - 0"	5' - 10"	6' - 3"	7' - 6"	6' - 5"	7' - 8"	7' - 7"	9' - 1"	7' - 11"	9' - 7"	9' - 4"	11' - 4"	10' - 7"	12' - 11"	11' - 10"	14' - 5"
End bearing_SPF Plate (in)	2.0	1.6	2.6	2.0	3.2	2.6	3.3	2.6	3.9	3.1	4.1	3.3	4.8	3.9	5.4	4.4	6.0	4.9
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.7	1.5	1.7	1.5	2.0	1.6	2.1	1.7	2.4	2.0	2.7	2.3	3.1	2.5

NOTES:

- This table has been established using a Live Load deflection equal to L / 360 and a Total Load deflection limit equal to L / 240.
- This table assumes a maximum roof slope of 12/12 and a 24" soffit.
- This table assumes uniform loads and simple span headers.
- Table values are based on SPF specified compression strength perpendicular to grain for plate of 769 psi.
- Minimum bearing lengths required are based on a minimum bearing width equal to or greater than the width of the supported beam.
- Span is measured center to center of the supports.
- Table values assume an exterior wall dead load of 100 plf.
- **Table values assume that lateral support is provided at each support and continuously along the compression edge of the beam.**
- Multi-ply members may be substituted with solid section beams.

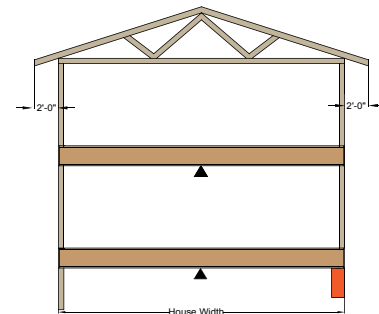

VERSA-LAM® 2800Fb 2.0E (1 3/4")

Snow Load of 20 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/480

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	5' - 2"	5' - 11"	6' - 10"	7' - 9"	8' - 8"	9' - 11"	8' - 11"	10' - 3"	10' - 7"	12' - 1"	11' - 2"	12' - 9"	13' - 2"	15' - 1"	15' - 0"	17' - 2"	16' - 11"	19' - 4"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	2.0	1.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
24	4' - 11"	5' - 7"	6' - 6"	7' - 5"	8' - 3"	9' - 6"	8' - 6"	9' - 9"	10' - 1"	11' - 6"	10' - 8"	12' - 2"	12' - 6"	14' - 4"	14' - 4"	16' - 5"	16' - 2"	18' - 5"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.5	2.0	1.5	2.2	1.7
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
28	4' - 8"	5' - 5"	6' - 3"	7' - 1"	7' - 11"	9' - 1"	8' - 2"	9' - 4"	9' - 8"	11' - 1"	10' - 2"	11' - 8"	12' - 0"	13' - 9"	13' - 9"	15' - 9"	15' - 6"	17' - 8"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.7	1.5	2.0	1.5	2.2	1.7	2.5	1.9
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
32	4' - 6"	5' - 2"	6' - 0"	6' - 10"	7' - 8"	8' - 9"	7' - 10"	9' - 0"	9' - 4"	10' - 8"	9' - 10"	11' - 3"	11' - 7"	13' - 3"	13' - 3"	15' - 2"	14' - 11"	17' - 0"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.8	1.5	2.2	1.7	2.5	1.9	2.8	2.1
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
36	4' - 5"	5' - 0"	5' - 9"	6' - 7"	7' - 5"	8' - 5"	7' - 7"	8' - 8"	9' - 0"	10' - 3"	9' - 6"	10' - 10"	11' - 2"	12' - 10"	12' - 10"	14' - 8"	14' - 5"	16' - 6"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.6	1.5	1.9	1.5	2.0	1.5	2.3	1.8	2.7	2.0	3.0	2.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
40	4' - 3"	4' - 10"	5' - 7"	6' - 5"	7' - 2"	8' - 2"	7' - 4"	8' - 5"	8' - 9"	10' - 0"	9' - 2"	10' - 6"	10' - 10"	12' - 5"	12' - 5"	14' - 2"	14' - 0"	16' - 0"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.7	1.5	1.7	1.5	2.0	1.6	2.1	1.6	2.5	1.9	2.9	2.2	3.2	2.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5

Snow Load of 40 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/480


Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	4' - 11"	5' - 7"	6' - 6"	7' - 5"	8' - 3"	9' - 6"	8' - 6"	9' - 9"	10' - 1"	11' - 6"	10' - 8"	12' - 2"	12' - 6"	14' - 4"	14' - 4"	16' - 5"	16' - 2"	18' - 5"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.6	1.5	1.6	1.5	1.9	1.5	2.0	1.5	2.4	1.8	2.7	2.1	3.0	2.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
24	4' - 8"	5' - 4"	6' - 2"	7' - 1"	7' - 10"	9' - 0"	8' - 1"	9' - 3"	9' - 7"	10' - 11"	10' - 1"	11' - 7"	11' - 11"	13' - 8"	13' - 7"	15' - 7"	15' - 4"	17' - 7"
End bearing_SPF Plate (in)	1.5	1.5	1.5	1.5	1.8	1.5	1.8	1.5	2.2	1.7	2.3	1.7	2.7	2.1	3.0	2.3	3.4	2.6
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
28	4' - 5"	5' - 1"	5' - 10"	6' - 9"	7' - 6"	8' - 7"	7' - 8"	8' - 10"	9' - 1"	10' - 5"	9' - 8"	11' - 0"	11' - 4"	13' - 0"	13' - 0"	14' - 10"	14' - 7"	16' - 9"
End bearing_SPF Plate (in)	1.5	1.5	1.6	1.5	2.0	1.5	2.0	1.6	2.4	1.8	2.5	1.9	3.0	2.3	3.4	2.6	3.8	2.9
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
32	4' - 3"	4' - 10"	5' - 7"	6' - 5"	7' - 2"	8' - 3"	7' - 5"	8' - 5"	8' - 9"	10' - 0"	9' - 3"	10' - 7"	10' - 11"	12' - 6"	12' - 5"	14' - 3"	14' - 0"	16' - 1"
End bearing_SPF Plate (in)	1.5	1.5	1.7	1.5	2.2	1.7	2.2	1.7	2.6	2.0	2.8	2.1	3.3	2.5	3.7	2.8	4.2	3.2
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6
36	4' - 1"	4' - 8"	5' - 5"	6' - 2"	6' - 11"	7' - 11"	7' - 4"	8' - 2"	8' - 5"	9' - 8"	8' - 11"	10' - 2"	10' - 6"	12' - 0"	12' - 0"	13' - 9"	13' - 5"	15' - 6"
End bearing_SPF Plate (in)	1.5	1.5	1.8	1.5	2.3	1.8	2.4	1.8	2.8	2.2	3.0	2.3	3.5	2.7	4.0	3.1	4.5	3.5
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.8
40	4' - 0"	4' - 6"	5' - 3"	6' - 0"	6' - 8"	7' - 8"	6' - 10"	7' - 10"	8' - 2"	9' - 4"	8' - 7"	9' - 10"	10' - 1"	11' - 7"	11' - 5"	13' - 3"	12' - 10"	14' - 11"
End bearing_SPF Plate (in)	1.5	1.5	2.0	1.5	2.5	1.9	2.6	2.0	3.0	2.3	3.2	2.5	3.8	2.9	4.3	3.3	4.7	3.7
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.6	1.5	1.9	1.5	2.2	1.7	2.4	1.9

Snow Load of 60 psf Roof Dead Load of 15 psf Floor Live Load of 40 psf Floor Dead Load of 15 psf L/480

Beam Depth	5.5"		7.25"		9.25"		9.5"		11.25"		11.875"		14"		16"		18"	
	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply	2 ply	3 ply
20	4' - 6"	5' - 2"	6' - 0"	6' - 10"	7' - 8"	8' - 9"	7' - 10"	9' - 0"	9' - 4"	10' - 8"	9' - 10"	11' - 3"	11' - 7"	13' - 4"	13' - 3"	15' - 3"	14' - 11"	17' - 2"
End bearing_SPF Plate (in)	1.5	1.5	1.6	1.5	2.0	1.5	2.0	1.6	2.4	1.9	2.5	2.0	3.0	2.3	3.4	2.6	3.8	2.9
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
24	4' - 4"	4' - 11"	5' - 8"	6' - 6"	7' - 3"	8' - 4"	7' - 5"	8' - 6"	8' - 10"	10' - 1"	9' - 4"	10' - 8"	11' - 0"	12' - 7"	12' - 7"	14' - 5"	14' - 2"	16' - 3"
End bearing_SPF Plate (in)	1.5	1.5	1.8	1.5	2.3	1.7	2.3	1.8	2.7	2.1	2.9	2.2	3.4	2.6	3.9	3.0	4.4	3.3
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7
28	4' - 1"	4' - 8"	5' - 5"	6' - 2"	6' - 11"	7' - 11"	7' - 4"	8' - 2"	8' - 5"	9' - 8"	8' - 11"	10' - 2"	10' - 6"	12' - 0"	12' - 0"	13' - 9"	13' - 6"	15' - 6"
End bearing_SPF Plate (in)	1.5	1.5	2.0	1.5	2.5	1.9	2.6	2.0	3.0	2.3	3.2	2.5	3.8	2.9	4.3	3.3	4.8	3.7
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.6	1.5	1.9	1.5	2.2	1.7	2.5	1.9
32	3' - 11"	4' - 6"	5' - 2"	5' - 11"	6' - 8"	7' - 7"	6' - 10"	7' - 10"	8' - 1"	9' - 3"	8' - 6"	9' - 9"	10' - 1"	11' - 6"	11' - 6"	13' - 2"	12' - 11"	14' - 10"
End bearing_SPF Plate (in)	1.7	1.5	2.2	1.7	2.8	2.1	2.8	2.2	3.3	2.6	3.5	2.7	4.1	3.2	4.7	3.6	5.3	4.1
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.7	1.5	1.8	1.5	2.1	1.6	2.4	1.8	2.7	2.1
36	3' - 9"	4' - 4"	5' - 0"	5' - 9"	6' - 5"	7' - 4"	6' - 7"	7' - 6"	7' - 9"	8' - 11"	8' - 3"	9' - 5"	9' - 8"	11' - 1"	11' - 1"	12' - 8"	12' - 4"	14' - 4"
End bearing_SPF Plate (in)	1.8	1.5	2.3	1.8	3.0	2.3	3.1	2.3	3.6	2.8	3.8	2.9	4.5	3.4	5.1	3.9	5.7	4.4
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.5	1.8	1.5	1.9	1.5	2.3	1.8	2.6	2.0	2.9	2.2
40	3' - 8"	4' - 2"	4' - 10"	5' - 7"	6' - 2"	7' - 1"	6' - 4"	7' - 3"	7' - 6"	8' - 8"	7' - 11"	9' - 1"	9' - 4"	10' - 9"	10' - 7"	12' - 4"	11' - 10"	13' - 10"
End bearing_SPF Plate (in)	1.9	1.5	2.5	1.9	3.2	2.5	3.3	2.5	3.9	3.0	4.1	3.1	4.8	3.7	5.4	4.2	6.0	4.7
End bearing_Member (in)	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	2.0	1.5	2.1	1.6	2.4	1.9	2.7	2.1	3.1	2.4

NOTES:

- This table has been established using a Live Load deflection equal to L / 480 and a Total Load deflection limit equal to L / 240.
- This table assumes a maximum roof slope of 12/12 and a 24" soffit.
- This table assumes uniform loads and simple span headers.
- Table values are based on SPF specified compression strength perpendicular to grain for plate of 769 psi.
- Minimum bearing lengths required are based on a minimum bearing width equal to or greater than the width of the supported beam.
- Span is measured center to center of the supports.
- Table values assume an exterior wall dead load of 100 plf.
- **Table values assume that lateral support is provided at each support and continuously along the compression edge of the beam.**
- Multi-ply members may be substituted with solid section beams.

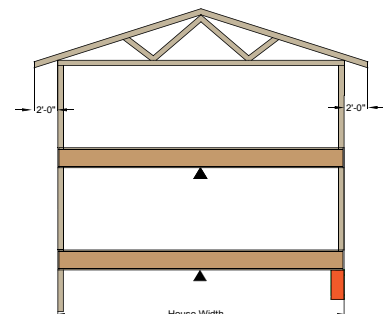


VERSA-LAM® & VERSA-RIM® Products

Nail Size	Nailing Parallel to Glue Lines (Narrow Face) ⁽¹⁾								Nailing Perpendicular to Glue Lines (Wide Face)	
	VERSA-RIM® 1 1/16"		VERSA-LAM® 1800 1.4 1 5/16"		VERSA-LAM® 1 3/4"		VERSA-LAM® 3 1/2" & Wider		All Products	
	O.C. [inches]	End [inches]	O.C. [inches]	End [inches]	O.C. [inches]	End [inches]	O.C. [inches]	End [inches]	O.C. [inches]	End [inches]
2 1/2" (8d) Box	3	1 1/2	3	1 1/2	2	1	2	1/2	2	1/2
2 1/2" (8d) Common	4	3	3	2	3	2	2	1	2	1
3" (10d) & 3 1/4" (12d) Box	4	3	3	2	3	2	2	1	2	1
3 1/2" (16d) Box	4	3	3	2	3	2	2	1	2	1
3" (10d) & 3 1/4" (12d) common	6	4	4	3	4	3	2	2	2	2
3 1/2" (16d) Sinker	6	4	4	3	4	3	2	2	2	2
3 1/2" (16d) Common	6	4	6	4	6	3	2	2	2	2

NOTES:

- For 1 1/4" thickness and greater, 2 rows of nails (such as for a metal strap) are allowed (use 1/2" minimum offset between rows and stagger nails).
- Offset and stagger nail rows from floor sheathing and wall sole plate.

Nailing Parallel to Glue Lines (Narrow Face)



Nailing Perpendicular to Glue Lines (Wide Face)

SCARF CUT

VERSA-LAM® 2800Fb 2.0E (3 1/2")

Maximum Factored Reaction for 3 1/2" Wood Plate										
Depth (in)	Scarf Cut Slope (___/12)	Heel Height - dh								
		4 1/2"	5"	5 1/2"	6"	6 1/2"	7"	7 1/2"	8"	10"
7 1/4"	3	6 547	7 263	7 595	7 595					
	6	7 595								
9 1/4"	3	7 156	7 595	7 595	7 595	7 595	7 595	7 595		
	6	7 595	7 595	7 595	7 595	7 595	7 595			
	9	7 595	7 595	7 595	7 595					
	12	7 595	7 595	7 595						
9 1/2"	3	7 156	7 595	7 595	7 595	7 595	7 595	7 595		
	6	7 595	7 595	7 595	7 595	7 595	7 595			
	9	7 595	7 595	7 595	7 595					
	12	7 595	7 595	7 595						
11 1/4"	3				7 595	7 595	7 595	7 595	7 595	7 595
	6		7 595	7 595	7 595	7 595	7 595	7 595		
	9	7 595	7 595	7 595	7 595	7 595	7 595	7 595		
	12	7 595	7 595	7 595	7 595					
11 1/8"	3					7 595	7 595	7 595	7 595	7 595
	6			7 595	7 595	7 595	7 595	7 595	7 595	7 595
	9	7 595	7 595	7 595	7 595	7 595	7 595	7 595		
	12	7 595	7 595	7 595	7 595	7 595	7 595	7 595		
14"	3								7 595	7 595
	6						7 595	7 595	7 595	7 595
	9				7 595	7 595	7 595	7 595	7 595	7 595
	12		7 595	7 595	7 595	7 595	7 595	7 595	7 595	
16"	3									7 595
	6								7 595	7 595
	9						7 595	7 595	7 595	7 595
	12					7 595	7 595	7 595	7 595	7 595
18"	3									7 595
	6									7 595
	9									7 595
	12						7 595	7 595	7 595	7 595
20"	9									7 595
	12									7 595


Maximum Factored Reaction for 5 1/4" Wood Plate										
Depth (in)	Scarf Cut Slope (___/12)	Heel Height - dh								
		4 1/2"	5"	5 1/2"	6"	6 1/2"	7"	7 1/2"	8"	10"
7 1/4"	3	7 098	8 152	8 694						
	6	8 825								
9 1/4"	3	7 080	7 689	8 298	8 907	9 978	10 751	11 161	11 267	
	6	9 723	10 423	10 887	11 156	11 262				
	9	11 139	11 249							
	12	7 080	7 689	8 298	8 907	9 795	10 745	11 310	11 393	
9 1/2"	3	7 080	7 689	8 298	8 907	9 795	10 745	11 310	11 393	
	6	9 643	10 448	11 004	11 355	11 393				
	9	11 354	11 393							
	12	7 080	7 689	8 298	8 907	9 516	10 125	10 734	11 393	
11 1/4"	3	8 678	9 504	10 775	11 393	11 393	11 393	11 393	11 393	
	6	11 393	11 393	11 393	11 393	11 393	11 393			
	9	11 393	11 393	11 393	11 393	11 393	11 393			
	12	11 393	11 393	11 393	11 393	11 393	11 393			
11 1/8"	3	7 080	7 689	8 298	8 907	9 516	10 125	10 734	11 343	11 393
	6	8 678	9 287	10 248	11 393	11 393	11 393	11 393	11 393	11 393
	9	11 393	11 393	11 393	11 393	11 393	11 393	11 393	11 393	11 393
	12	11 393	11 393	11 393	11 393	11 393	11 393			
14"	3	7 080	7 689	8 298	8 907	9 516	10 125	10 734	11 343	11 393
	6	8 678	9 287	9 896	10 505	11 114	11 393	11 393	11 393	11 393
	9	11 097	11 393	11 393	11 393	11 393	11 393	11 393	11 393	11 393
	12	11 393	11 393	11 393	11 393	11 393	11 393	11 393	11 393	11 393
16"	3	7 080	7 689	8 298	8 907	9 516	10 125	10 734	11 343	11 393
	6	8 678	9 287	9 896	10 505	11 114	11 393	11 393	11 393	11 393
	9	10 277	10 886	11 393	11 393	11 393	11 393	11 393	11 393	11 393
	12	11 393	11 393	11 393	11 393	11 393	11 393	11 393	11 393	11 393
18"	3	7 080	7 689	8 298	8 907	9 516	10 125	10 734	11 343	11 393
	6	8 678	9 287	9 896	10 505	11 114	11 393	11 393	11 393	11 393
	9	10 277	10 886	11 393	11 393	11 393	11 393	11 393	11 393	11 393
	12	11 393	11 393	11 393	11 393	11 393	11 393	11 393	11 393	11 393
20"	3	7 080	7 689	8 298	8 907	9 516	10 125	10 734	11 343	11 393
	6	8 678	9 287	9 896	10 505	11 114	11 393	11 393	11 393	11 393
	9	10 277	10 886	11 393	11 393	11 393	11 393	11 393	11 393	11 393
	12	11 393	11 393	11 393	11 393	11 393	11 393	11 393	11 393	11 393

NOTES:

- Tabulated values based on the factored bearing resistance of 620 psi and a beam width of 3 1/2".
- Downward loading conditions only. For uplift loading contact Boise Cascade EWP representative.
- K_D = 1.0
- Holes or concentrated loads are not allowed within the taper cut.
- The scarf cut length should not exceed (2/3) Span, where the scarf cut length (e + bl) = (d - dh) * A.

Scarf Cut Slope (___/12)	A
3	4.00
6	2.00
9	1.33
12	1.00

- For 1 1/4", 5/4", and 7" beams, multiply by 0.5, 1.5, and 2.0, respectively.

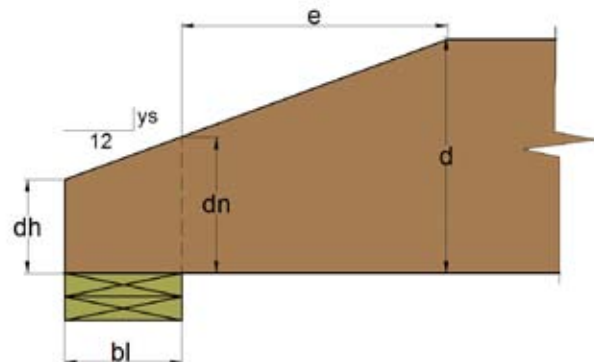

VERSA-LAM® 2800Fb 2.0E (3½")


Maximum Factored Reaction for 3½" Column										
Depth (in)	Scarf Cut Slope (°/12)	Heel Height - dh								
		4½"	5"	5½"	6"	6½"	7"	7½"	8"	10"
7¼	3	6 547	7 263	8 245	8 731					
	6	8 441								
9¼	3	6 547	7 156	7 765	8 374	8 983	10 097	10 821	11 189	
	6	7 759	9 011	9 923	10 559	10 971	11 197			
	9	10 237	10 704	11 014	11 193					
	12	11 029	11 186	11 258						
9½	3	6 547	7 156	7 765	8 374	8 983	9 937	10 835	11 357	
	6	7 613	8 842	9 870	10 608	11 110	11 414	11 555		
	9	10 285	10 822	11 193	11 427	11 546				
	12	11 228	11 428	11 537						
11¼	3	6 547	7 156	7 765	8 374	8 983	9 592	10 201	10 810	13 640
	6	7 613	8 222	8 831	9 852	11 045	11 963	12 649	13 140	
	9	9 824	10 904	11 751	12 405	12 899	13 257	13 500	13 643	
	12	12 094	12 619	13 017	13 310	13 512		13 696		
11¾	3	6 547	7 156	7 765	8 374	8 983	9 592	10 201	10 810	14 016
	6	7 613	8 222	8 831	9 440	10 584	11 745	12 649	13 336	14 461
	9	9 321	10 617	11 653	12 475	13 118	13 610	13 973	14 225	
	12	12 178	12 832	13 345	13 741	14 036	14 244	14 379	14 449	
14	3	6 547	7 156	7 765	8 374	8 983	9 592	10 201	10 810	13 246
	6	7 613	8 222	8 831	9 440	10 049	10 658	11 267	12 539	14 945
	9	8 678	9 287	10 153	11 612	12 822	13 822	14 644	14 945	14 945
	12	11 571	12 717	13 669	14 456	14 945	14 945	14 945	14 945	14 945
16	3	6 547	7 156	7 765	8 374	8 983	9 592	10 201	10 810	13 246
	6	7 613	8 222	8 831	9 440	10 049	10 658	11 267	11 876	14 945
	9	8 678	9 287	9 896	10 505	11 114	12 631	13 952	14 945	14 945
	12	9 744	11 428	12 857	14 071	14 945	14 945	14 945	14 945	14 945
18	3	6 547	7 156	7 765	8 374	8 983	9 592	10 201	10 810	13 246
	6	7 613	8 222	8 831	9 440	10 049	10 658	11 267	11 876	14 312
	9	8 678	9 287	9 896	10 505	11 114	11 723	12 332	13 611	14 945
	12	9 744	10 353	10 962	12 661	14 129	14 945	14 945	14 945	14 945
20	3	6 547	7 156	7 765	8 374	8 983	9 592	10 201	10 810	13 246
	6	7 613	8 222	8 831	9 440	10 049	10 658	11 267	11 876	14 312
	9	8 678	9 287	9 896	10 505	11 114	11 723	12 332	12 941	14 945
	12	9 744	10 353	10 962	11 571	12 180	13 891	14 945	14 945	14 945

NOTES:

- Tabulated values based on the factored bearing resistance of 620 psi and a beam width of 3½".
- Downward loading conditions only. For uplift loading contact Boise Cascade EWP representative.
- $K_b = 1.0$
- Holes or concentrated loads are not allowed within the taper cut.
- The scarf cut length should not exceed (½) Span, where the scarf cut length $(e + bl) = (d - dh) * A$.

Scarf Cut Slope (°/12)	A
3	4.00
6	2.00
9	1.33
12	1.00

- For 1¼", 5¼", and 7" beams, multiply by 0.5, 1.5, and 2.0, respectively.

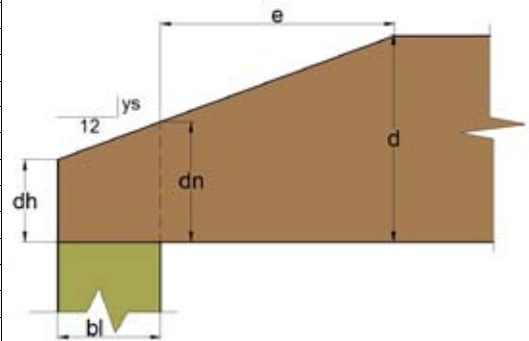

MINIMUM BEARING LENGTH PER BEARING WIDTH

VERSA-LAM® Minimum End bearing length per bearing width (in)				
Total Factored Reaction (lb)	Bearing width (in)			
	1¼	3½	5¼	7
2 000	1½	1½	1½	1½
4 000	2	1½	1½	1½
6 000	3	1½	1½	1½
8 000	3¾	2	1½	1½
10 000	4¾	2½	1¾	1½
12 000	5¾	3	2	1½
14 000	6¾	3½	2¼	1¾
16 000	7½	3¾	2½	2
18 000		4¼	3	2¼
20 000		4¾	3¼	2½
22 000		5¼	3½	2¾
24 000		5¾	3¾	3
26 000		6¼	4¼	3¼
28 000		6¾	4½	3½
30 000		7¼	4¾	3¾
32 000		7½	5	3¾
34 000			5½	4
36 000			5¾	4¼
38 000			6	4½
40 000			6¼	4¾

VERSA-LAM® Minimum Intermediate bearing length per bearing width (in)				
Total Factored Reaction (lb)	Bearing width (in)			
	1¼	3½	5¼	7
4 000	3½	3½	3½	3½
8 000	3¾	3½	3½	3½
12 000	5¼	3½	3½	3½
16 000	7½	3¾	3½	3½
20 000	9½	4¾	3½	3½
24 000	11¼	5¼	3¾	3½
28 000	13¼	6¼	4½	3½
32 000	15	7½	5	3¾
36 000		8½	5¾	4¼
40 000		9½	6¼	4¾
44 000		10½	7	5¼
48 000		11¼	7½	5¾
52 000		12¼	8¼	6¼
56 000		13¼	8¾	6¾
60 000		14¼	9½	7¼
64 000		15	10	7½
68 000			10¾	8
72 000			11¼	8½
76 000			12	9
80 000			12½	9½

NOTES:

- Lateral support at bearings should be provided to prevent lateral displacement or rotation.
- Member bearing lengths are based on a VERSA-LAM® Factored Bearing Resistance of 1220 psi.

Rows	Depth Range	Spacing				
			3 1/2" (2 plies)	5 1/4" (3 plies)	5 1/2" (2 plies)	7" (3 plies)
			Maximum Factored Uniform Load (PLF) Applied to Either Outside Member			
3.5" Common Wire Nails (16d)						
2	7 1/4" to 11 1/8"	24"	434	325	325	289
		12"	867	650	650	578
		6"	1734	1301	1301	1156
3	11 1/8" to 14"	24"	650	488	488	434
		12"	1301	976	976	867
		6"	2602	1951	1951	1734
4	14" to 24"	24"	867	650	650	578
		12"	1734	1301	1301	1156
		6"	3469	2602	2602	2312

Rows	Depth Range	Spacing				
			3 1/2" (2 plies)	5 1/4" (3 plies)	7" (2 plies)	7" (4 plies)
			Maximum Factored Uniform Load (PLF) Applied to Either Outside Member			
			SDW22338	SDW22500	SDW22634	SDW22634
2	7 1/4" to 11 1/8"	24"	680	623	1140	553
		12"	1360	1245	2280	1107
		6"	2720	2490	4560	2213
3	11 1/8" to 14"	24"	1020	934	1710	830
		12"	2040	1868	3420	1660
		6"	4080	3735	6840	3320
4	14" to 24"	24"	1360	1245	2280	1107
		12"	2720	2490	4560	2213
		6"	5440	4980	9120	4427

Rows	Depth Range	Spacing				
			3 1/2" (2 plies)	5 1/4" (3 plies)	7" (2 plies)	7" (4 plies)
			Maximum Factored Uniform Load (PLF) Applied to Either Outside Member			
			SDS 1/4"x3.5"	SDS 1/4"x3.5"	SDS 1/4"x6"	SDS 1/4"x6"
2	7 1/4" to 11 1/8"	24"	610	458	610	520
		12"	1220	915	1220	1040
		6"	2440	1830	2440	2080
3	11 1/8" to 14"	24"	915	686	915	780
		12"	1830	1373	1830	1560
		6"	3660	2745	3660	3120
4	14" to 24"	24"	1220	915	1220	1040
		12"	2440	1830	2440	2080
		6"	4880	3660	4880	4160

Rows	Depth Range	Spacing				
			3 1/2" (2 plies)	5 1/4" (3 plies)	7" (2 plies)	7" (4 plies)
			Maximum Factored Uniform Load (PLF) Applied to Either Outside Member			
			3 3/8" TrussLok	5" TrussLok	6 3/4" TrussLok	6 3/4" TrussLok
2	7 1/4" to 11 1/8"	24"	864	675	849	600
		16"	1 296	1 013	1 274	900
		12"	1 728	1 350	1 698	1 200
3	11 1/8" to 14"	24"	1 296	1 013	1 274	900
		16"	1 944	1 519	1 910	1 350
		12"	2 592	2 025	2 547	2 025

Rows	Depth Range	Spacing						
			3 1/2" (2 plies)	5 1/4" (3 plies)	5 1/4" (2 plies)	7" (3 plies)	7" (2 plies)	7" (4 plies)
			Maximum Factored Uniform Load (PLF) Applied to Either Outside Member					
			1/2" Bolts					
2	7 1/4" to 11 1/8"	12"	1560	1170	1755	1560	3120	1040
		6"	3120	2340	3510	3120	6240	2080
3	11 1/8" to 14"	12"	2340	1755	2632	2340	4680	1560
		6"	4680	3510	5265	4680	9360	3120

NOTES


- Design values apply to common bolts that conform to ASTM A307 Grades A&B, SAE J429 Grades 2 or higher. A washer not less than a standard cut washer shall be between the wood and the bolt head and between the wood and the nut. The minimum edge distance for SDS/TrussLok screws and bolts shall be 2". The minimum end distance for SDS/TrussLok screws and bolts shall be 4", except for SDW screws where the end distance should not be less than 6". Bolt holes shall not be greater than 1/16 of the bolt diameter.
- When 3 1/2" sinker nails (16d) are used, multiply the maximum factored uniform load for the 3.5" common wire nails by 0.87 factor.
- When 3 1/4" pneumatic gun nails 0.122" diameter (10d) are used, multiply the maximum factored uniform load for the 3.5" common wire nails by 0.61 factor.
- The nail schedules shown apply to both sides of a 3-member beam.
- 4-ply beams must be loaded from both sides. Lesser side shall be no less than 25% of the opposite side.
- Beams wider than 7" must be designed by the professional engineer of record.
- An equivalent specific gravity of 0.5 may be used when designing specific connections with VERSA-LAM®. Connection design is based on CSA O86-09.
- Refer to current technical literature from FastenMaster TrussLok and Simpson Strong-Tie to confirm information herein has not been superseded.
- Other fasteners may also be used to connect multiple VERSA-LAM® BEAMS. Contact Boise Cascade EWP Engineering for further information.

VERSA-LAM® 2800 2.0E (1 1/4")							
Maximum Factored Point Load Applied to Either Outside Member (lbs)							
Connector Type	Number of Connectors	Min. Beam Depth (in)	Max. Beam Depth (in)	2-ply	3-ply	4-ply	Detail
3 1/2" (16d) Common Wire Nail (0.160" x 3 1/2")	4	7 1/4	18	1 734	1 301	-	Detail A
	8	7 1/4	18	3 469	2 602	-	Detail B
	12	9 1/4	18	5 203	3 902	-	Detail C
	18	9 1/4	18	7 805	5 853	-	Detail D
	22	11 1/8	18	9 539	7 154	-	Detail E
SDW 22338	8	7 1/4	18	5 440	-	-	Detail F
	10	9 1/4	18	6 800	-	-	Detail G
	12	9 1/4	18	8 160	-	-	Detail H
SDW 22500	8	7 1/4	18	-	4 980	-	Detail F
	10	9 1/4	18	-	6 225	-	Detail G
	12	9 1/4	18	-	7 470	-	Detail H
SDW 22634	8	7 1/4	18	-	-	4 427	Detail F
	10	9 1/4	18	-	-	5 533	Detail G
	12	9 1/4	18	-	-	6 640	Detail H
SDS 1/4 X 6*	4	7 1/4	18	-	-	2 080	Detail I
	8	7 1/4	18	-	-	4 160	Detail J
	12	9 1/4	18	-	-	6 240	Detail K
	16	11 1/8	18	-	-	8 320	Detail L

*Fasteners on both sides

NOTES

- When 3/4" sinker nails (16d) are used, multiply the maximum factored side load for the 3.5" common wire nails by 0.87 factor.
- When 3/4" pneumatic gun nails 0.122" diameter (10d) are used, multiply the maximum factored side load for the 3.5" common wire nails by 0.61 factor.
- 3-ply members must be fastened on both sides.
- An equivalent specific gravity of 0.5 may be used when designing specific connections with VERSA-LAM®. Connection design is based on CSA O86-09.
- FastenMaster TrussLok and USP WS screws may also be used to connect multiple VERSA-LAM® BEAMS. Contact Boise Cascade EWP Engineering for further information.

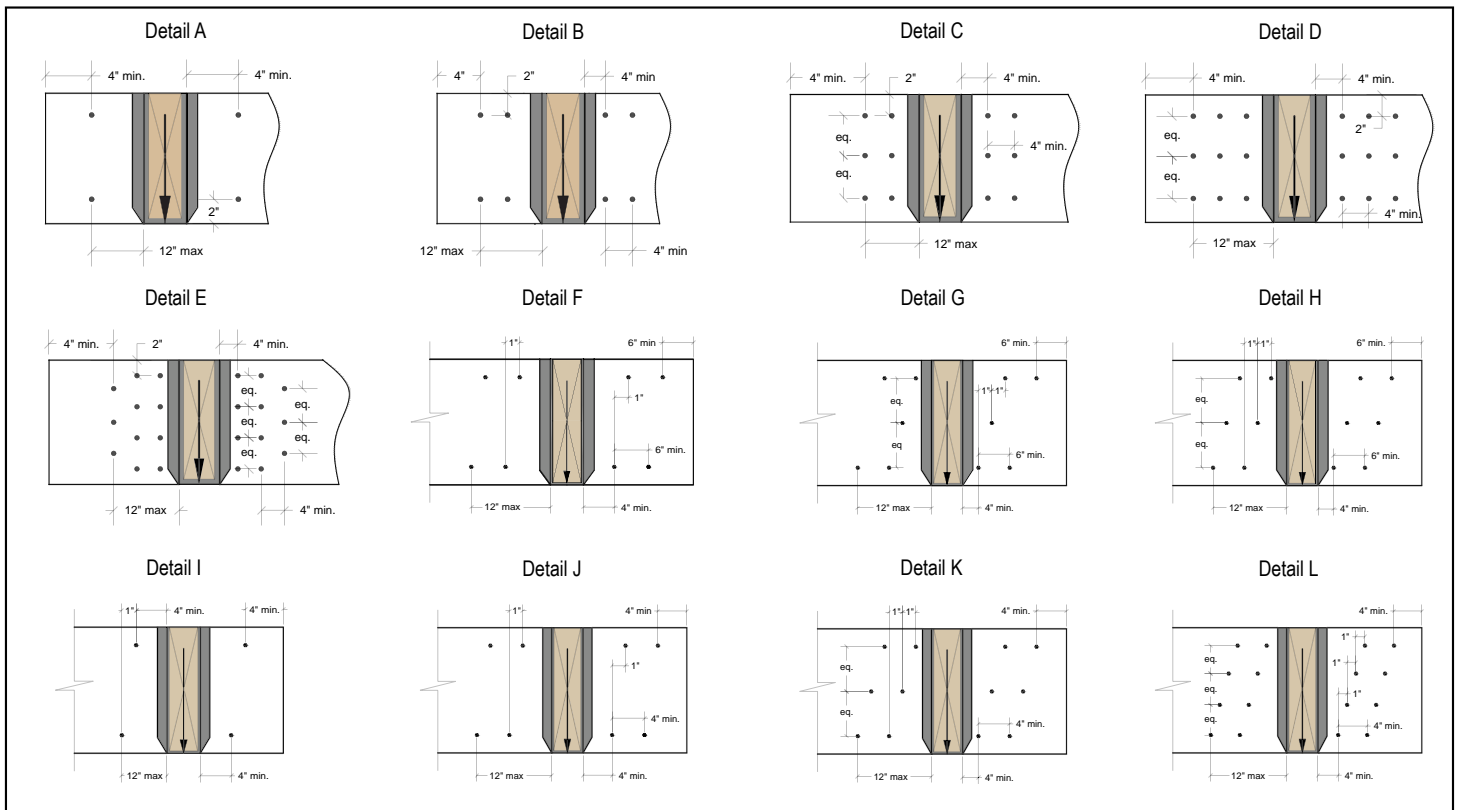

MULTIPLE BEAM CONNECTIONS – TOP LOADS

VERSA-LAM® 2800Fb 2.0E (1 1/4")				
Depth (in)	Number of plies			
	2	3	4	
5 1/2	2 rows of 16d Common Wire Nails at 12" o.c.	2 rows of 16d Common Wire Nails at 12" o.c.	N/A	
7 1/4 to 11 1/8	2 rows of 16d Common Wire Nails at 12" o.c.	2 rows of 16d Common Wire Nails at 12" o.c.	2 rows of 1/2" Bolts at 24" o.c.	2 rows of SDS 1/4 x 6 screws at 24" o.c. (both sides)
14 to 18	3 rows of 16d Common Wire Nails at 12" o.c.	3 rows of 16d Common Wire Nails at 12" o.c.	3 rows of 1/2" Bolts at 24" o.c.	3 rows of SDS 1/4 x 6 screws at 24" o.c. (both sides)
20 to 24	4 rows of 16d Common Wire Nails at 12" o.c.	4 rows of 16d Common Wire Nails at 12" o.c.	4 rows of 1/2" Bolts at 24" o.c.	4 rows of SDS 1/4 x 6 screws at 24" o.c. (both sides)

NOTE

- Load is applied evenly across the entire member width.


<p>Bearing at concrete/masonry walls</p> <p>Provide moisture barrier at support and lateral restraint.</p> <p>1/2" air space required between concrete and wood.</p> <p>B01</p>	<p>Bearing for door or window header</p> <p>Strap per code if top plate is not continuous over header.</p> <p>Trimmers</p> <p>B02</p>	<p>Beam to beam connector</p> <p>Verify hanger capacity with hanger literature</p> <p>B03</p>
<p>Bearing at column</p> <p>VERSA-LAM® column</p> <p>Note: Drilling permitted for standard connectors.</p> <p>B04</p>	<p>Slope seat cut</p> <p>Sloped seat cut. Not to exceed inside face of bearing.</p> <p>Provide adequate lateral support</p> <p>B06</p>	<p>Bevel cut</p> <p>DO NOT bevel cut VERSA-LAM® beyond inside face of wall without approval from Boise Cascade EWP Engineering or BC CALC® software analysis.</p> <p>B07</p>
<p>Beam to concrete/masonry walls</p> <p>Wood top plate must be flush with inside of wall</p> <p>Hanger</p> <p>Moisture barrier between concrete and wood</p> <p>B08</p>	<p>Bearing framing into wall</p> <p>Strap per code if top plate is not continuous</p> <p>B09</p>	<p>DO NOT drill, notch, cut or alter VERSA-LAM® beams</p>

NOTES

- Minimum of 1/2" air space between beam and wall pocket or adequate barrier must be provided between beam and concrete/masonry.
- Adequate bearing shall be provided. If not shown on plans, please refer to load tables in your region's Specifier Guide.
- VERSA-LAM® beams are intended for interior applications only and should be kept as dry as possible during construction.
- Continuous lateral support of top of beam shall be provided (side or top bearing framing).

ALLOWABLE HOLES IN VERSA-LAM® BEAMS

- NOTES**
1. Square and rectangular holes are not permitted.
 2. Round holes may be drilled or cut with a hole saw anywhere within the shaded area of the beam.
 3. The horizontal distance between adjacent holes must be at least two times the size of the larger hole.
 4. Do not drill more than three access holes in any four foot long section of beam.
 5. The maximum round hole diameter permitted is:

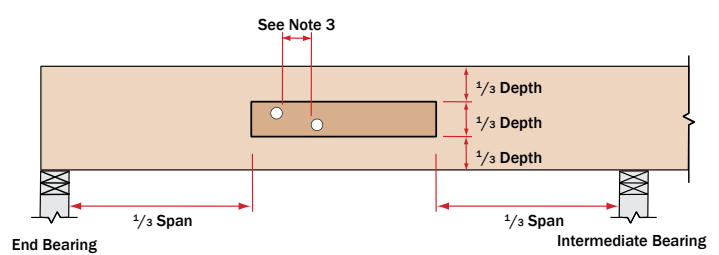

Beam Depth	Max. Hole Diameter
5 1/2"	3/4"
7 1/4"	1"
Greater than 7 1/4"	2"

6. These limitations apply to holes drilled for plumbing or wiring access only. The size and location of holes drilled for fasteners are under the regulations of the CSA O86-09 Engineering Design in Wood.
7. Beams deflect under load. Size holes to provide clearance where required.
8. This hole chart is valid for beams supporting uniform load only. For beams supporting concentrated loads or for beams with larger holes, contact Boise Cascade EWP Engineering.

VERSA-LAM® 2650Fb 1.7E						
Solid Column						
Effective length of column (ft)	Column Size (inches)					
	3½ x 3½	3½ x 5¼	3½ x 7	5¼ x 5¼	5¼ x 7	7 x 7
4	21 343	32 015	42 687	51 997	69 330	94 341
4½	20 404	30 606	40 808	51 241	68 321	93 745
5	19 341	29 012	38 682	50 326	67 101	93 011
5½	18 184	27 276	36 367	49 252	65 669	92 129
6	16 966	25 449	33 932	48 023	64 030	91 094
6½	15 723	23 584	31 445	46 647	62 197	89 901
7	14 484	21 726	28 968	45 139	60 186	88 549
7½	13 212	19 817	26 423	43 517	58 023	87 038
8	11 976	17 964	23 804	41 800	55 733	85 373
8½	10 854	16 281	21 565	40 011	53 349	83 563
9	9 838	14 756	19 539	38 174	50 899	81 616
9½	8 920	13 379	17 710	36 310	48 414	79 545
10	8 091	12 137	16 063	34 443	45 923	77 364
10½	7 345	10 972	14 579	32 590	43 452	75 088
11	6 673	9 967	13 243	30 710	40 947	72 735
11½	6 068	9 063	12 042	28 771	38 360	70 321
12	5 524	8 250	10 961	26 946	35 929	67 864
14	3 837	5 733	7 617	20 733	27 644	57 937
16				16 004	21 339	47 905
18				12 427	16 514	39 349
20				9 726	12 926	32 364

VERSA-LAM® 2800Fb 2.0E (1¼")					
Built-up Column					
Effective length of column (ft)	Column Size (inches)				
	3½ x 5½	3½ x 7¼	5¼ x 5½	5¼ x 7¼	7 x 7¼
4	28 119	37 066	46 390	61 151	83 566
4½	26 661	35 144	45 578	60 080	82 927
5	25 040	33 007	44 603	58 795	82 142
5½	23 308	30 725	43 467	57 297	81 204
6	21 524	28 372	42 178	55 599	80 107
6½	19 738	26 018	40 751	53 718	78 848
7	17 996	23 723	39 204	51 678	77 429
7½	16 334	21 426	37 559	49 510	75 854
8	14 775	19 377	35 841	47 245	74 132
8½	13 333	17 483	34 075	44 917	72 272
9	12 013	15 752	32 285	42 558	70 288
9½	10 817	14 183	30 495	40 198	68 196
10	9 711	12 770	28 726	37 865	66 013
10½	8 748	11 504	26 995	35 584	63 758
11	7 888	10 373	25 317	33 372	61 449
11½	7 121	9 365	23 703	31 245	59 105
12	6 439	8 468	22 162	29 213	56 743
14	4 380	5 761	16 804	22 150	47 445
16			12 713	16 759	38 951
18			9 686	12 739	31 672
20			7 466	9 820	25 678

NOTES:

1. The maximum factored axial loads assume a maximum eccentricity of either ¼ column width or ¼ column depth, whichever is worse.
2. These values are for preliminary design only. Final design should include a complete analysis, including bearing capacity of the foundation supporting the column. When the column is used in a wall system, review bearing resistance requirements to ensure adequacy.
3. The column is subjected to a simple axial load.
4. P - Δ effect was included in the analysis.

VERSA-STUD® & VERSA-LAM® COLUMN DETAILS

Multiple Ply Stud Connections

Thickness (in)	Number of plies	Fastener type	Fastener diameter (in)	Fastener length (in)	Min. end distance (in)	Min. edge distance (in)
1¼	2	Common Nail 3½" (16d)	0.162	3½	4.0	2.0
		SDS ¼ x 3½	0.250			
	3	Common Nail 5" (40d)	0.225	5		
		½" dia. Bolts	0.500	7		
	4	SDS ¼ x 6 (on both sides)	0.250	6		

NOTE:
The number of rows of fasteners should be as follows:

Stud/column depth	Rows of fasteners (staggered)
3½"	1
5½"	2
7¼"	2
9¼"	3
9½"	3
11¼"	3
11½"	3
14"	4

Column to Top Plate

Column to Bottom Plate

Header to Column

Boise Cascade Western Rimboard Product Profile



*18 inch and 20 inch deep rimboard are special order products, contact local supplier or Boise Cascade representative for product availability.

<p>F07 Perpendicular</p> <p>See chart for vertical load resistance.</p> <p>When used for shear transfer, nail to bearing plate with the same nailing capacity as required by the horizontal diaphragm schedule.</p>	<p>F07A Parallel</p> <p>See chart for vertical load resistance.</p> <p>When used for shear transfer, nail to bearing plate with the same nailing capacity as required by the horizontal diaphragm schedule.</p>	<p>F56</p> <p>1/2" dia through bolts (ASTM A307 Grades A&B, SAE J429 Grades 1 or 2, or higher) with washers and nuts or 1/2" dia lag screws (full penetration) 585 lbs capacity for 1 1/8" & thicker rim, 500 lbs capacity for 1" rim, per fastener</p> <p>Exterior wood sheathing</p> <p>Treated Ledger Use only fasteners that are approved for use with corresponding wood treatment.</p> <p>Boise Cascade Rimboard</p> <p>Design of moisture control by others (only structural components shown above)</p>
---	---	--

BOISE CASCADE RIMBOARD PROPERTIES

Rim Board Type	Thickness [in]	ϕH	ϕV [lb/ft]		ϕZ	ϕP
		[lb/ft]	$d \leq 16"$	$d > 16"$	[lb]	[lb]
Boise Rimboard	1"	235	5500	2750	495	5840
	1 1/8"	235	7340	5000	585	5840
Boise Rimboard Plus	1 1/8"	260	8090	5340	585	5840
Boise VERSA-STRAND 0.8E	1 1/4"	310	9460	5820	830	8990
Boise VERSA-LAM 1800 1.4	1 5/16"	SEE NOTE 6	10000	9090	585	7420

NOTES

- ϕH = Factored horizontal (shear) load transfer capacity is based on the minimum nailing attachment schedule specified in NBCC 2010 and APA document D340CA.
- ϕV = Factored uniform bearing (vertical) load resistance. The uniform bearing load shall be simultaneously satisfied with the concentrated vertical load resistance, when applicable.
- ϕZ = Factored lateral resistance of a 1/2 inch (12.7 mm) diameter lag screw.
- ϕP = Factored concentrated vertical load resistance based on 4 1/2 inch (114 mm) bearing length. The concentrated vertical load shall be simultaneously satisfied with the uniform bearing load capacity, when applicable.
- All tabulated values are applicable to the standard-term load duration and permitted to be adjusted for other load durations in accordance with CSA O86.
- Refer to 1 1/2 inch (38 mm) D. Fir Lumber at table 9.5.2 of CSA O86.
- see CCMC Evaluation Report No. 13143 for further product information on Boise Cascade EWP VERSA-STRAND 0.8E.

CEILING	Pounds Per Square Foot [PSF]
Acoustical fiber tile ⁽¹⁾	1
Suspended steel channel system ⁽¹⁾	2
Suspended wood channel system	2.5
2x8 ceiling joists @ 16" o.c., R-49 insulation, ½" gypsum board	7
1" Plaster	8
½" gypsum board	2.2
⅝" gypsum board	2.75
ROOF	Pounds Per Square Foot [PSF]
Fiberglass shingles	3
Asphalt shingles ⁽¹⁾	2
Wood shingles ⁽¹⁾	3
Spanish clay tile ⁽¹⁾	19
Composition Roofing:	
Three-ply ready roofing ⁽¹⁾	1
Four-ply felt and gravel ⁽¹⁾	5.5
Five-ply felt and gravel ⁽¹⁾	6
20 gage metal deck ⁽¹⁾	2.5
18 gage metal deck ⁽¹⁾	3
1" fiberglass batt insulation	0.04
1" loose fiberglass insulation	0.04
1" loose cellulose insulation	0.14
1" rigid insulation ⁽¹⁾	1.5
⅜" slate ⁽¹⁾	7
¼" slate ⁽¹⁾	10
Single-ply (no ballast) ⁽¹⁾	0.7
Single-ply (ballasted)	11
Dry gravel ⁽¹⁾	8.7
2x8 rafters @ 16" o.c., fiberglass shingles, 15# felt, ⅜" sheathing	8
Skylight: metal frame w/ ⅜" wire glass ⁽¹⁾	8
FLOOR	Pounds Per Square Foot [PSF]
1" reinforced regular weight concrete	12.5
1" plain lightweight concrete ⁽¹⁾	8
7/16" cementitious backerboard	3
Ceramic or quarry tile (¾") on ½" mortar bed ⁽¹⁾	16
Ceramic or quarry tile (¾") on 1" mortar bed ⁽¹⁾	23
1" mortar bed	12
1" slate ⁽¹⁾	15
⅜" marble tile	6
⅜" ceramic floor tile ⁽¹⁾	4.7
Hardwood flooring, 7/7-in ⁽¹⁾	4
¼" linoleum or asphalt tile ⁽¹⁾	1
BCI®/AJS® joists @ 16" o.c., ¾" sheathing, ½" gypsum board	10
¾" Gyp-Crete topping	6.5
Carpet & Pad	2.0
Waterproofing Membranes	
Bituminous, smooth surface ⁽¹⁾	1.5
Liquid applied ⁽¹⁾	1
MISCELLANEOUS	Pounds Per Square Foot [PSF]
1" of sand	8
1" of water	5.2
Hay: baled, dry ⁽²⁾	15 PCF ⁽²⁾
Straw: baled, dry ⁽²⁾	8 PCF ⁽²⁾
Saturated soil (garden/landscaped roof)	135 PCF
Grand piano	1000 LBS

(1) *Minimum Design Loads for Buildings and Other Structures, ASCE 7-05.*

(2) *National Farm Building Code (Canada) 1995. Value in pounds per cubic foot (PCF), multiply by maximum height to obtain PSF.*

SHEATHING	Pounds Per Square Foot [PSF]
1 1/32" or 3/8" Plywood – OSB ⁽³⁾	1.0 – 1.2
1 5/32" or 1/2" Plywood – OSB ⁽³⁾	1.4 – 1.7
1 9/32" or 5/8" Plywood – OSB ⁽³⁾	1.8 – 2.1
2 3/32" or 3/4" Plywood – OSB ⁽³⁾	2.2 – 2.5
7/8" Plywood – OSB ⁽³⁾	2.6 – 2.9
1 1/8" Plywood – OSB ⁽³⁾	3.3 – 3.6
½" cementitious backerboard	3
1 ½" softwood T & G decking	4.6
FLOOR FRAMING	Pounds Per Square Foot [PSF]
2x4 @ 16" o.c.	1.1
2x6 @ 16" o.c.	1.7
2x8 @ 16" o.c.	2.2
2x10 @ 16" o.c.	2.9
2x12 @ 16" o.c.	3.5
BCI® 4500s, 5000 or 5000s @ 12" o.c.	2.1 – 2.9
BCI® 4500s, 5000 or 5000s @ 16" o.c.	1.6 – 2.2
BCI® 4500s, 5000 or 5000s @ 19.2" o.c.	1.3 – 1.8
BCI® 4500s, 5000 or 5000s @ 24" o.c.	1.1 – 1.5
BCI® 6000 or 6000s @ 12" o.c.	2.5 – 3.4
BCI® 6000 or 6000s @ 16" o.c.	1.9 – 2.6
BCI® 6000 or 6000s @ 19.2" o.c.	1.6 – 2.1
BCI® 6000 or 6000s @ 24" o.c.	1.3 – 1.7
BCI® 60, 60s, 6500 or 6500s @ 12" o.c.	2.5 – 3.8
BCI® 60, 60s, 6500 or 6500s @ 16" o.c.	1.9 – 2.9
BCI® 60, 60s, 6000 or 6500s @ 19.2" o.c.	1.6 – 2.4
BCI® 60, 60s, 6500 or 6500s @ 24" o.c.	1.3 – 1.9
BCI® 90, 90s or 90e @ 12" o.c.	3.9 – 5.4
BCI® 90, 90s or 90e @ 16" o.c.	2.9 – 4.1
BCI® 90, 90s or 90e @ 19.2" o.c.	2.4 – 3.4
BCI® 90, 90s or 90e @ 24" o.c.	1.9 – 2.7
AJS® 140 or 20 @ 12" o.c.	2.2 – 3.3
AJS® 140 or 20 @ 16" o.c.	1.7 – 2.5
AJS® 140 or 20 @ 19.2" o.c.	1.4 – 2.1
AJS® 140 or 20 @ 24" o.c.	1.1 – 1.7
AJS® 25 @ 12" o.c.	3.1 – 5.4
AJS® 25 @ 16" o.c.	2.3 – 4.1
AJS® 25 @ 19.2" o.c.	1.9 – 3.4
AJS® 25 @ 24" o.c.	1.6 – 2.7
WALL	Pounds Per Square Foot [PSF]
5/16" x 7 1/2" fiber cement lap siding	3
4" clay brick ⁽¹⁾	39
¼" ceramic wall tile ⁽¹⁾	3.1
1 ¾" Cultured Stone	12
2x4 studs @ 16" o.c., 5/8" gypsum, insulation, 3/8" siding ⁽¹⁾	11
2x6 studs @ 16" o.c., 5/8" gypsum, insulation, 3/8" siding ⁽¹⁾	12
Wood or steel studs, ½" gypsum board each side ⁽¹⁾	8
Exterior stud walls w/ brick veneer ⁽¹⁾	48
Stucco	10
Log Wall: 10" diameter	26
Glass Block:	
4" Thick - standard (hollow)	20
3" Thick - standard (hollow)	16
4" Thick - thin face	30
3" Thick - solid glass block	40
Windows: glass, frame and sash ⁽¹⁾	8
Include at least 1.5 psf in all dead load summations to account for incidentals such as plumbing, ducts, light fixtures, etc.	

(3) *Approximate Engineering Dead Load Weight of Wood Structural Panels, APA EWS TT-019, 2005.*

Great products are only the beginning.®



Boise Cascade Engineered Wood Products are manufactured by Boise Cascade
Distributed across Canada by CanWelBroadLeaf Building Materials Division
Sold by your better local building materials retailer

 www.canwelbroadleaf.com	Langley 5350 – 275th Street Langley, BC V4W 4A3 Phone: 604 607-6885 1 800 665-3448	Saskatoon 11 Capital Circle Corman Park, SK S7R 0H4 Phone: 306 933-2500 1 877 954-4448	Brampton 15 West Drive Brampton, ON L6T 3T5 Phone: 905 792-9903 1 800 792-9903	Dartmouth 70 Simmonds Drive Dartmouth, NS B3B 1P6 Phone: 902 468-9865 1 800 565-7913
	Kelowna 205 Campion Street Kelowna, BC V1X 7S9 Phone: 250 765-2036 1 877 488-8899	Regina 1055 Fleury Street Regina, SK S4N 4W9 Phone: 306 569-9071 1 800 567-6226	Ottawa 700 Industriel Avenue, Suite 401 Ottawa, ON K1G 0Y9 Phone: 613 247-8682 1 800 267-1305	Deer Lake 10 Spillway Road Dear lake, NL A8A 3E7 Phone: 709 635-4345 1 800 563-7517
	Calgary 4510 – 76th Ave S.E. Calgary, AB T2C 2V2 Phone: 403 279-7108 1 877 656-6166	Winnipeg 350 De Baets Street Winnipeg, MB R2J 0H4 Phone: 204 633-4890 1 800 665-1923	Blainville 651, boulevard Industriel Blainville, QC J7C 3V3 Phone: 450 435-6911 1 800 361-5345	St-John's 42 Sagona Avenue Donovans Industriel Park Mount-Pearl, NL A1N 4R3 Phone: 709 745-6760 1 888 745-6760
	Edmonton 11553 – 154th Street Edmonton, AB T5M 3N7 Phone: 780 451-3850 1 800 268-7569	Sudbury 725 Martindale Road Sudbury, ON P3E 4P8 Phone: 705 674-6469 1 800 461-1105	Québec 170, Liverpool St-Augustin-de-Desmaures, QC G3A 2M5 Phone: 418 878-6081 1 877 877-6081	

Your local retailer

The information provided herein was up-to-date at the time of printing. This document may be superseded by a updated version. Please confirm that this specifier guide is the most current version at www.BCewp.com.

CCMC Report Number
12472-R VERSA-LAM®

The information in this document pertains to use in CANADA ONLY, Limit States Design. Refer to the US VERSA-LAM® Specifier Guide for use in the United States.

455, boulevard Fénelon, suite 102
Dorval (Québec) H9S 5T8
email: ewp_canada@bc.com
www.BC.com/ewp



© 2011 Boise Cascade, L.L.C.
BCI, ALLJOIST, BC CALC, BC FRAMER, BC RIM BOARD, BOISE CASCADE, BOISE GLULAM, SIMPLE FRAMING SYSTEM, VERSA-LAM, VERSA-RIM, VERSA-STRAND and VERSA-STUD are trademarks of Boise Cascade, L.L.C. or its affiliates.